

QBiP-8665A/ QBiP-8365A

3.5" SBC Boards
User's Manual 1st Ed

Copyright Notice

This document is copyrighted, 2021. All rights are reserved. The original manufacturer reserves the right to make improvements to the products described in this manual at any time without notice.

No part of this manual may be reproduced, copied, translated, or transmitted in any form or by any means without the prior written permission of the original manufacturer. Information provided in this manual is intended to be accurate and reliable. However, the original manufacturer assumes no responsibility for its use, or for any infringements upon the rights of third parties that may result from its use.

The material in this document is for product information only and is subject to change without notice. While reasonable efforts have been made in the preparation of this document to assure its accuracy, GIGAIPC assumes no liabilities resulting from errors or omissions in this document, or from the use of the information contained herein.

GIGAIPC reserves the right to make changes in the product design without notice to its users.

Acknowledgement

All other products' name or trademarks are properties of their respective owners.

- AMD® is trademark of Advanced Micro Devices.
- Microsoft Windows is a registered trademark of Microsoft Corp.
- Intel, Pentium, Celeron, and Xeon are registered trademarks of Intel Corporation
- Core, Atom are trademarks of Intel Corporation
- ITE is a trademark of Integrated Technology Express, Inc.
- IBM, PC/AT, PS/2, and VGA are trademarks of International Business Machines Corporation.

All other product names or trademarks are properties of their respective owners.

Packing List

Before setting up your product, please make sure the following items have been shipped:

Item	Quantity
QBiP-8665A/ QBiP-8365A	1
SATA power cable	1

If any of these items are missing or damaged, please contact your distributor or sales representative immediately.

About this Document

This User's Manual contains all the essential information, such as detailed descriptions and explanations on the product's hardware and software features (if any), its specifications, dimensions, jumper/connector settings/definitions, and driver installation instructions (if any), to facilitate users in setting up their product.

Users may refer to the GIGAIPC.com for the latest version of this document.

Safety Precautions

Please read the following safety instructions carefully. It is advised that you keep this manual for future references

1. All cautions and warnings on the device should be noted.
2. Make sure the power source matches the power rating of the device.
3. Position the power cord so that people cannot step on it. Do not place anything over the power cord.
4. Always completely disconnect the power before working on the system's hardware.
5. No connections should be made when the system is powered as a sudden rush of power may damage sensitive electronic components.
6. If the device is not to be used for a long time, disconnect it from the power supply to avoid damage by transient over-voltage.
7. Always disconnect this device from any AC supply before cleaning.
8. While cleaning, use a damp cloth instead of liquid or spray detergents.
9. Make sure the device is installed near a power outlet and is easily accessible.
10. Keep this device away from humidity.
11. Place the device on a solid surface during installation to prevent falls
12. Do not cover the openings on the device to ensure optimal heat dissipation.
13. Watch out for high temperatures when the system is running.

14. Do not touch the heat sink or heat spreader when the system is running
15. Never pour any liquid into the openings. This could cause fire or electric shock.
16. As most electronic components are sensitive to static electrical charge, be sure to ground yourself to prevent static charge when installing the internal components. Use a grounding wrist strap and contain all electronic components in any static-shielded containers.
17. If any of the following situations arises, please the contact our service personnel:
 - i. Damaged power cord or plug
 - ii. Liquid intrusion to the device
 - iii. Exposure to moisture
 - iv. Device is not working as expected or in a manner as described in this manual
 - v. The device is dropped or damaged
 - vi. Any obvious signs of damage displayed on the device

18. DO NOT LEAVE THIS DEVICE IN AN UNCONTROLLED ENVIRONMENT WITH TEMPERATURES BEYOND THE DEVICE'S PERMITTED STORAGE TEMPERATURES (SEE CHAPTER 1) TO PREVENT DAMAGE.

FCC Statement

Warning!



This device complies with Part 15 FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received including interference that may cause undesired operation.

Caution:

There is a danger of explosion if the battery is incorrectly replaced. Replace only with the same or equivalent type recommended by the manufacturer. Dispose of used batteries according to the manufacturer's instructions and your local government's recycling or disposal directives.

Attention:

Il y a un risque d'explosion si la batterie est remplacée de façon incorrecte. Ne la remplacer qu'avec le même modèle ou équivalent recommandé par le constructeur. Recycler les batteries usées en accord avec les instructions du fabricant et les directives gouvernementales de recyclage.

China RoHS Requirements (CN)

产品中有毒有害物质或元素名称及含量

GIGAIPC Main Board/ Daughter Board/ Backplane

部件名称	有毒有害物质或元素					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
印刷电路板 及其电子组件	○	○	○	○	○	○
外部信号 连接器及线材	○	○	○	○	○	○

○: 表示该有毒有害物质在该部件所有均质材料中的含量均在 SJ/T 11363-2006 标准规定的限量要求以下。

X: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出 SJ/T 11363-2006 标准规定的限量要求。

备注: 此产品所标示之环保使用期限, 系指在一般正常使用状况下。

China RoHS Requirement (EN)

Poisonous or Hazardous Substances or Elements in Products GIGAIPC Main Board/ Daughter Board/ Backplane

Component	Poisonous or Hazardous Substances or Elements					
	Lead (Pb)	Mercury (Hg)	Cadmium (Cd)	Hexavalent Chromium (Cr(VI))	Polybrominated Biphenyls (PBB)	Polybrominated Diphenyl Ethers (PBDE)
PCB & Other Components	○	○	○	○	○	○
Wires & Connectors for External Connections	○	○	○	○	○	○

O : The quantity of poisonous or hazardous substances or elements found in each of the component's parts is below the SJ/T 11363-2006-stipulated requirement.
X: The quantity of poisonous or hazardous substances or elements found in at least one of the component's parts is beyond the SJ/T 11363-2006-stipulated requirement.
Note: The Environment Friendly Use Period as labeled on this product is applicable under normal usage only

Table Contents

3.5" SBC Boards	1
User's Manual 1st Ed	
Copyright Notice	2
Acknowledgement	3
Packing List.....	4
About this Document	5
Safety Precautions	6
FCC Statement.....	8
China RoHS Requirements (CN).....	9
China RoHS Requirement (EN)	10
Chapter 1 - Product Specifications	14
QBiP-8665A/ QBiP-8365A	
1.1 Specifications- QBiP-8665A/ 8365A	16
Chapter 2 – Hardware Information	18
2.1 Jumpers and Connectors	19
2.2.1 CPU FAN (CPU FAN connector)	22
2.2.2 System FAN (System FAN connector)	23
2.2.3 JCOM1 (COM1 RI# pin RI#/5V/12V Select).....	24
2.2.4 COM2, COM3, COM4 (Serial port header, RS-232).....	25
2.2.5 FUSB (USB 2.0 header)	26
2.2.6 SATAIII_0, SATAIII_1 (SATA 6Gb/s Connector)	27
2.2.7 GPIO_CNT (General Purpose input/output header)	28

2.2.8	SATAPW1, SATAPW2 (SATA power connector)	29
2.2.9	AT_CN (AT/ATX mode select jumper).....	30
2.2.10	DC_IN (DC IN 1x4-pin power connector).....	31
2.2.11	SPK_OUT (Speaker out connector).....	32
2.2.12	FP_Audio (Front Audio connector)	33
2.2.13	BKL_CN (Backlight Control connector)	34
2.2.14	SYS_PANEL (Front panel header)	35
2.2.15	LVDS (LVDS connector).....	36
2.2.16	LSW (LVDS resolution jumper)	37
2.2.17	BATTERY (Battery cable connector).....	38
2.2.18	LPC_CN (LPC Connector)	39
2.2.19	SODIMM1, SODIMM2 (DDR4 SO-DIMM Slot).....	40
2.2.20	M2E (M.2 Slot, E-Key, NGFF2230, WiFi & Bluetooth module).....	41
2.2.21	MPCIE (Mini PCIe full size, support 3G/4G module)	42
2.2.22	M2M (M.2 Slot, SATA/PCIe x4, NGFF2280).....	43
2.2.23	SIM_CARD (SIM Card slot)	44
2.2.24	RUSB31_1, RUSB31_2 (USB 3.2 Gen 2x1 connector).....	45
2.2.25	HDMI21 (HDMI connector).....	46
2.2.26	LAN1, LAN2 (LAN connector).....	47
2.2.27	COM1 (Serial port connector, RS-232/422/485 & RI/5V/12V).....	48




Chapter 3 – BIOS 50

3.1	Introduction	51
3.2	The Main Menu.....	52

3.3	Advanced	53
3.3.1	AMT Configuration	54
3.3.2	TPM Configuration.....	60
3.3.2	SATA And RST Configuration.....	62
3.3.3	CPU Configuration	63
3.3.4	Super I/O Configuration.....	64
3.3.5	Hardware Monitor	65
3.3.6	S5 RTC Wake Settings	66
3.3.7	CSM Configuration.....	67
3.3.8	NVMe Configuration.....	68
3.3.9	Offboard SATA Controller Configuration	69
3.3.10	Digital IO Port Configuration	70
3.4	Chipset	71
3.5	Security	72
3.6	Boot.....	75
3.7	Save & Exit	76

Chapter 1

Chapter 1 - Product Specifications QBiP-8665A/ QBiP-8365A

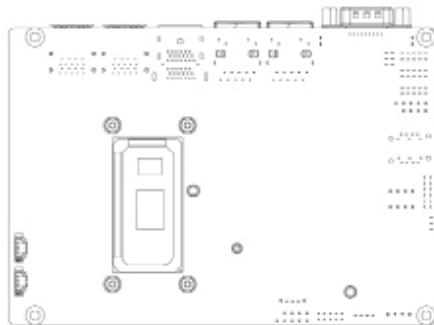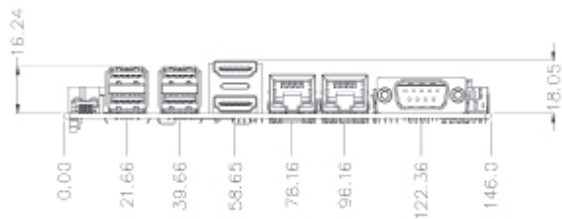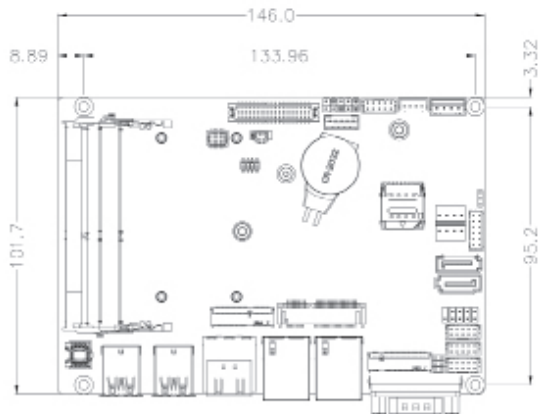

1.1 Specifications- QBiP-8665A/ 8365A


Motherboard	QBiP-8665A	QBiP-8365A
Form Factor	3.5" SBC 146W x 101.7D (mm)	
CPU	Intel® Core™ i7-8665UE Processor 14nm, 4 cores, 8 threads, up to 4.40 GHz vPro support, TDP 15W 8 MB Intel® Smart Cache	Intel® Core™ i5-8365UE Processor 14nm, 4 cores, 8 threads, up to 4.10 GHz vPro support, TDP 15W 6 MB Intel® Smart Cache
Socket	1 x FCBGA1528	
Chipset	—	
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB Support Dual Channel DDR4 2400 MHz memory modules	
Ethernet	2 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)	
Video	Integrated Graphics Processor - Intel® UHD Graphics 620: 2 x HDMI 1.4 port, supporting a maximum resolution of 4096x2304 @24Hz 1 x LVDS port, supporting a maximum resolution of 1920x1080 @60Hz * Support up to 3 displays at the same time	
Audio	Realtek® Audio Codec	
Storage	2 x SATA 6Gb/s Ports	
Raid	Intel® SATA RAID 0/1/5	
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot (PCIe x1 + USB2.0) -- support 3G/4G module	

Motherboard	QBiP-8665A	QBiP-8365A
Internal I/O	<ul style="list-style-type: none"> 1 x 4-pin box power header (DC in +9V~36VDC) (+48VDC for Optional) 2 x SATA Power headers 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 3 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBUS header 	
Rear I/O	<ul style="list-style-type: none"> 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 	
TPM	1 x TPM header	
OS Compatibility	Windows® 10 (x64)	
Operating Properties	<ul style="list-style-type: none"> Operating temperature: 0°C to 60°C Operating humidity: 0-90% (non-condensing) Non-operating temperature: -40°C to 85°C Non-operating humidity: 0%-95% (non-condensing) 	

Chapter 2

Chapter 2 – Hardware Information

2.1 Jumpers and Connectors

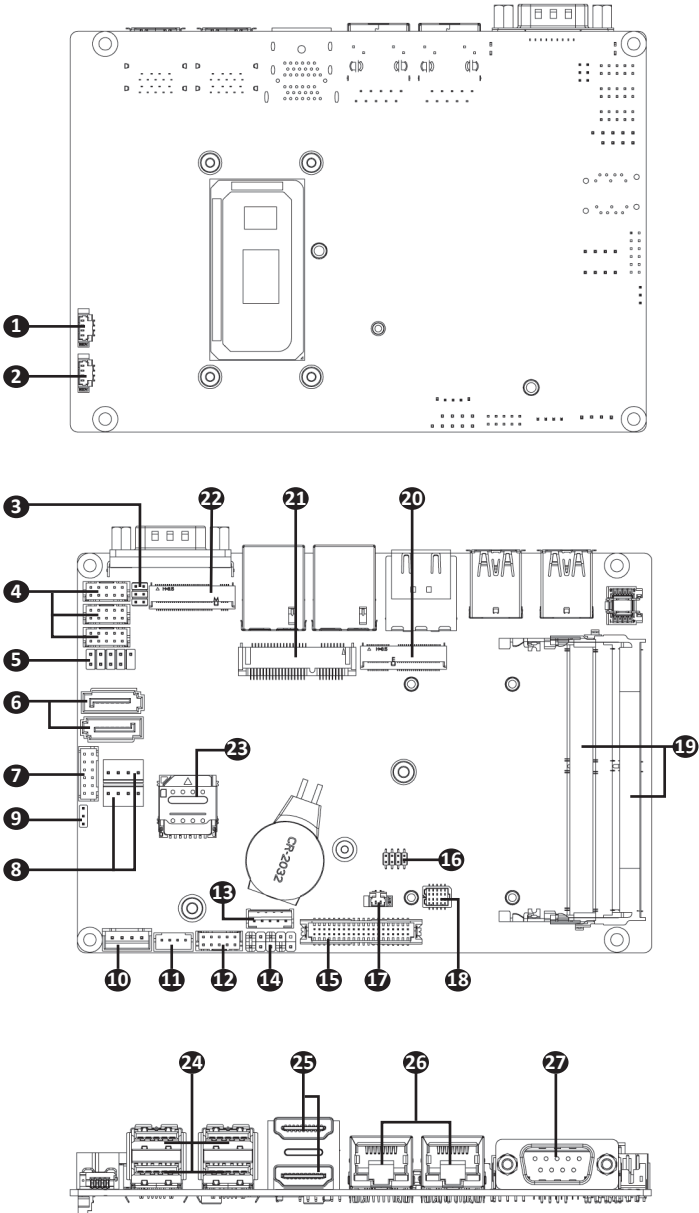


No	Code	Description
1	CPU FAN	CPU FAN connector
2	SYS FAN	System FAN connector
3	JCOM1	COM1 (COM RI# pin RI#/5V/12V Select)
4	COM2 COM3 COM4	Serial port header (RS-232)
5	FUSB	USB 2.0 header
6	SATAIII1 SATAIII0	SATA 6GB/s Connector
7	GPIO_CNT	General purpose input/output header
8	SATAPW1 SATAPW2	SATA power connector
9	AT_CN	AT/ATX mode select jumper
10	DC_IN	DC IN 1x4 pin power connector
11	SPK_OUT	Speaker out connector
12	FP_Audio	Front Audio connector
13	BKL_CN	Backlight Control connector
14	SYS_PANEL	Front panel header
15	LVDS	LVDS connector
16	LSW	LVDS resolution jumper
17	BATTERY	Battery cable connector
18	LPC_CN	LPC Connector
19	SODIMM1 SODIMM2	DDR4 SO-DIMM Slot

No	Code	Description
20	M2E	M.2 Slot, E-key, NGFF2230, WiFi & Bluetooth module
21	MPCIE	Mini PCIe full size, support 3G/4G module
22	M2M	M.2 Slot, SATA/PCIe x4, NGFF2280
23	SIM-CARD	SIM Card slot
24	RUSB31_1 RUSB31_2	USB 3.2 Gen 2x1 Connector x 4
25	HDMI21	HDMI connector
26	LAN1, LAN2	LAN connector
27	COM1	Serial port connector (RS-232/422/485 & RI/5V/12V)

2.2.1 CPU FAN (CPU FAN connector)

1

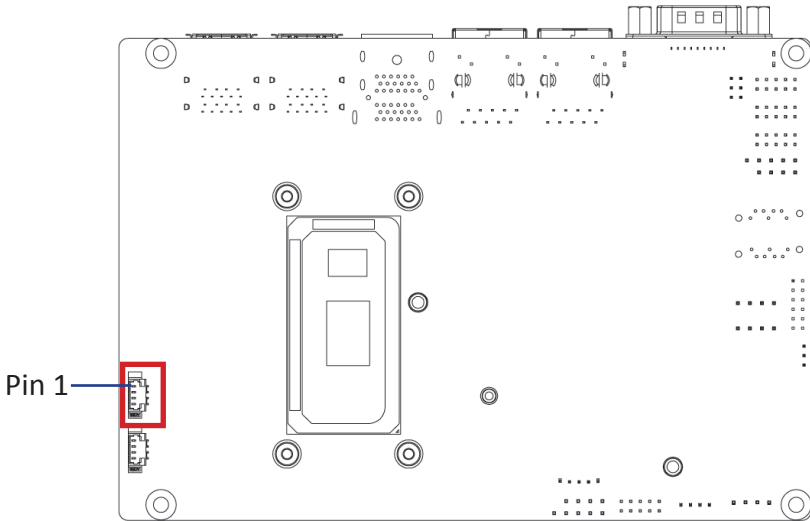

Pin 1

CPU FAN connector





Connector PN	Vendor
85205-0470N	ACES
A1250WV-S-04PC	JOINT-TECH

Pin No.	Definition
1	GND
2	12V
3	Detect
4	Speed Control

2.2.2 System FAN (System FAN connector)

2

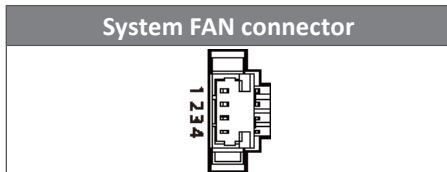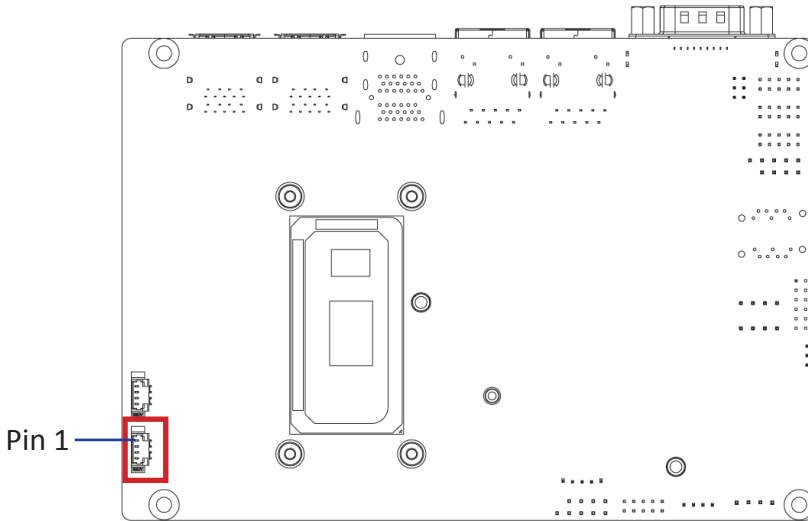


Connector PN	Vendor
85205-0470N	ACES
A1250WV-S-04PC	JOINT-TECH

Pin No.	Definition
1	GND
2	12V
3	Detect
4	Speed Control

2.2.3 JCOM1 (COM1 RI# pin RI#/5V/12V Select)

3


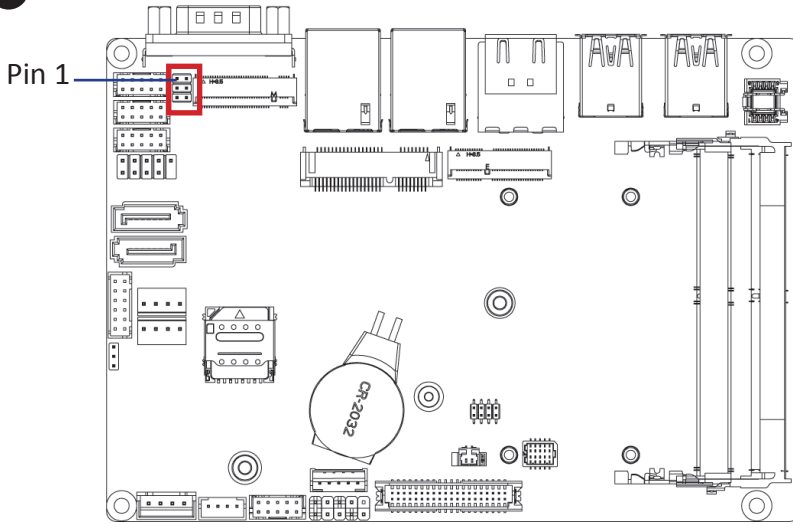


JCOM11 Jumper Select	
	1-2 Close: 5V (Power COM)
	3-4 Close: RI (Stand COM) (Default-Setting)
	5-6 Close: 12V (Power COM)

Connector PN	Vendor
220-97-03GB01	PINREX
PH06N53BAZ000	HORNGTONG

2.2.4 COM2, COM3, COM4 (Serial port header, RS-232)

4

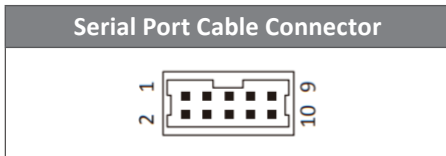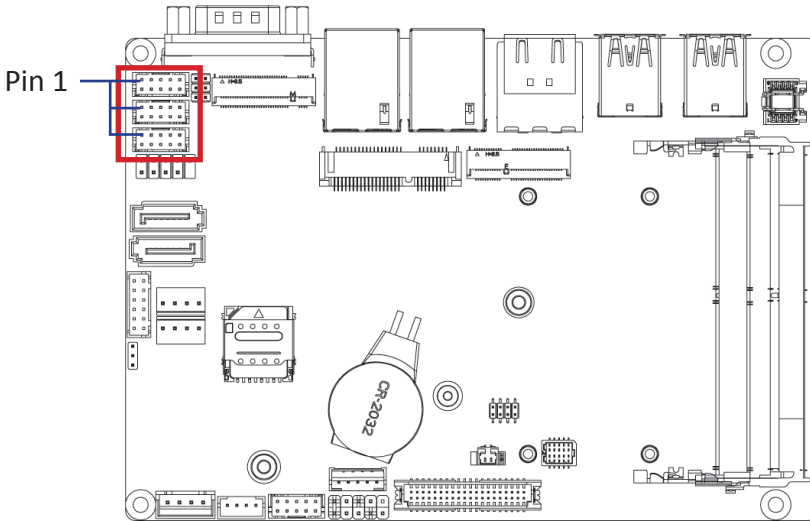


Connector PN	Vendor
725-81-10TW00	PINREX
A2004WV-2X05P46	JOINT-TECH


Pin No.	Definition
1	RXD
2	DCD
3	DTR
4	TXD
5	DSR
6	GND
7	CTS
8	RTS
9	No Connect
10	RI/ 5V/ 12V

2.2.5 FUSB (USB 2.0 header)

5

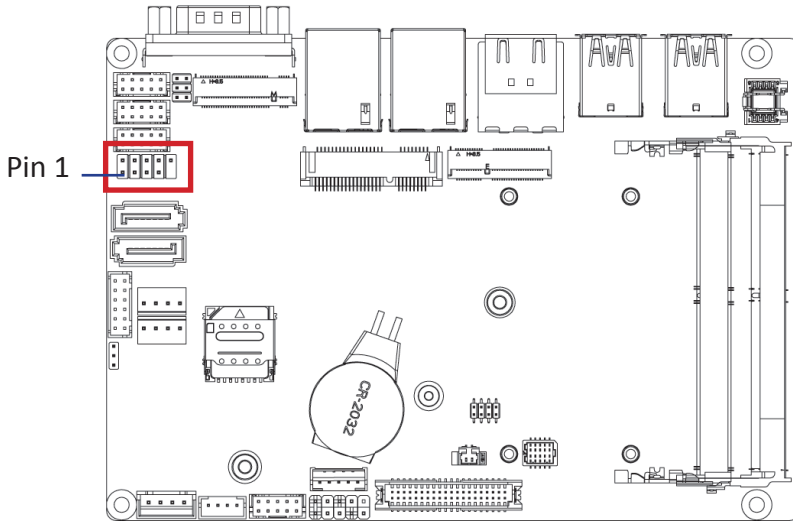

USB 2.0 Header



Connector PN

210-92-05GB04

Vendor

PINREX

PH10R53BAZ009


HORNGTONG

Pin No. Definition

Pin No.	Definition
1	5V
2	5V
3	DX-
4	DY-
5	DX+
6	DY+
7	GND
8	GND
9	No Pin
10	No Connect

2.2.6 SATAIII_0, SATAIII_1 (SATA 6Gb/s Connector)

6

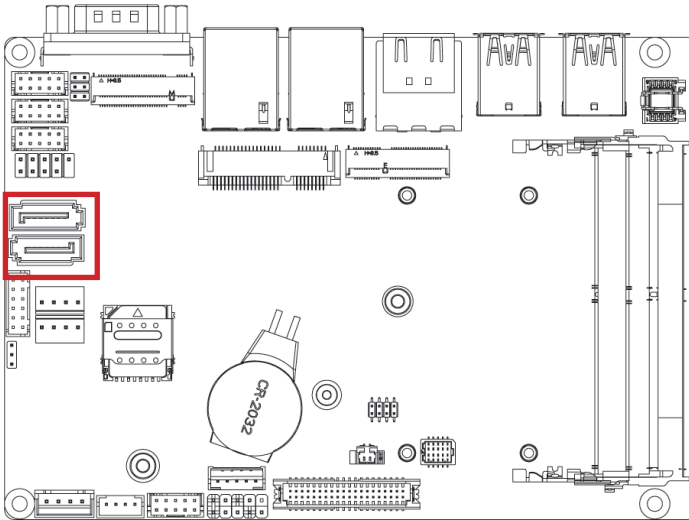

SATA Connector




SATAIII_1,SATAIII_0

Connector PN	Vendor
WATM-07ABNB2BAUW3	WINWIN
770-83-07SW19	PINREX


Pin No.	Definition
1	GND
2	TXP
3	TXN
4	GND
5	RXN
6	RXP
7	GND

2.2.7 GPIO_CNT (General Purpose input/output header)

7

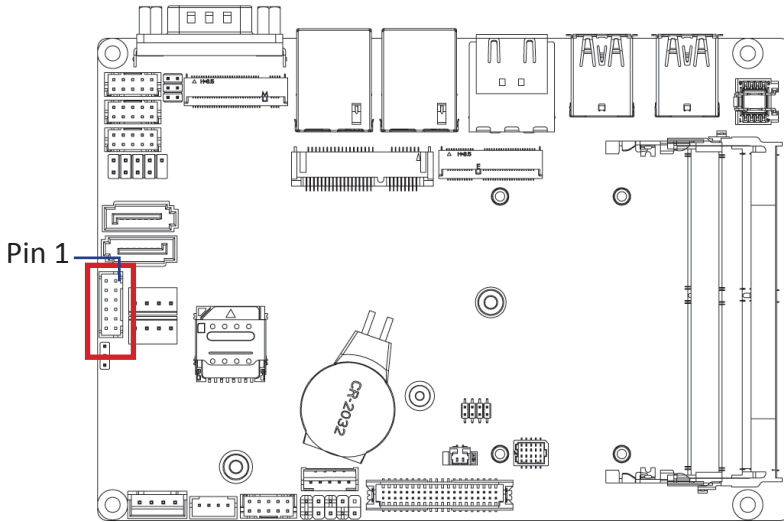

GPIO Connector



Connector PN

725-81-12TW00

A2004WV-2X06P46

Vendor

PINREX


JOINT-TECH

Pin No. Definition

Pin No.	Definition
1	GPIO-output_1
2	GPIO-input_1
3	GPIO-output_2
4	GPIO-input_2
5	GPIO-output_3
6	GPIO-input_3
7	GPIO-output_4
8	GPIO-input_4
9	SMBus Clock
10	SMBus DATA
11	5V
12	GND

2.2.8 SATAPW1, SATAPW2 (SATA power connector)

8

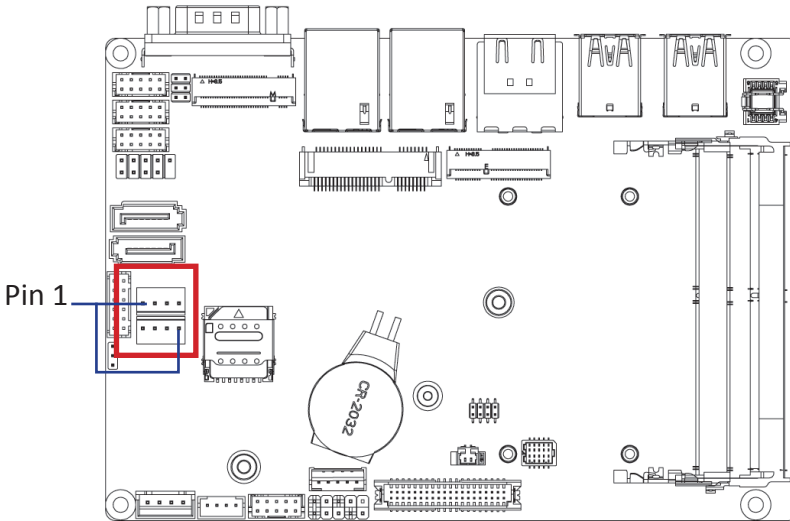

Hard Disk Power Connector



Connector PN

Vendor

743-81-04TW00

PINREX

WF04Q2-3BJQ000

HORNGTONG

Pin No.

Definition

1

12V

2

GND

3


GND

4

5V

2.2.9 AT_CN (AT/ATX mode select jumper)

9

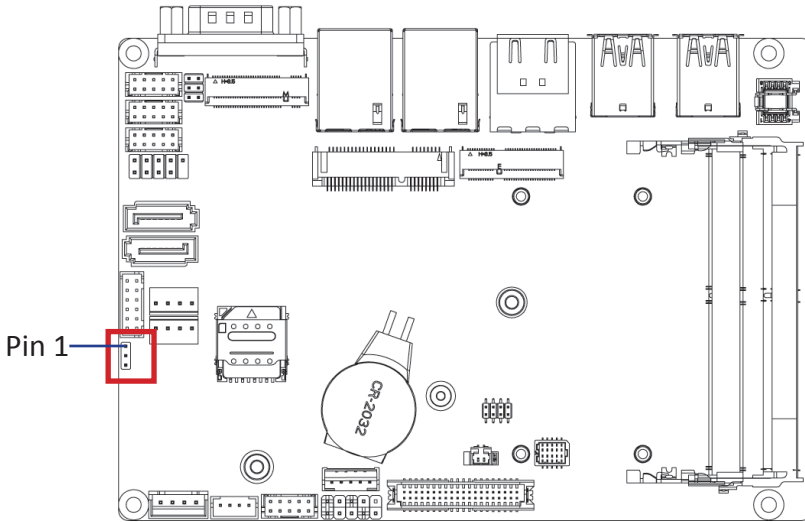

AT/ATX power mode select jumper



Connector PN

220-96-03GB01

PH03N2-7BAN000

Vendor

PINREX

HORNGTONG

Pin No. Definition

1 AT MODE

2 TXD5

3 ATX MODE



Jumper setting

1-2 Close : AT mode.

2-3 Close : ATX mode.(Default setting)

2.2.10 DC_IN (DC IN 1x4-pin power connector)

10

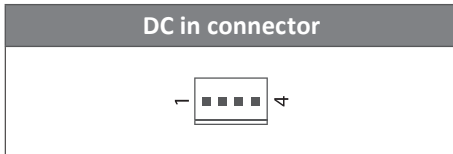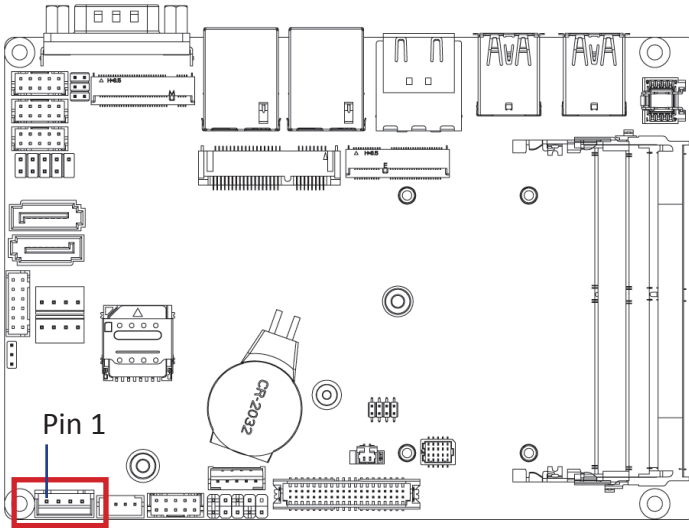


Connector PN	Vendor
753-81-04TW00	PINREX

Pin No.	Definition
1	GND
2	Power
3	Power
4	GND

2.2.11 SPK_OUT (Speaker out connector)

11

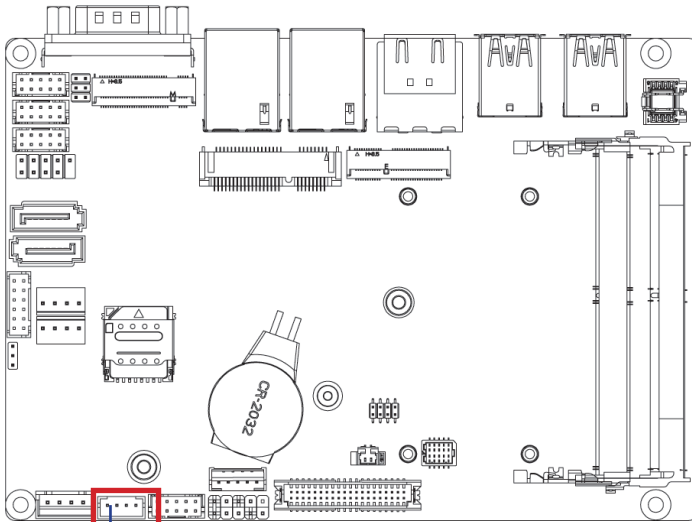

Pin 1

Audio Amplifie Connector





1

Connector PN	Vendor
721-81-045W00	PINREX
A2001WV-04P146	JOINT-TECH

Pin No.	Definition
1	Speaker Out L+
2	Speaker Out L-
3	Speaker Out R-
4	Speaker Out R+

2.2.12 FP_Audio (Front Audio connector)

12

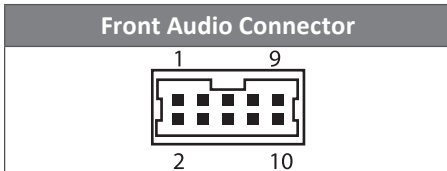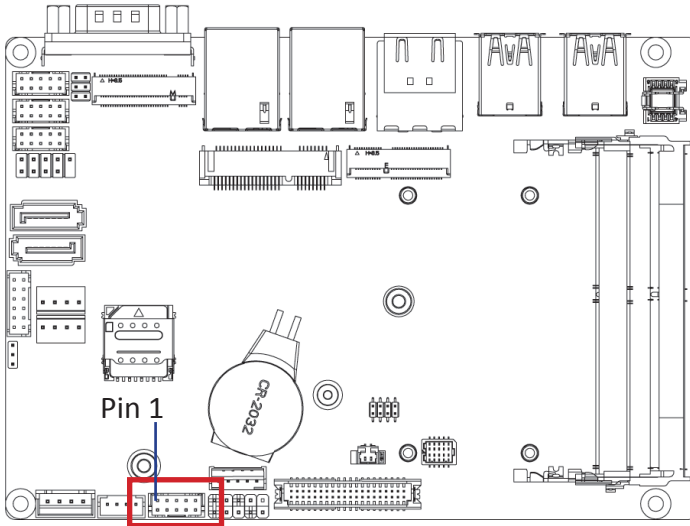


Connector PN	Vendor
725-81-10TW00	PINREX
A2004WV-2X05P46	JOINT-TECH

Pin No.	Definition
1	MIC_L
2	GND
3	MIC_R
4	Detect
5	HPOUT_R
6	MIC_JD
7	FAUDIO_JD
8	No Connect
9	HPOUT_L
10	GND

2.2.13 BKL_CN (Backlight Control connector)

13

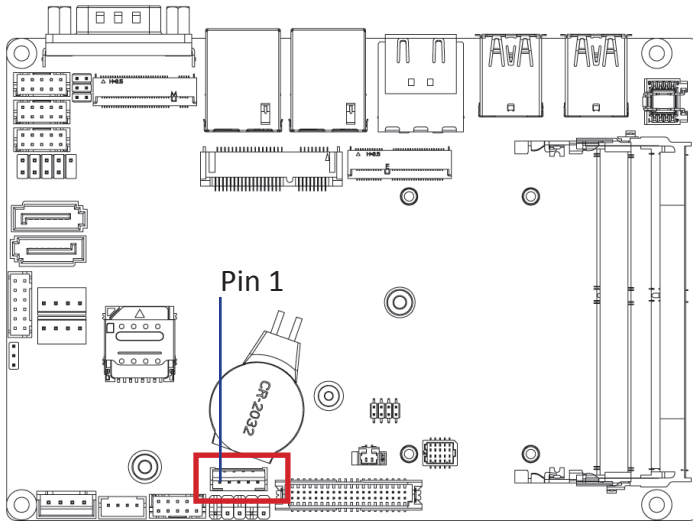

Backlight Control connector



Connector PN

721-81-05TW00

A2001WV-05P146

Vendor

PINREX

JOINT-TECH

Pin No.

Definition

1

5V

2

PWM

3

Backlight Enable

4


GND

5

12V

2.2.14 SYS_PANEL (Front panel header)

14

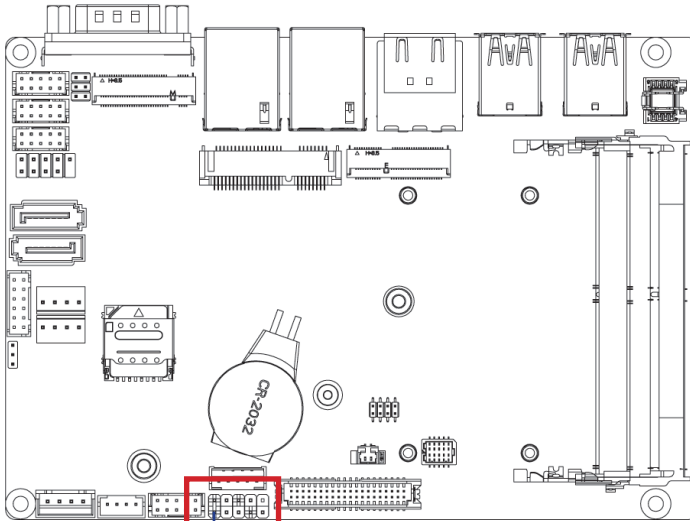

Pin 1


System Panel Header	
2	10
1	9

Connector PN	Vendor
210-92-05G111	PINREX


Pin No.	Definition
1	HDD LED+
2	Power LED+
3	HDD LED-
4	Power LED-
5	GND
6	Power Button+
7	Reset Button
8	Power Button-
9	No Connect
10	No Pin

2.2.15 LVDS (LVDS connector)

15

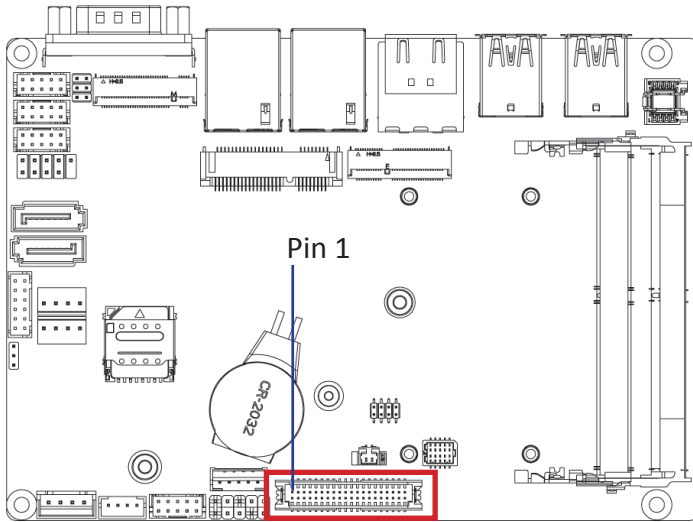

LVDS Connector



Pin No.	Definition	Pin No.	Definition
1	3.3V	21	A5+
2	5V	22	A4+
3	3.3V	23	A5-
4	5V	24	A4-
5	SPECO	25	GND
6	SPEDO	26	GND
7	GND	27	A7+
8	GND	28	A6+
9	A1+	29	A7-
10	A0+	30	A6-
11	A1-	31	GND
12	A0-	32	GND
13	GND	33	CLK2+
14	GND	34	CLK1+
15	A3+	35	CLK2-
16	A2+	36	CLK1-
17	A3-	37	GND
18	A2-	38	GND
19	GND	39	12V
20	GND	40	12V

Connector PN

Vendor


712-76-40GWE0	PINREX
A1252WV-SF-2X20PD01	JOINT-TECH

For each model support LVDS function.
But below model no need to add.
A0~A3 is odd channel 0~3, A4~A7 is evn channel.







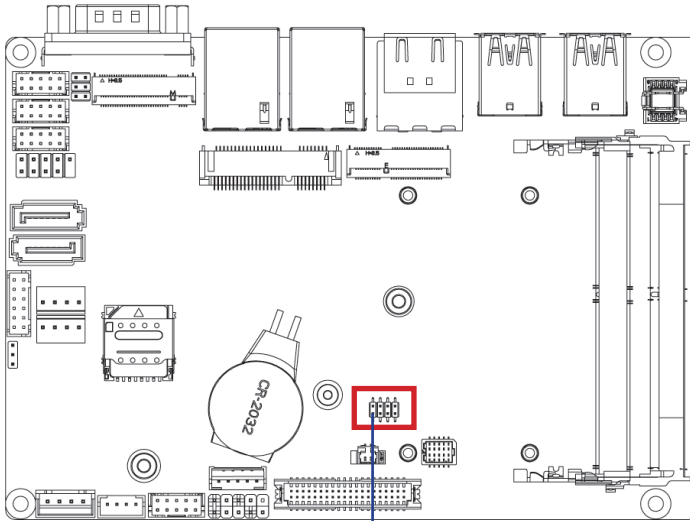









Note: *The LVDS output connector of the unit is only intended to be connected to an UL/IEC/EN approval equipment with fire enclosure.

2.2.16 LSW (LVDS resolution jumper)

16




Pin 1

LVDS Resolution Jumper			
Jumper Setting	Resolution	Jumper Setting	Resolution
1  8	800 x 600 18bit	1  8	1366 x 768 24bit
1  8	1024 x 768 18bit	1  8	1440 x 900 24bit
1  8	1024 x 768 24bit	1  8	1400 x 1050 24bit
1  8	1024 x 600 18bit	1  8	1600 x 900 24bit
1  8	1280 x 800 18bit	1  8	1680 x 1050 24bit
1  8	1280 x 960 18bit	1  8	1600 x 1200 24bit
1  8	1280 x 1024 24bit	1  8	1920 x 1080 24bit
1  8	1366 x 768 18bit	1  8	1920 x 1200 24bit


Connector PN	Vendor
222-97-04GBE1	PINREX

2.2.17 BATTERY (Battery cable connector)

17

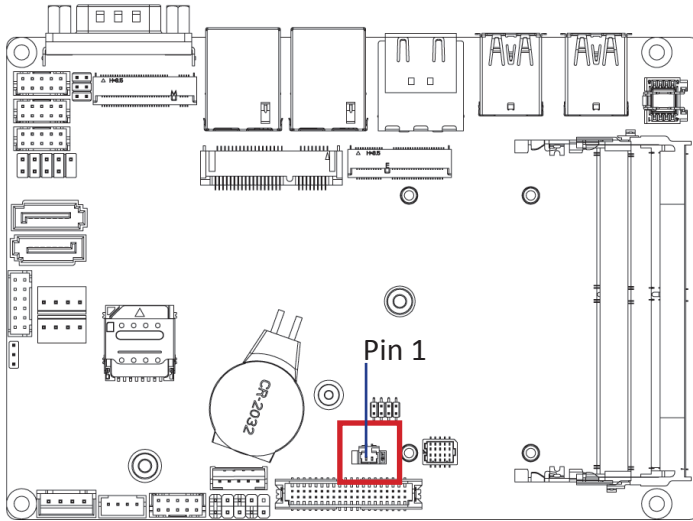

Battery Cable Connector



Connector PN

85205-0270L

Vendor

ACES

A1250WV-S-02PC

JOINT-TECH

Pin No.

Definition

1



3.3V

2

GND

2.2.18 LPC_CN (LPC Connector)


18

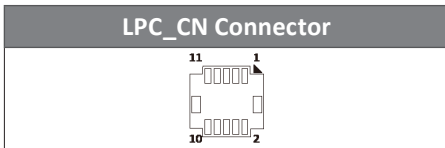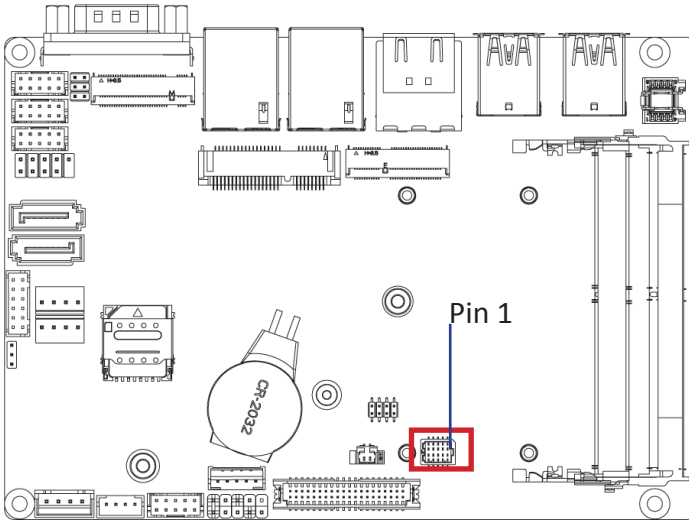

Pin No.	Definition
1	CK_LPC1
2	GND
3	LFRAME#
4	LAD0
5	PLT_RST_80H
6	LAD1
7	LAD3
8	LAD2
9	3.3V
10	SERIRQ


2.2.19 SODIMM1, SODIMM2 (DDR4 SO-DIMM Slot)

19

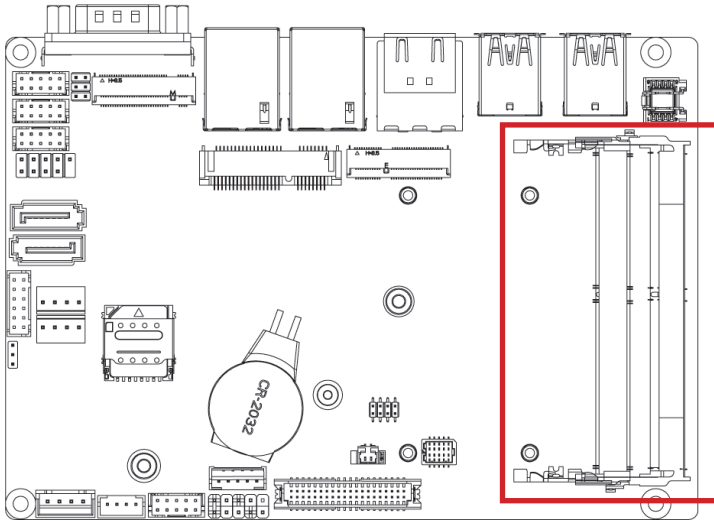

2.2.20 M2E (M.2 Slot, E-Key, NGFF2230, WiFi & Bluetooth module)

20

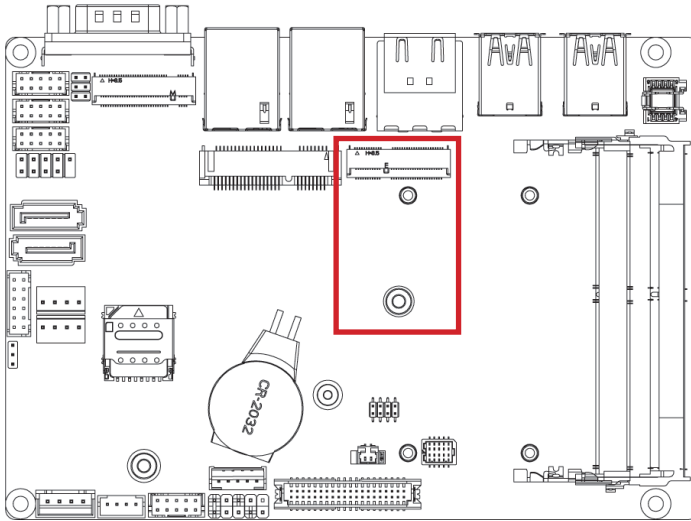

M.2 E Key Connector



Pin No.	Definition	Pin No.	Definition
1	GND	2	3V
3	USB_D+	4	3V
5	USB_D-	6	NC
7	GND	8	NC
9	NC	10	NC
11	NC	12	NC
13	NC	14	NC
15	NC	16	NC
17	NC	18	GND
19	NC	20	BT_WAKE
21	NC	22	NC
23	NC		


Pin No.	Definition	Pin No.	Definition
33	GND	32	NC
35	WLAN_TXp	34	NC
37	WLAN_TXn	36	NC
39	GND	38	CL_RST#

41	WLAN_RXp	40	CL_DATA
43	WLAN_RXn	42	CL_CLK
45	GND	44	NC
47	CLK_DP	46	NC
49	CLK_DN	48	NC
51	GND	50	SUSCLK
53	CLK_REQ	52	PLT_RST#
55	PCIE_WAKE	54	BT_Disable#
57	GND	56	WIFI_Disable#
59	NC	58	NC
61	NC	60	NC
63	GND	62	NC
65	NC	64	NC
67	NC	66	NC
69	GND	68	NC
71	NC	70	NC
73	NC	72	3V
75	GND	74	3V


Connector PN	Vendor
APCI0095-P002A	LOTES
80152-8521	BELLWETHER

2.2.21 MPCIE (Mini PCIe full size, support 3G/4G module)

21

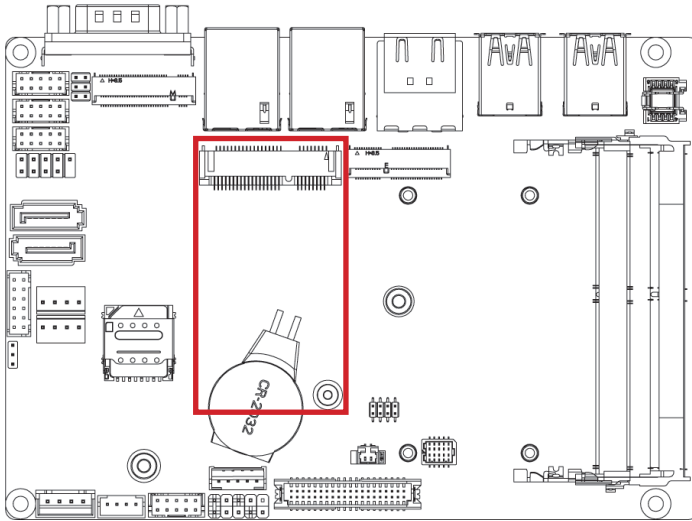

Mini PCIe Connector




Pin No.	Definition	Pin No.	Definition
1	PCIE_WAKE#	2	3.3V
3	NC	4	GND
5	NC	6	1.5V
7	PCIE_CLKREQ#	8	SIM_PWR
9	GND	10	SIM_DATA
11	PCIE_CLK#	12	SIM_CLK
13	PCIE_CLK	14	SIM_RST
15	GND	16	SIM_VPP
17	NC	18	GND
19	NC	20	PCIE_DISABLE
21	GND	22	PCIRST#
23	PCIE_RXn	24	3.3V
25	PCIE_RXp	26	GND
27	GND	28	1.5V
29	GND	30	SMBCLK
31	PCIE_TXn	32	SMBDATA
33	PCIE_TXp	34	GND

35	GND	36	USB-
37	GND	38	USB+
39	3.3V	40	GND
41	3.3V	42	NC
43	GND	44	NC
45	NC	46	NC
47	NC	48	1.5V
49	NC	50	GND
51	NC	52	3.3V

Connector PN	Vendor
AS0B221-S99Q-7H	FOXCONN

2.2.22 M2M (M.2 Slot, SATA/PCIe x4, NGFF2280)

22

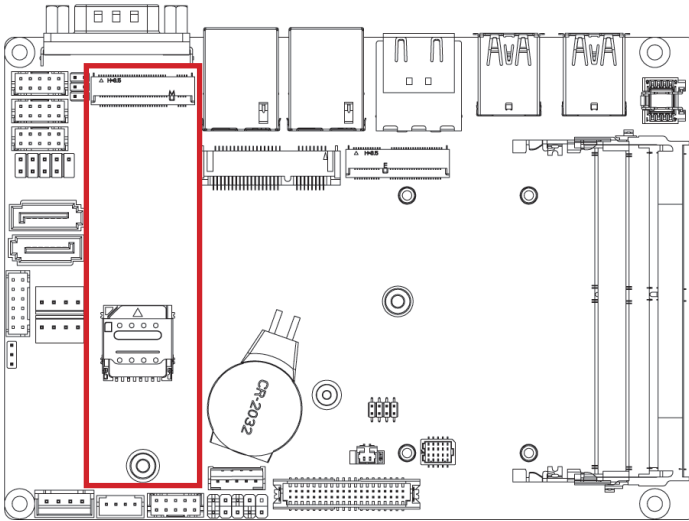

M.2 M Key Connector



Pin No.	Definition	Pin No.	Definition
1	GND	2	3.3V
3	GND	4	3.3V
5	NC	6	NC
7	NC	8	NC
9	GND	10	M2_LED
11	NC	12	3.3V
13	NC	14	3.3V
15	GND	16	3.3V
17	NC	18	3.3V
19	NC	20	NC
21	GND	22	NC
23	NC	24	NC
25	NC	26	NC
27	GND	28	NC
29	PCIe_RXn	30	NC
31	PCIe_RXp	32	NC
33	GND	34	NC
35	PCIe_TXn	36	NC


Pin No.	Definition	Pin No.	Definition
37	PCIe_TXp	38	DEVSLP
39	GND	40	SMB Clock
41	SATA_RXp	42	SMB DATA
43	SATA_RXn	44	SMB ALERT
45	GND	46	NC
47	SATA_TXn	48	NC
49	SATA_TXp	50	PLT_RST
51	GND	52	CK_REQ
53	CLK_n	54	PCIe_WAKE#
55	CLK_p	56	NC
57	GND	58	NC

Pin No.	Definition	Pin No.	Definition
67	NC	68	SUSCLK
69	M2_SSD_Detect	70	3.3V
71	GND	72	3.3V
73	GND	74	3.3V
75	GND		

Connector PN	Vendor
80159-8521	BELLWETHER



2.2.23 SIM_CARD (SIM Card slot)

23

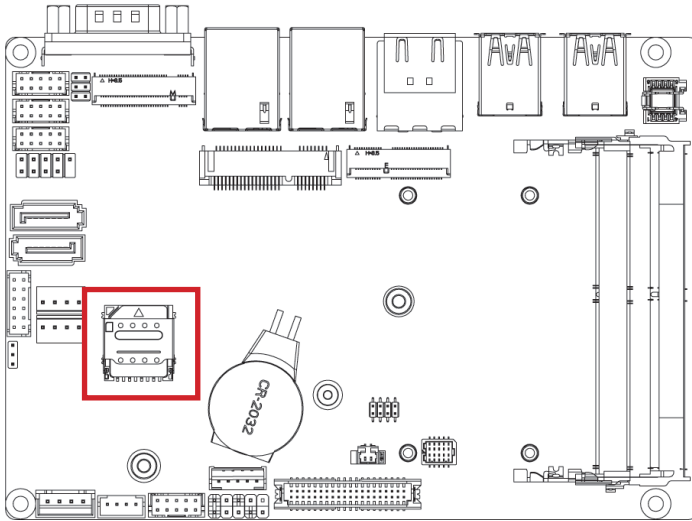

2.2.24 RUSB31_1, RUSB31_2 (USB 3.2 Gen 2x1 connector)

24

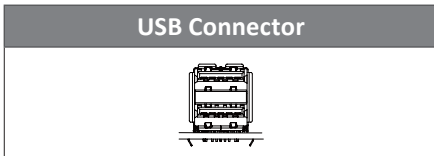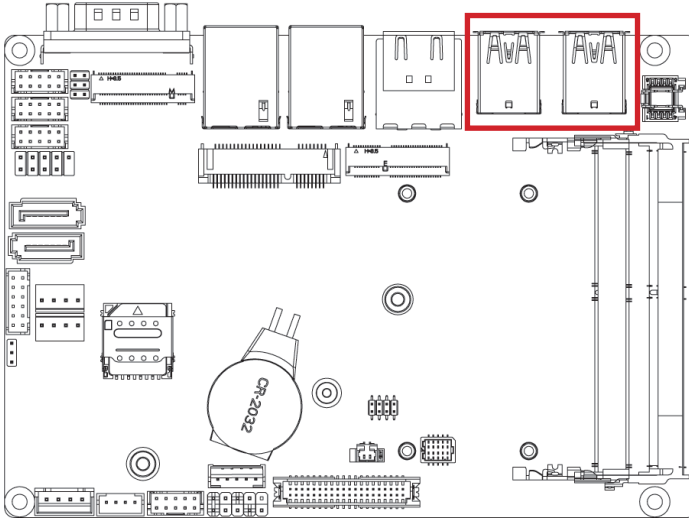


Connector PN	Vendor
UAA111C-841R1-4H	FOXCONN

Pin No.	Definition	Pin No.	Definition
1	5V	10	5V
2	USB_D-	11	USB_D-
3	USB_D+	12	USB_D+
4	GND	13	GND
5	USB3_RX-	14	USB3_RX-
6	USB3_RX+	15	USB3_RX+
7	GND	16	GND
8	USB3_TX-	17	USB3_TX-
9	USB3_TX+	18	USB3_TX+

2.2.25 HDMI21 (HDMI connector)

25

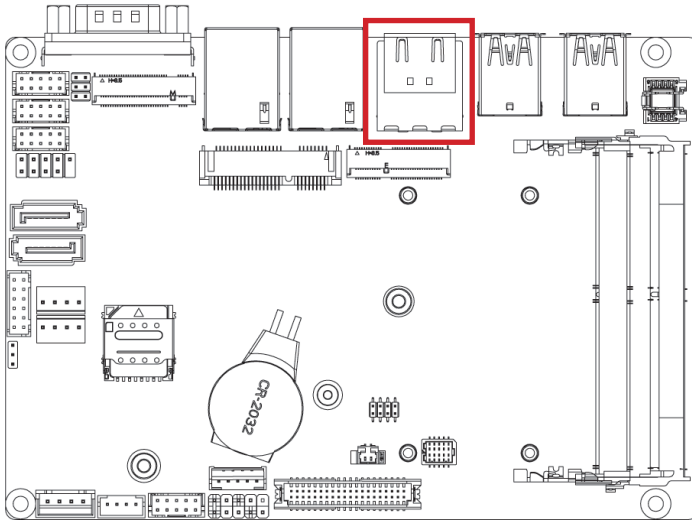

HDMI Connector



Connector PN

QJ11191-DFB1-4F



Vendor

FOXCONN

Pin No.	Definition	Pin No.	Definition
1	HDMI_D2+	13	NC
2	GND	14	NC
3	HDMI_D2-	15	HDMI_SCL
4	HDMI_D1+	16	HDMI_SDA
5	GND	17	GND
6	HDMI_D1-	18	5V
7	HDMI_D0+	19	HDMI_HPD
8	GND		
9	HDMI_D0-		
10	HDMI_CLK+		
11	GND		
12	HDMI_CLK-		

2.2.26 LAN1, LAN2 (LAN connector)

26

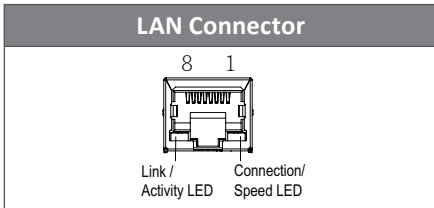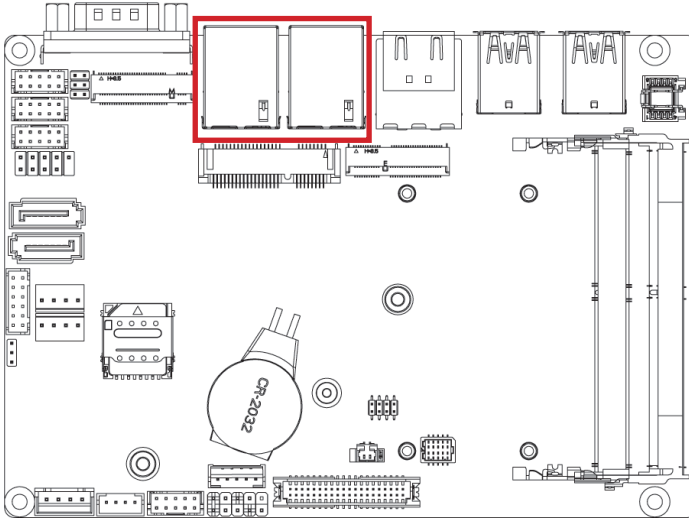

Pin No.	Definition
1	TX1+
2	TX1-
3	TX2+
6	TX2-
4	TX3+
5	TX3-
7	TX4+
8	TX4-

State	Description
Orange On	1Gbps data rate
Green On	100Mbps data rate
Off	10Mbps data rate


Connector PN	Vendor
RB1-13NB5N5A	UDE

2.2.27 COM1 (Serial port connector, RS-232/422/485 & RI/5V/12V)


3.5" SBC Boards

QBIP-8665A/ QBIP-8365A

27

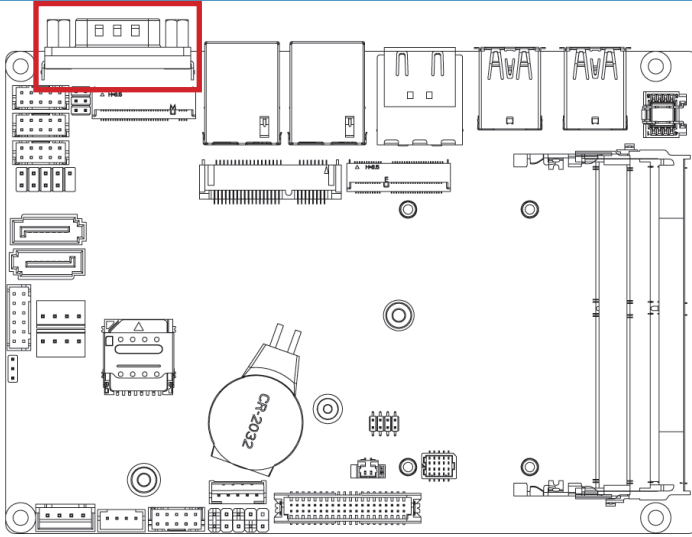

Serial Port Connector



Connector PN	Vendor
SM41D1P1122N33N1	FENYING

Pin No.	RS-232	RS-422 Full Duplex	RS-485 Half Duplex
1	DCD	TXD-	D-
2	RXD	TXD+	D+
3	TXD	RXD+	-
4	DTR	RXD-	-
5	GND		
6	DSR	-	-
7	RTS	-	-
8	CTS	-	-
9	RI	-	-

Chapter 3

Chapter 3 – BIOS

3.1 Introduction

BIOS (Basic input/output system) provides hardware detailed information and boot-up options, which include firmware to control, set-up and test all hardware settings. Therefore, BIOS is the communication bridge between OS/application software and hardware.

3.1.1 How to Entering into BIOS menu


Once the system is power on, press the key as soon as possible to access into BIOS Setup program.

3.1.2 Function Keys to setup in BIOS Setup program

Function keys	Description
→←	Select Screen
↑↓	Select Item
Enter	Execute command or enter the submenu
+	Increase the numeric value or make changes
—	Decrease the numeric value or make changes
F1	General Help
F2	Previous Values
F3	Load Optimized Defaults Settings
F4	Save changes & Exit the BIOS Setup program
ESC	Exit the BIOS Setup program

3.2 The Main Menu


The main menu shows the basic system information. Use arrow keys to move among the items.

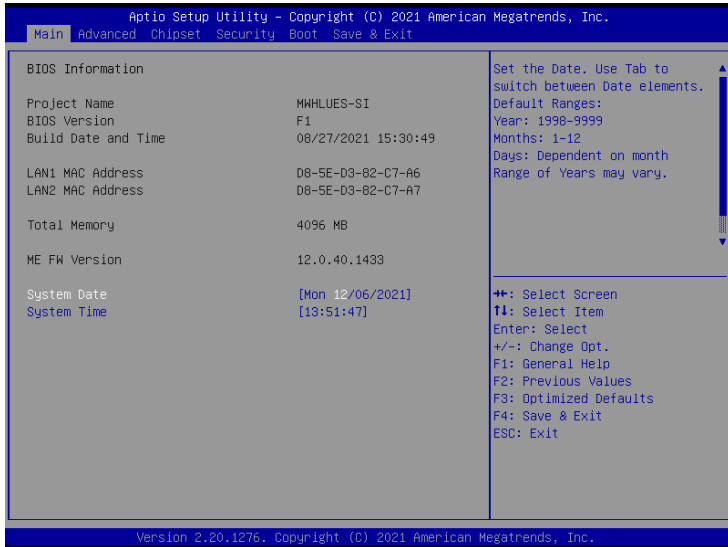

Items	Description
Project Name	Shows Project name information
BIOS Version	Shows the BIOS version of the system
Build Date and Time	Shows the Build Date and Time when the BIOS was created.
LAN1 MAC Address	Shows LAN MAC Address information
LAN2 MAC Address	Shows LAN MAC Address information
Total Memory	Shows the total memory size of the installed memory
ME FW version	Shows ME firmware version
System Date	Set the Date for the system (Format : Weekday - Month - Day - Year)
System Time	Set the time for the system (Format : Hour - Minute - Second)


3.3 Advanced

The Advanced menu is to configure the functions of hardware settings through submenu. Use arrow keys to move among the items, and press <Enter> to access into the related submenu.

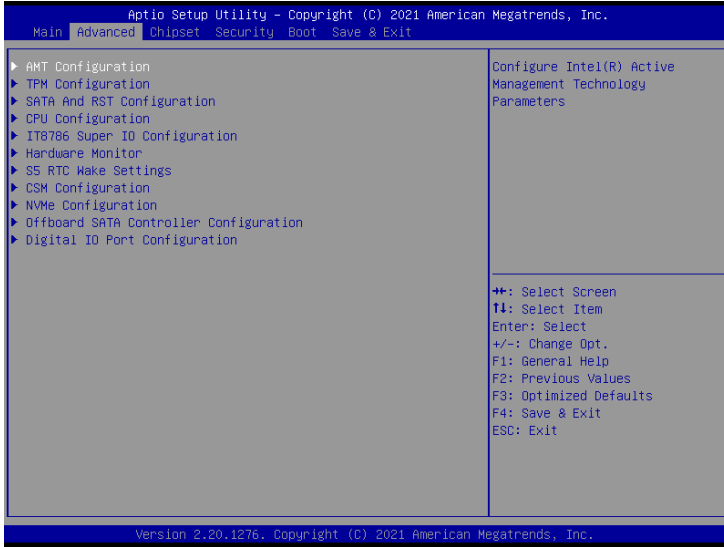


3.3.1 AMT Configuration

USB Provisioning of AMT

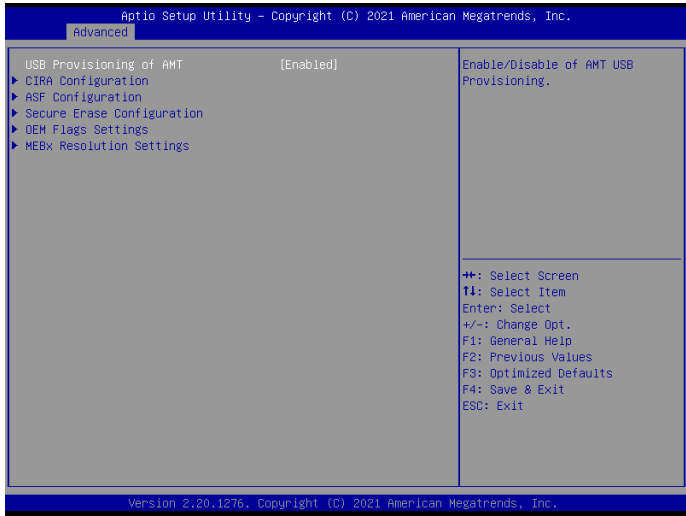


Item	Description
USB Provisioning of AMT	Inserting a specially formatted USB drive into a system, to let the other system remotely control. Disabled : Disables USB Provisioning of AMT Enabled : Enables USB Provisioning of AMT (Default settings)

CIRA Configuration

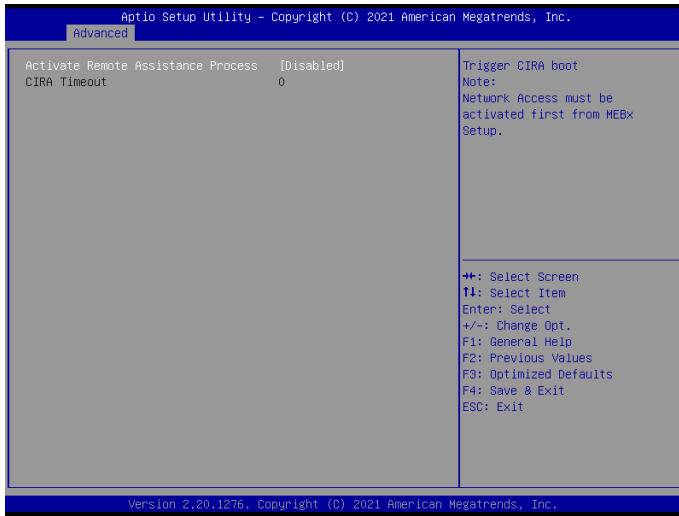


Item	Description
Activate Remote Assistance Process	Trigger CIRA boot Disabled : Disables TPM feature (Default setting) Enabled : Enables TPM feature

ASF Configuration

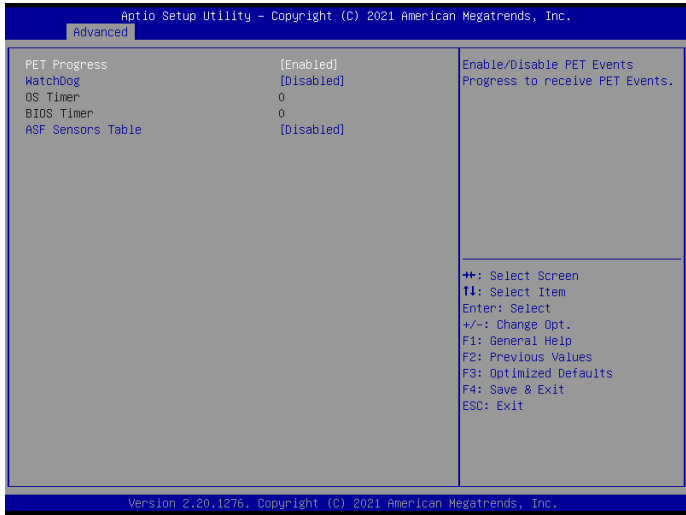

Item	Description
PET Progress	Choose to receive PET events or not Disabled : Disables PET Progress Enabled : Enables PET Progress (Default settings)
WatchDog	Choose to enables watchdog timer or not Disabled : Disables watchdog Timer (Default settings) Enabled : Enables watchdog Timer
OS Timer	Sets OS Watchdog Timer.
BIOS Timer	Sets BIOS Timer.
ASF Sensors Table	Disabled : Disables ASF Sensors Table (Default settings) Enabled : Enables ASF Sensors Table

Secure Erase Configuration

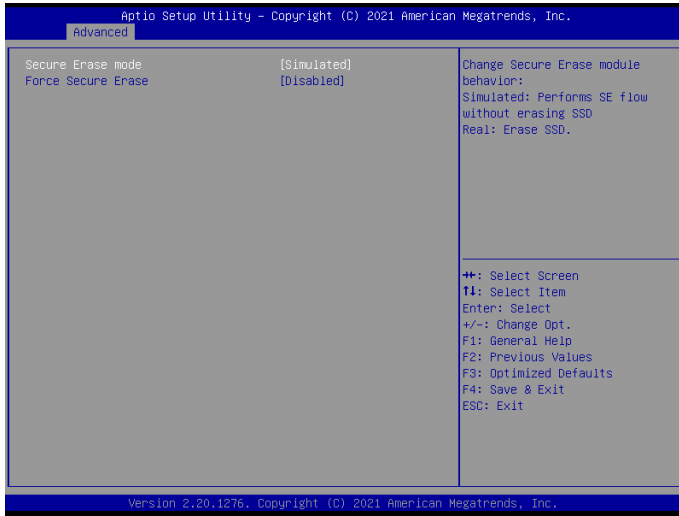


Item	Description
Secure Erase mode	Choose to enables secure erase mode or not. Simulated : Performs SE flow without erasing SSD (Default setting) Real : Erase SSD
Force Secure Erase	Force Secure Erase on next boot. Disabled : Disables Force Secure Erase (Default settings) Enabled : Enables Force Secure Erase

OEM Flags Settings



Item	Description
MEBx hotkey Pressed	Enables or Disables automatic MEBx hotkey press. Disabled : Disables MEBx hotkey Pressed (Default settings) Enabled : Enables MEBx hotkey Pressed
MEBx Selection Screen	Enables or Disables MEBx Selection Screen. Disabled : Disables MEBx Selection Screen (Default settings) Enabled : Enables MEBx Selection Screen
Hide Unconfigure ME Confirmation Prompt	To hide un-configured ME without password confirmation prompt. Disabled : Disables Hide Unconfigure ME Confirmation Prompt (Default settings) Enabled : Enables Hide Unconfigure ME Confirmation Prompt
MEBx OEM Debug Menu Enable	Enables or Disables MEBx debug message. Disabled : Disables MEBx OEM Debug Menu Enable (Default settings) Enabled : Enables MEBx OEM Debug Menu Enable
Unconfigure ME	To Un-configure ME without password. Disabled : Disables Unconfigure ME (Default settings) Enabled : Enables Unconfigure ME


MEBx Resolution Settings

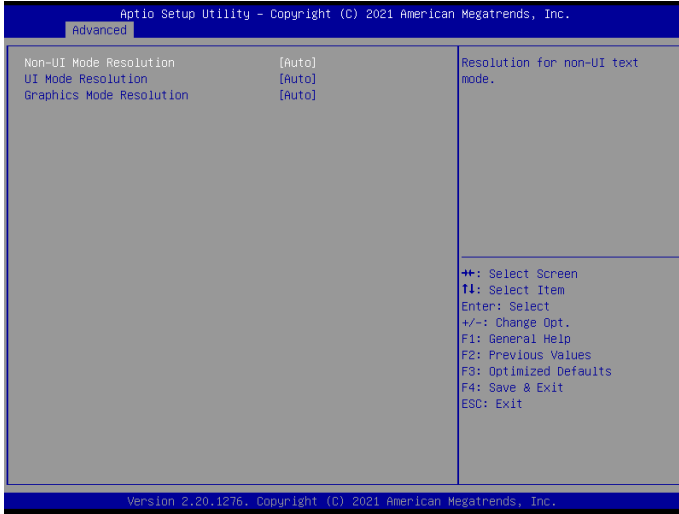

Item	Description
<p>Non-UI Mode Resolution</p>	<p>Resolution for non-UI text mode. Option items : Auto (Default setting), 80x25, 100x31</p>
<p>UI Mode Resolution</p>	<p>Resolution for UI text mode. Option items : Auto (Default setting), 80x25, 100x31</p>
<p>Graphics Mode Resolution</p>	<p>Resolution for graphics mode. Option items : Auto (Default setting), 640x480, 800x600, 1024x768</p>

3.3.2 TPM Configuration

Use TPM Configuration submenu to choose TPM interface.

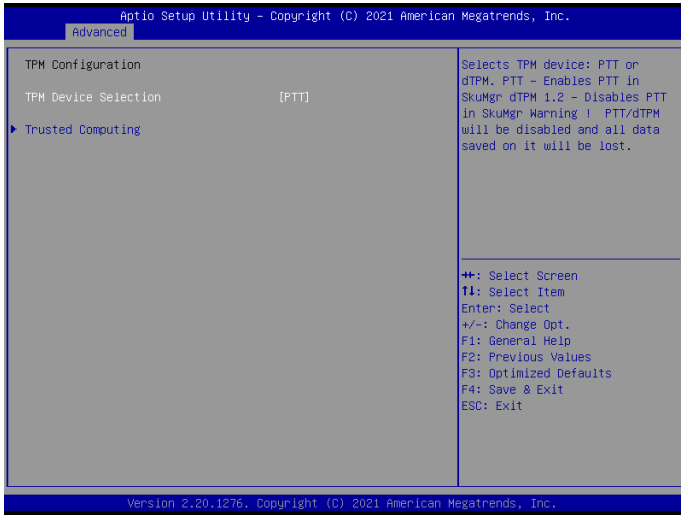


Item	Description
<p>TPM Device Selection</p>	<p>PTT : Internal TPM (Default setting) dTPM : External TPM (When using External TPM module or having TPM chip on MB)</p>

Trusted Computing : Shows TPM information, and TPM module configuration setting.



Item	Description
Security Device support	Enabled : Enables TPM feature (Default setting) Disabled : Disables TPM feature
Item	Description
Pending operation	None : No execution will be conducted (Default setting) TPM clear : Set to clear data on TPM


3.3.2 SATA And RST Configuration

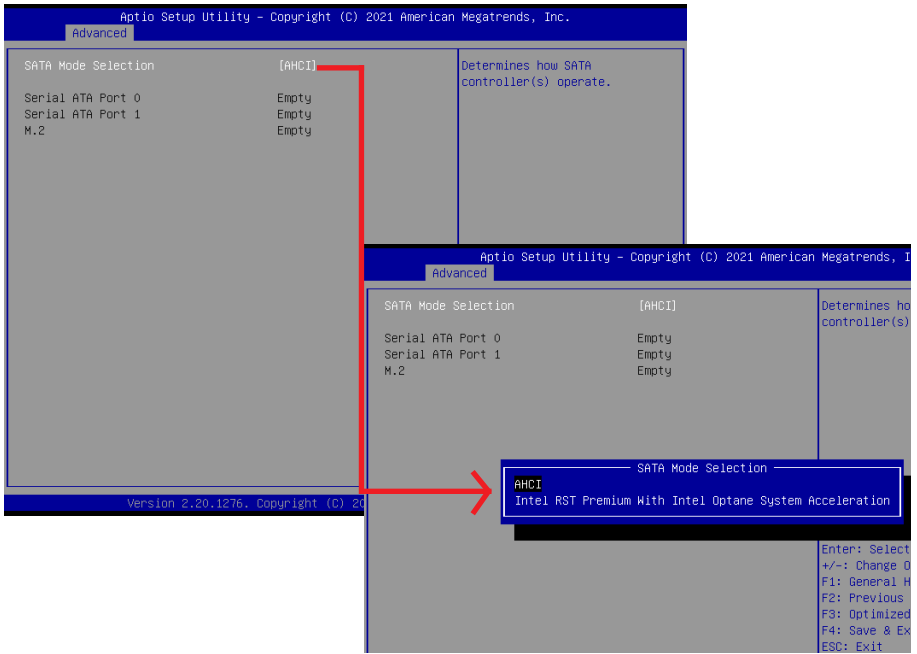

Item	Description
SATA Mode Selection	AHCI : Configures the SATA controllers to AHCI mode. (Default setting) Intel RST Premium With Intel Optane System Acceleration : Enables RAID mode for the SATA controller
Serial ATA Port 0	shows 2.5" SATA HDD/SSD information
Serial ATA Port 1	shows 2.5" SATA HDD/SSD information
M.2	shows M.2 SATA interface SSD information


3.3.3 CPU Configuration

This submenu shows detailed CPU informations.

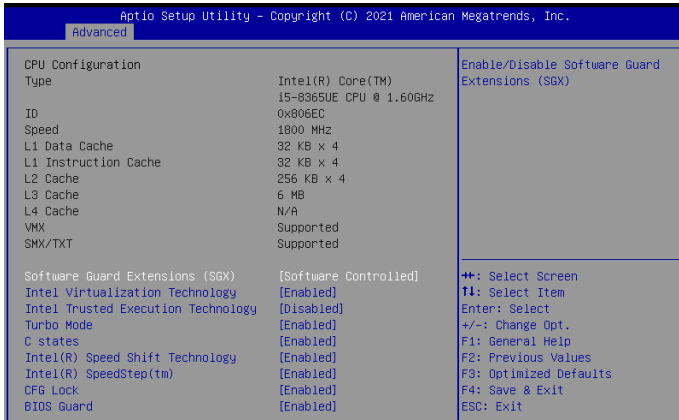


Item	Description
Software Guard Extensions (SGX)	Disabled : Disables Software Guard Extensions (SGX) Enabled : Enables Software Guard Extensions (SGX) Software Controlled : If this item is selected, SGX will be controlled by SGX application for UEFI boot OS (Default setting)
Intel Virtualization Technology	Virtualization enhanced by Intel® Virtualization Technology will allow a platform to run multiple operating systems and applications in independent partitions. With virtualization, one computer system can function as multiple virtual systems. Enabled : Enables Intel Virtualization Technology (Default setting) Disabled : Disables Intel Virtualization Technology
Intel Trusted Execution Technology	To protect the confidentiality and integrity of data from external attacks. Enabled : Enables Intel Trusted Execution Technology Disabled : Disables Intel Trusted Execution Technology (Default setting)
Turbo Mode	Enabled : Enables Turbo Mode (Default setting) Disabled : Disables Turbo Mode
C states	Command CPU to enter into low power consumption mode when CPU is under idle mode. Enabled : Enables C states (Default setting) Disabled : Disables C states
Intel(R) Speed Shift Technology	To speed up CPU frequency transition time from basic frequency to maximum frequency. Enabled : Enables Intel(R) Speed Shift Technology Interrupt control (Default setting) Disabled : Disables Intel(R) Speed Shift Technology Interrupt control
Intel(R) SpeedStep(tm)	According to Intel CPU loading, Intel SpeedStep Technology will automatically adjust the CPU voltage and core frequency to decrease heat and power consumption for power saving. Enabled : Enables Intel SpeedStep Technology (Default setting) Disabled : Disables Intel SpeedStep Technology
CFG Lock	Enabled : Configure MSR 0xE2[15] , CFG Lock bit (Default setting) Disabled : Disables CFG Lock
BIOS Guard	To protect BIOS data from external attacks. Enabled : Enables BIOS Guard (Default setting) Disabled : Disables BIOS Guard

3.3.4 Super I/O Configuration

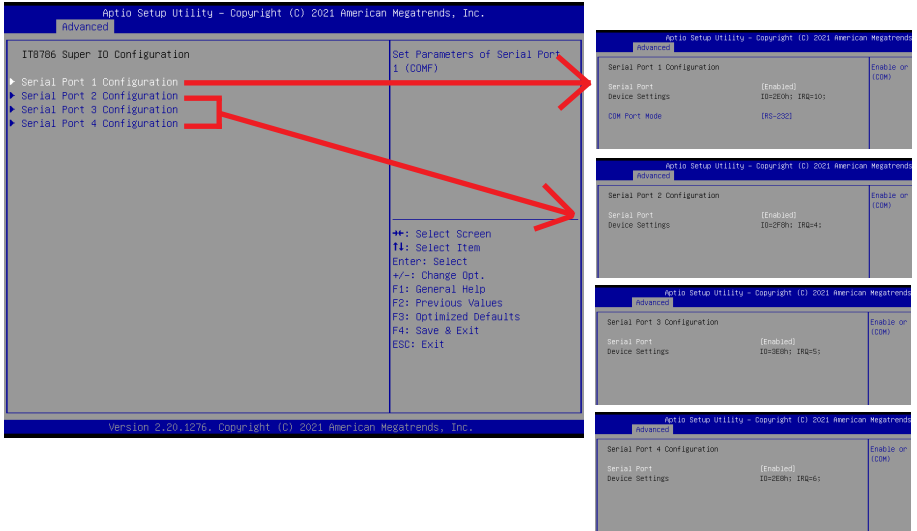


Item	Description
Super IO Chip	Shows Super I/O chip model
Serial Port 1 Configuration	Press [Enter] to configure advanced items : Serial Port : Enabled : Enables allows you to configure the serial port settings Disabled : if Disabled, displays no configuration for the serial port
	Device settings : Display the specified Serial Port base I/O address and IRQ
	COM Port Mode : Choose RS-232, RS-422, or RS-485 feature
	Press [Enter] to configure advanced items :
Serial Port 2 Configuration	Serial Port : Enabled : Enables allows you to configure the serial port settings Disabled : if Disabled, displays no configuration for the serial port
Serial Port 3 Configuration	Device settings : Display the specified Serial Port base I/O address and IRQ
Serial Port 4 Configuration	Device settings : Display the specified Serial Port base I/O address and IRQ

3.3.5 Hardware Monitor

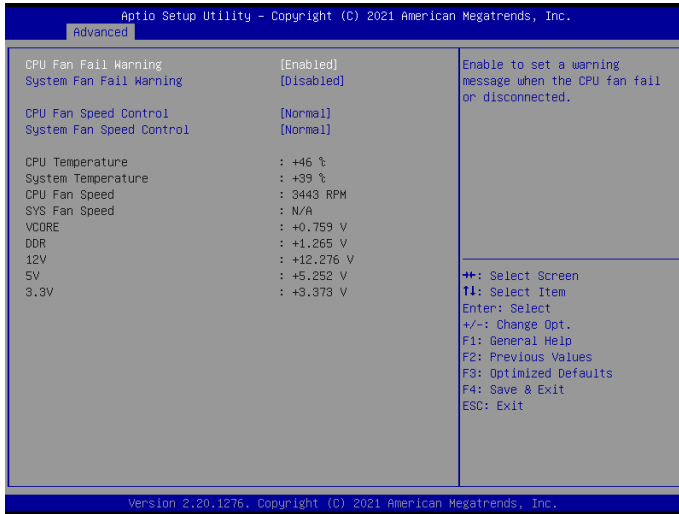

Item	Description
CPU Fan Fail Warning	Enabled : Enables CPU FAN Fail warning alert function (Default setting) Disabled : Disables CPU FAN Fail warning alert function
System Fan Fail Warning	Enabled : Enables to set a warning message when the system fan fail or disconnected. Disabled : Disables to set a warning message when the system fan fail or disconnected. (Default setting)
CPU Fan Speed Control	Normal : Fan speed set by BIOS default (Default setting) Full Speed : Set Fan operates at full speed
System Fan Speed Control	Normal : Fan speed set by BIOS default (Default setting) Full Speed : Set Fan operates at full speed
CPU Temperature	Shows current CPU temperature
System Temperature	Shows current system temperature
CPU Fan Speed	Shows current CPU fan Speed
SYS Fan Speed	Shows current System fan Speed

3.3.6 S5 RTC Wake Settings

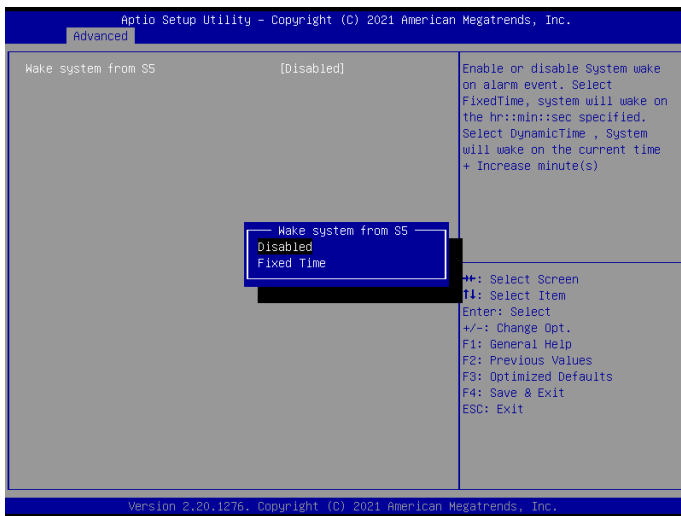

Item	Description
Wake system from S5	Enable or Disable System to wake on a specific time. Disabled : Disables system to wake on a specific time (Default setting) Fixed Time : Enables system to wake on a specific time (Format : hr : min : sec)


3.3.7 CSM Configuration




Item	Description
CSM Support	Choose UEFI or Legacy Mode Disabled : UEFI Mode only (Default setting) Enabled : Enables Legacy Mode feature
Network Stack	When system is power on, install LAN driver under UEFI mode Disabled : Disables UEFI Network Stack (Default setting) Enabled : Enables UEFI Network Stack

3.3.8 NVMe Configuration


NVMe Configuration shows information when your M.2 NVMe PCIe SSD is installed.

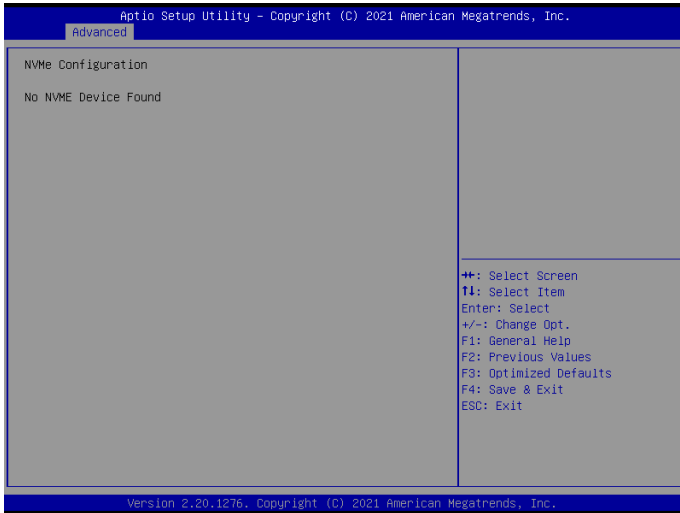

3.3.9 Offboard SATA Controller Configuration

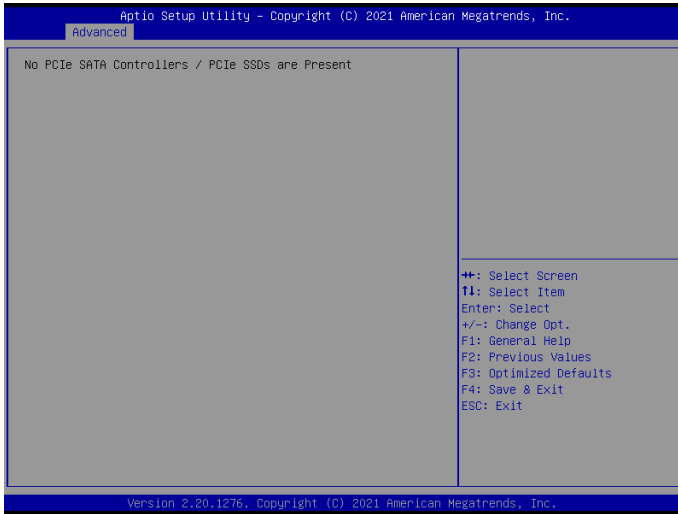


3.3.10 Digital IO Port Configuration

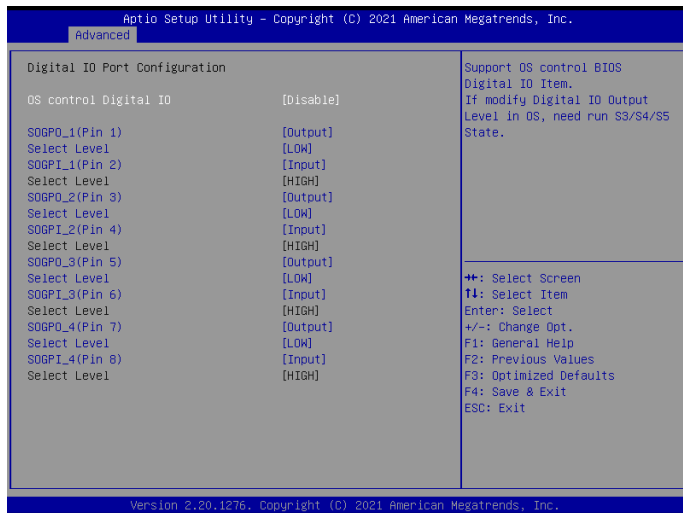


Item	Description
OS control Digital IO	<p>Disabled : If Digital IO Output value/level is modified in OS, they will not be memorized and kept. (Default setting)</p> <p>Enabled : If Digital IO Output value/level is modified in OS, they will be memorized and kept.</p>
SOGPO_1 (Pin 1) SOGPI_1 (Pin 2) SOGPO_2 (Pin 3) SOGPI_2 (Pin 4) SOGPO_3 (Pin 5) SOGPI_3 (Pin 6) SOGPO_4 (Pin 7) SOGPI_4 (Pin 8)	Configure Digital IO Input or Output values for each pin.

3.4 Chipset

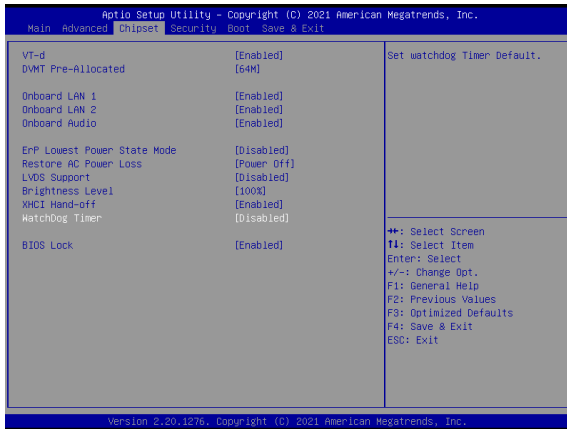


Item	Description
VT-d	Enabled : Enables VT-d function (Default setting) Disabled : Disables VT-d function
DVMT Pre-Allocated	Use DVMT Pre-Allocated to set the amount of system memory which is installed to the integrated graphics processor Option items : 32M , 64M(Default setting)
Onboard LAN1 Onboard LAN2	Enable/Disable onboard LAN controller Enabled : Enables onboard LAN controller (Default setting) Disabled : Disables onboard LAN controller
Onboard Audio	Enable/Disable onboard audio controller Enabled : Enables onboard audio controller (Default setting) Disabled : Disables onboard audio controller
ErP Lowest Power State Mode	Enable/Disable power saving function Enabled : Enables ERP Lowest Power State Mode Disabled : Disabled ERP Lowest Power State Mode (Default setting)
Restore AC Power Loss	To set which option the system should returns if a sudden power loss occurred Power off : Do not power on when the power is back (Default setting) Power on : System power on when the power is back Last state : Restore the system to the state before power loss occurs
LVDS Support	Disabled : Disables LVDS Support (Default setting) Enabled : Enables LVDS Support
Brightness Level	To modified the backlight brightness of the LVDS panel Option items : 10% , 20% , 30% , 40% , 50% , 60% , 70% , 80% , 90% , 100% (Default Setting)
XHCI Hand-off	Enable/Disable XHCI Hand-off function Enabled : Enables XHCI Hand-off function (Default setting) Disabled : Disables XHCI Hand-off function
Watchdog Timer	Enable/Disable Watchdog Timer function Enabled : Enables Watchdog Timer function Disabled : Disabled Watchdog Timer function (Default setting)
BIOS Lock	Enable/Disable BIOS Lock function Enabled : Enables BIOS Lock function (Default setting) Disabled : Disabled BIOS Lock function


3.5 Security

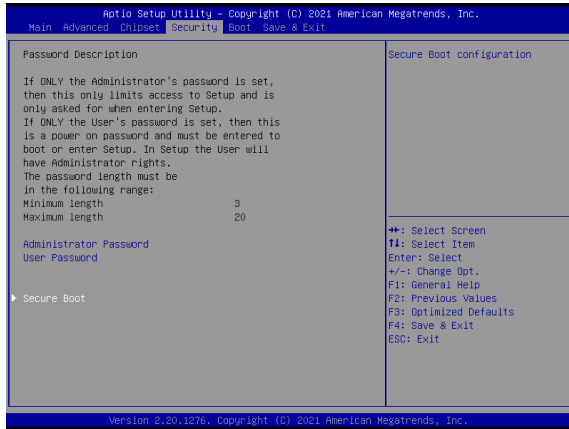

Item	Description
Administrator Password	To set up Administrator's password Minimum length : 3 Maximum length : 20
User Password	To set up User's password Minimum length : 3 Maximum length : 20
Secure Boot	Press <Enter> to configure the advanced items

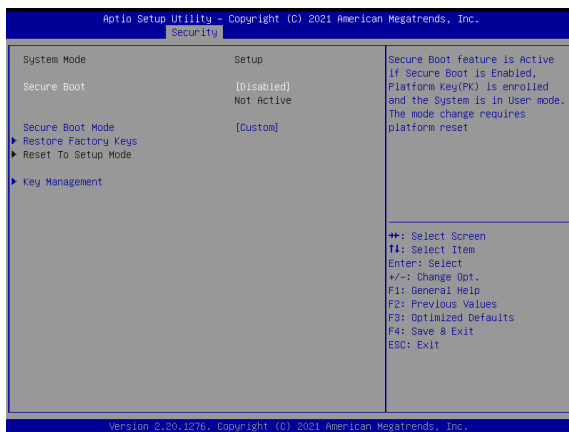

Item	Description
Secure Boot	Secure Boot requires all the applications that are running during the booting process to be pre-signed with valid digital certificates Enabled : Enables Secure Boot function Disabled : Disables Secure Boot function (Default setting)
Secure Boot Mode	Standard : Standard mode Custom : Custom mode (Default setting)
Restore Factory Keys	To restore factory settings Yes : Agree to restore factory settings No : Cancel to restore factory settings
Reset To Setup Mode	Yes : Agree to setup mode No : Cancel to setup mode
Key Management	Enables expert users to modify Secure boot policy variables without full authentication Press <Enter> to configure the advanced items

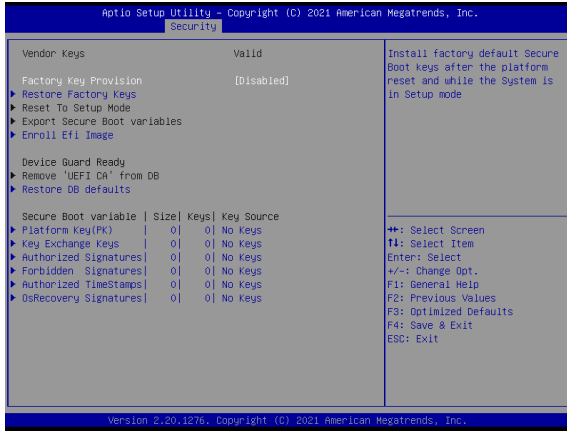

Item	Description	Item	Description
Factory Key Provision	Install factory default Secure Boot keys after the platform reset and while the system is in Setup mode Enabled : Enables Factory Key Provision Disabled : Disables Factory Key Provision (Default setting)	Platform Key (PK)	These items allows you to enroll factory defaults or load Certificates from a file.
Restore Factory Keys	To restore factory settings	Key Exchange Keys	
Reset To Setup Mode	Delete all Secure boot key databases from NVRAM	Authorized Signatures	
Export Secure Boot variables	Copy NVRAM content of Secure Boot variables to files in a root folder on a file system device	Forbidden Signatures	
Enroll Efi Image	Allow the image to run in Secure Boot mode	Authorized TimeStamps	
Remove 'UEFI CA' from DB	To remove 'UEFI CA' from database	OsRecovery Signatures	
Restore DB defaults	Restore DB variables to factory defaults Yes : Agree to restore DB defaults No : Cancel to restore DB defaults		


3.6 Boot

This Boot menu allows you to set/change system boot options



Item	Description
Full Screen LOGO Show	Enable/Disable full screen LOGO show on POST screen Enabled : Enables Full screen LOGO Show on POST screen (Default setting) Disabled : Disables Full screen LOGO Show on POST screen
Boot Option #1	Shows the information of the storage that be installed in the system Choose/set the boot priority

3.7 Save & Exit

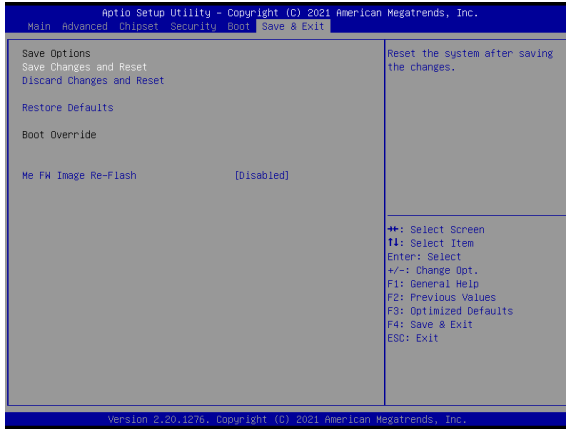

Item	Description
Save Changes and Reset	After configuring all the options that you wish to change, choose this option to save all the changes and reboot the system Yes : Agree to save and reset No : Cancel to save and reset
Discard Changes and Reset	Choose this option to reboot the system without saving any changes Yes : Agree to discard changes and reset No : Cancel to discard changes and reset
Restore Defaults	Restore/Load default values for all the setup options Yes : Agree to load optimized defaults No : Cancel to load optimized defaults
Me FW Image Re-Flahs	Enable/Disable Me FW image re-flash function Enabled : Enables Me FW image re-flash function Disabled : Disables Me FW image re-flash function (Default setting)