


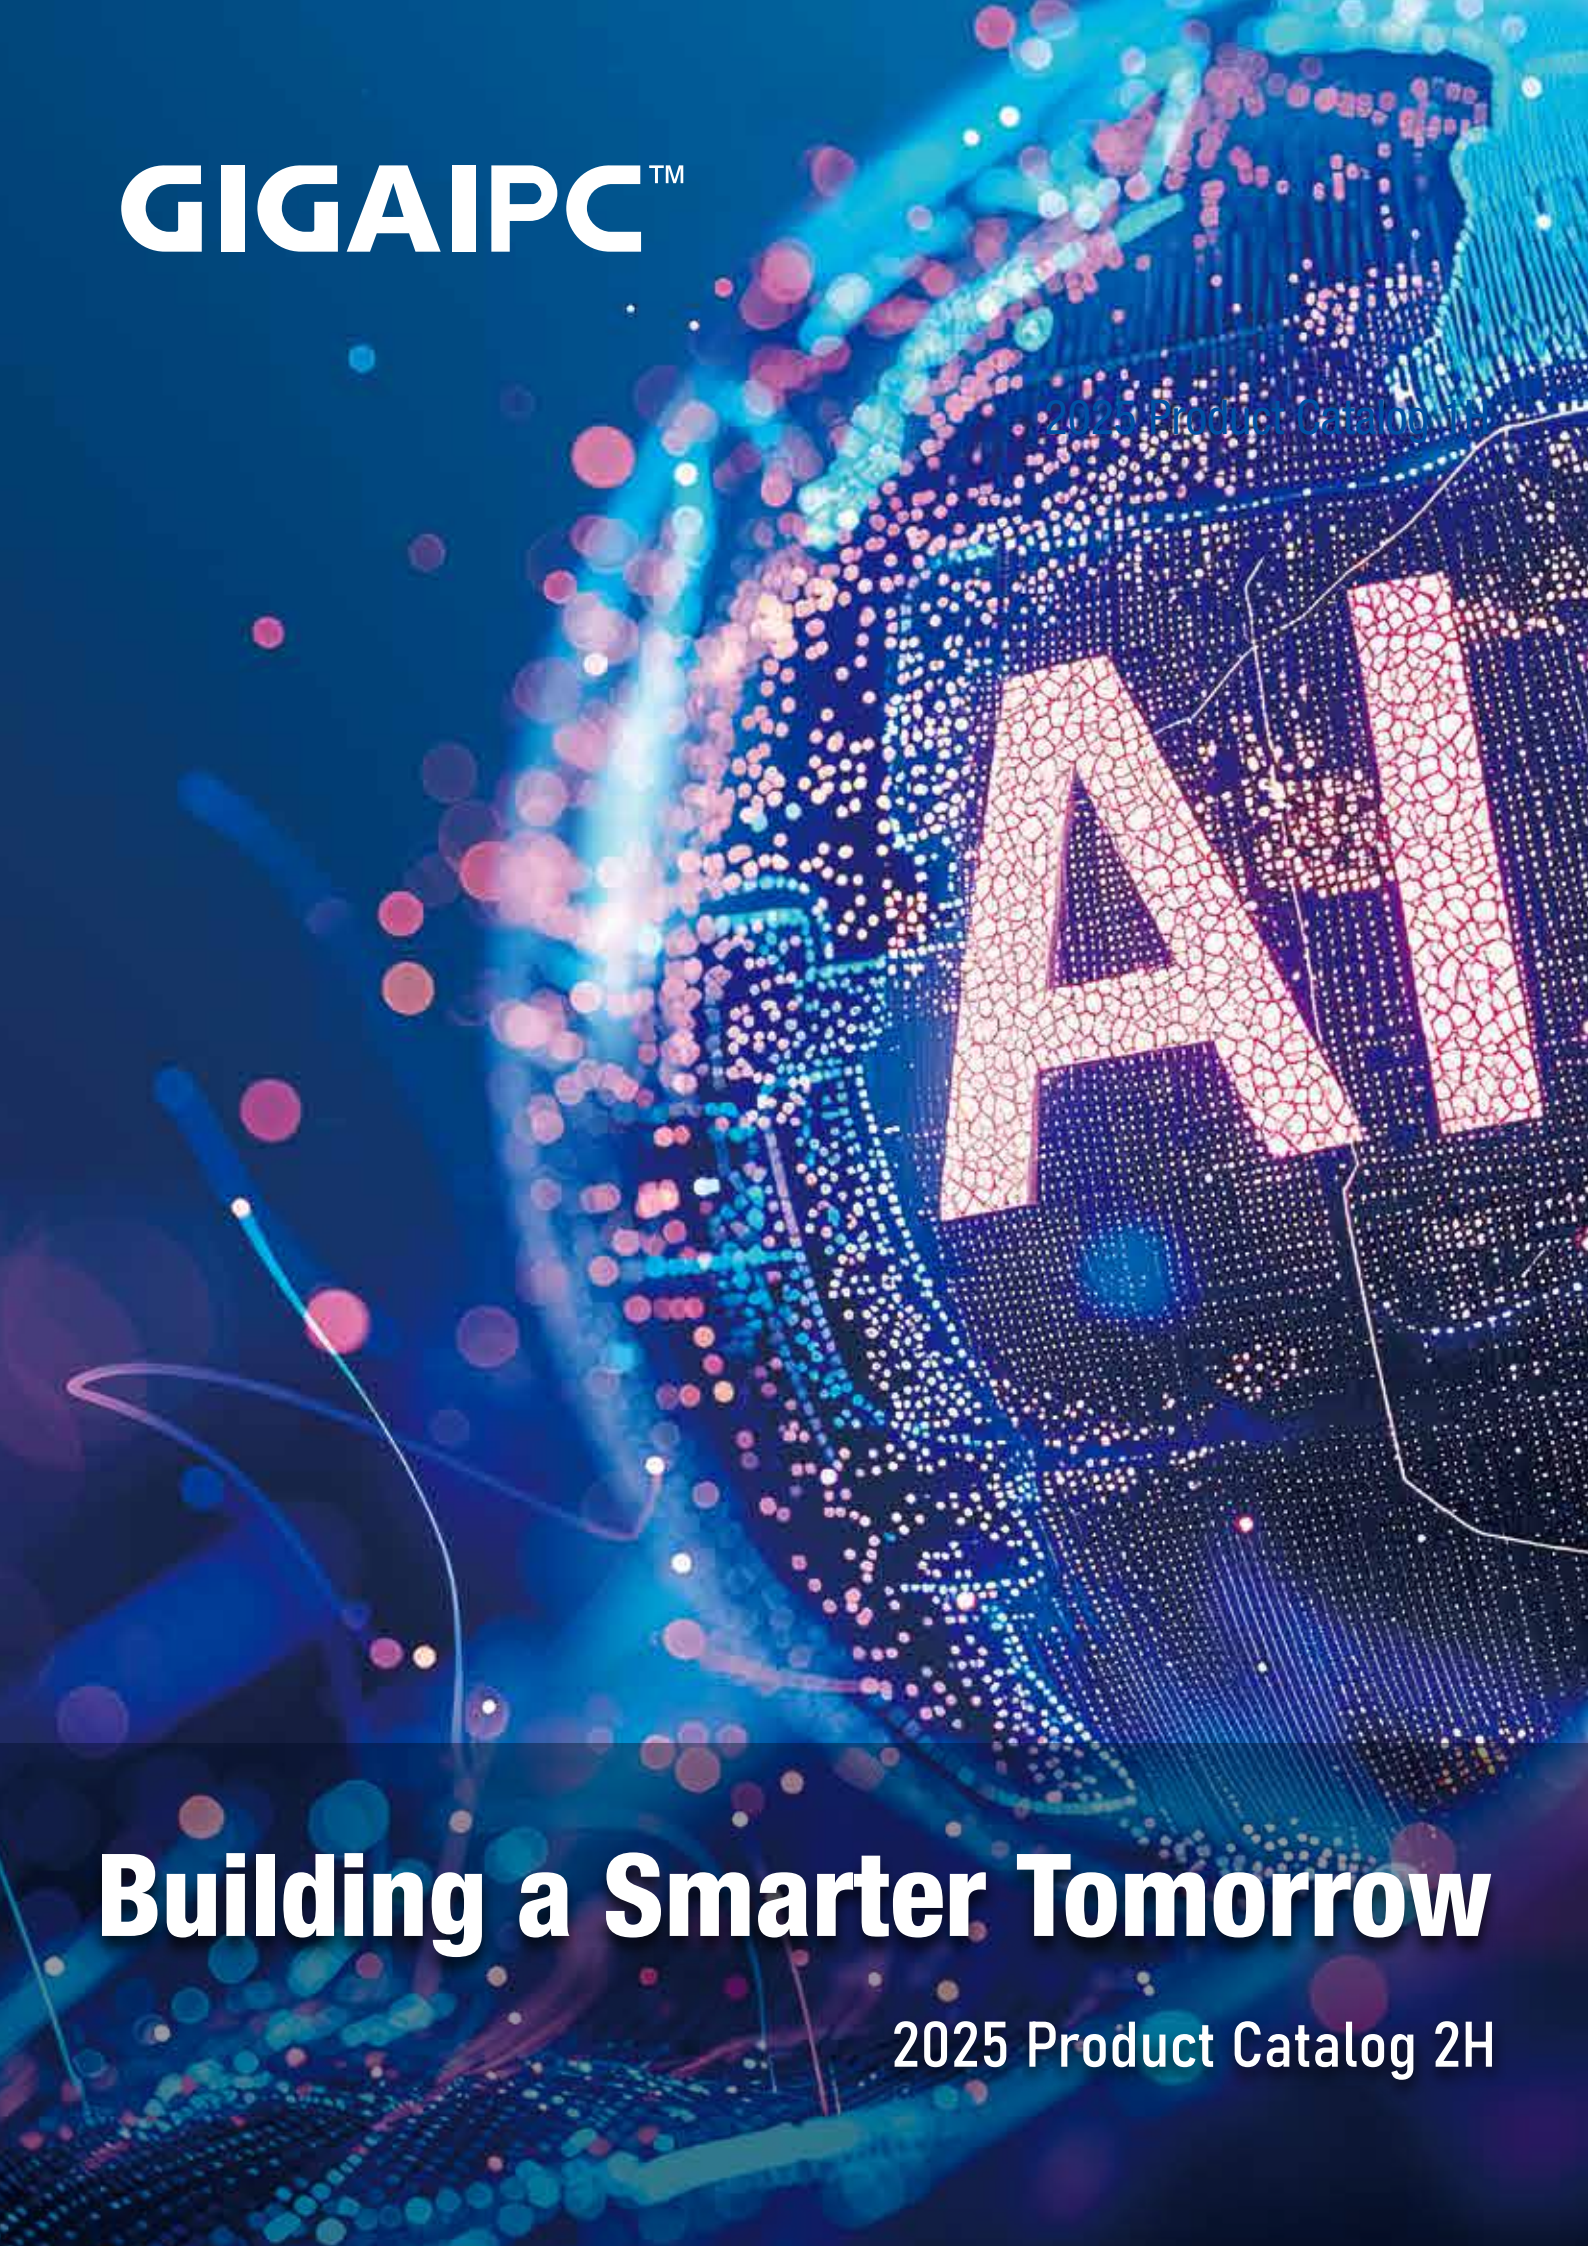

GIGAIPC™

2025 Product Catalog 1H

AI

Building a Smarter Tomorrow

2025 Product Catalog 2H

Company Profile

GIGAIPC™

GIGAIPC, established in 2018 as an independent IPC-focused spin-off from GIGABYTE, is driven by a passion for technology and agile intuition of our customer's requirements. GIGAIPC has an exceptionally sophisticated Research & Development department, enabling us to keep up with the rapid pace of today's technology. Combined with our outstanding research and design ability, GIGAIPC also has an award-winning Taiwan-based manufacturing facility, synchronizing with GIGAIPC's R&D department to deliver high quality and reliable products. GIGAIPC is a young and energetic organization driven by surpassing our customer's expectations, and we promise to offer our customers not only high-quality computing platforms but also world-class service and support. As a result, GIGAIPC's service centers have been established in most major cities worldwide, and our global presence is still being actively expanding, all ready to offer the best service to our customers.

GIGAIPC™
GIGABYTE™
GROUP


GIGAIPC is an Associate member of the Intel® Internet of Things Solutions Alliance.




“Building a SMARTER Tomorrow”

The strengths of GIGAIPC are based on the advantages, skills and expertise we have built to realize this vision, including being customer focused and striving for high quality. GIGAIPC is determined to keep reinforcing these strengths as our principles to achieve maximum customer satisfaction.


Key Advantages to work with GIGAIPC

Technology	1. Intel®, AMD etc. Key vendor direct support 2. Latest technical and over 10 years RD development experiences 3. Large coverage rate of design verification
Flexibility	1. Huge off-the-shelf products combination and rich ODM/OEM experiences 2. Multiple manufacturing sites for different high-mix and low-volume requirements 3. Task-force team with multiple functions to align customer's requirements
Quality	1. Component IPC, audit and approval system 2. Rich resources and equipments on design and manufacture quality system 3. Emphasizing closed-loop of PDCA cycle for continuous improvement
Service	1. Worldwide RMA service coverage more than 80 service centers globally
Capability	1. Customization capability 2. Direct field application engineer support and quick response 3. Customized manufacturing process, quality control and delivery solutions


Motherboard's Naming Rule -

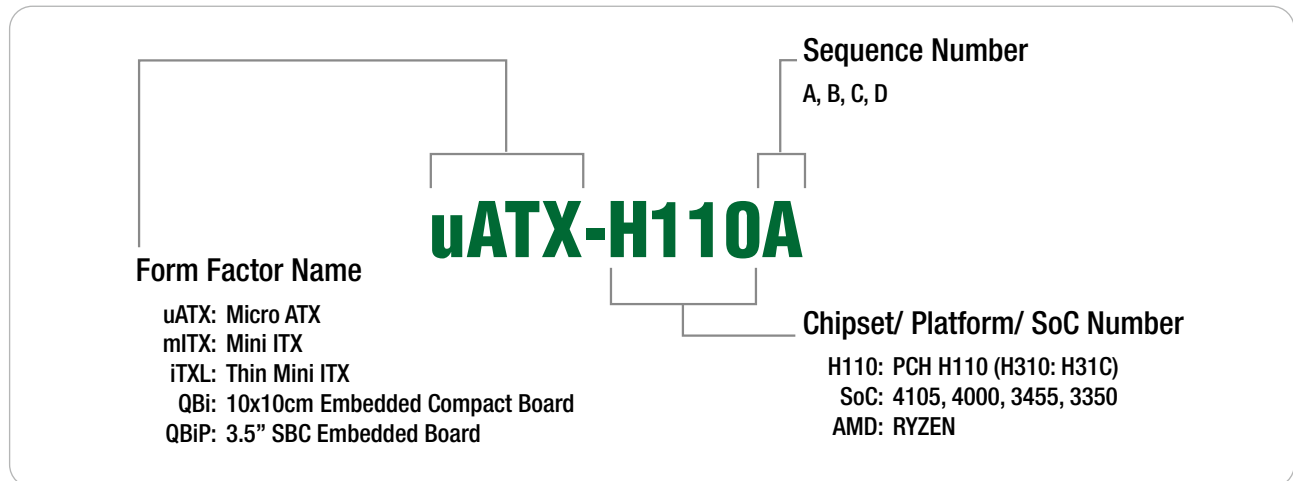

System's Naming Rule -

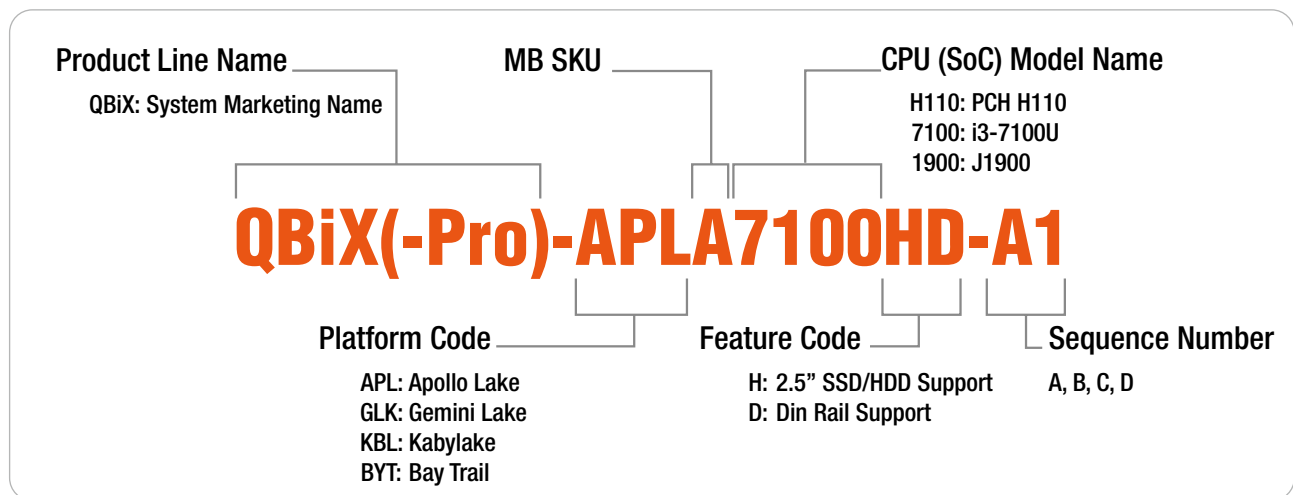

Motherboard's Form Factor -

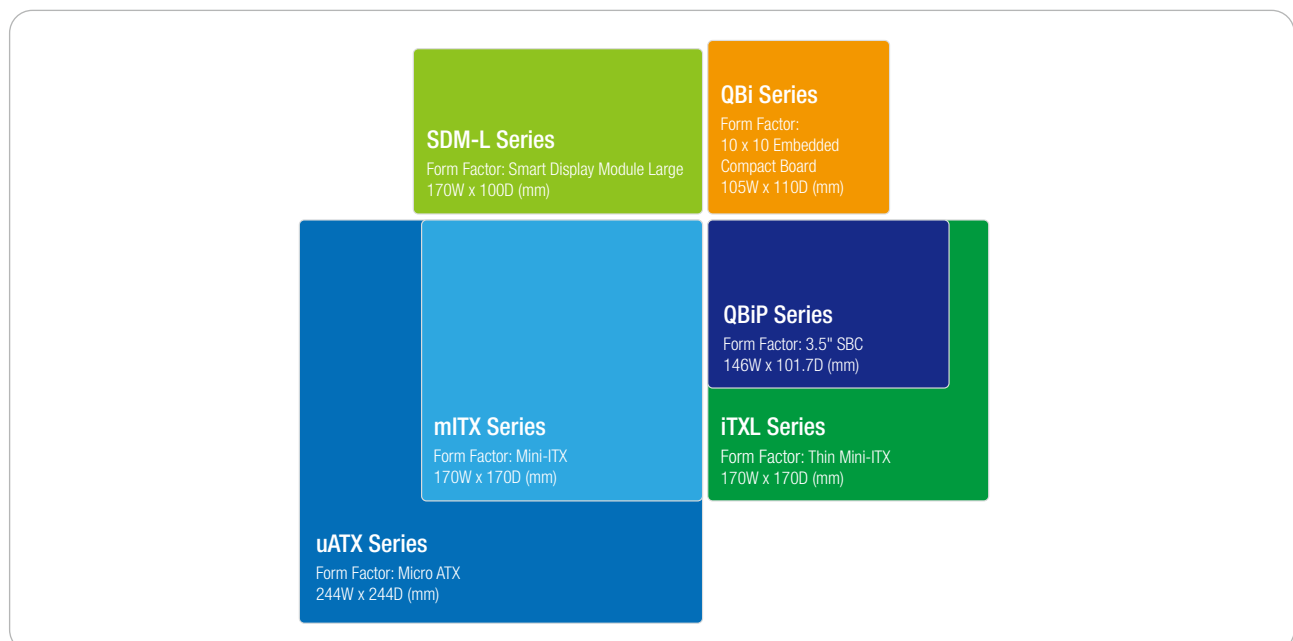

Company Profile	1	QBiX-Pro-ADLA1215EH-A2.....	12
Product's Naming Rule	2	QBiX-Pro-TGLA1135G7H-A1.....	13
Index	3	QBiX-Pro-TGLA1115G4EH-A1.....	13
Embedded Computing Systems.....	7	QBiX-Pro-TGLA1135G7H-A2.....	13
QBiX Series	7	QBiX-Pro-TGLA1115G4EH-A2.....	13
QBiX-RPLA1355H-A1.....	7	QBiX-Pro-WHLA8145H-A1	14
QBiX-RPLA1335H-A1.....	7	QBiX-Pro-WHLA8145H-A2.....	14
QBiX-RPLA1315EH-A1.....	7	QBiX-Pro-KBLB7200H-A2	15
QBiX-TGLA1135G7-A1.....	7	QBiX-Pro-KBLB7100H-A1.....	15
QBiX-TGLA1115G4E-A1.....	7	QBiX-Pro-KBLB3965H-A1.....	15
QBiX-WHLA8145H-A1.....	7	QBiX-Pro-AMLA7433REH-A1.....	16
QB-N150A.....	8	QBiX-Pro-AMLA7433REH-A2.....	16
QBiX-ADNAN97-A1	8	QBiX-Pro-ADNAN97H-A1	17
QBiX-EHLA6412-A1	8	QBiX-Pro-ADNAN97H-A2	17
QBiX-EHLB6412-A1.....	9	QBiX-Pro-EHLA6412H-A1	18
QBiX-GLKB4125-A1	9	QBiX-Pro-EHLA6412H-A2	18
QBiX-Pro Series	10	QBiX-Pro-APLB4200H-A1	19
QBiX-Pro-MTLA155H-A1	10	QBiX-Pro-APLB4200H-B1.....	19
QBiX-Pro-MTLA125H-A1	10	QBiX-Pro-BYTA1900H-A1	19
QBiX-Pro-MTLA155H-A2	10	QBiX-Pro-AMDA2314H-A1	20
QBiX-Pro-MTLA125H-A2	10	QBiX-Pro-AMDA2314H-A2	20
QBiX-Pro-RPLA1355H-A1	11	QBiX-DIN Rail Series	21
QBiX-Pro-RPLA1335H-A1	11	QBiX-DR-AMLA7433REH-A1.....	21
QBiX-Pro-RPLA1315EH-A1.....	11	QBiX-DR-EHLA6412H-A1	21
QBiX-Pro-RPLA1355H-A2	11	QBiX-Expert Series	22
QBiX-Pro-RPLA1335H-A2	11	QBiX-Expert-RPLA1340PH-A1.....	22
QBiX-Pro-RPLA1315EH-A2	11	QBiX-Expert-RPLA1320PEH-A1	22
QBiX-Pro-ADLA1255H-A1.....	12	QBiX-Expert-TGLA1165G7H-A1.....	23
QBiX-Pro-ADLA1235H-A1.....	12	QBiX-Expert-TGLA1135G7H-A1.....	23
QBiX-Pro-ADLA1215EH-A1.....	12	QBiX-Expert-TGLA1115G4EH-A1	23
QBiX-Pro-ADLA1255H-A2.....	12	QBiX-ITX Series.....	24
QBiX-Pro-ADLA1235H-A2.....	12	QBiX-ITX-Chassis Kit	24

QBiX-Jumbo Series	25	QBiX-Lite Series	35
QBiX-JMB-ADLA67EH-B1	25	QBiX-Lite-RPLA1360PH-A1	35
QBiX-JMB-ADLA67EHD-B1	25	QBiX-Lite-RPLA1340PH-A1	35
QBiX-JMB-ADLA67EH-A1	26	QBiX-Lite-TGLA1145G7E-A1	35
QBiX-JMB-ADLA67EHG-A1	26	QBiX-Lite-TGLA1135G7-A1	36
QBiX-JMB-ADLA67EHG-B1	26	QBiX-Lite-AMDA2314H-A1	36
QBiX-JMB-CMLA47EH-A1	27	QBiX-Lite SDM Kits	37
QBiX-JMB-CMLA47EHG-A1	27	SDM-L Series	38
QBiX-JMB-CMLA47EHG-B1	28	SDM-1345EAL	38
QBiX-JMB-CMLA47EHGP-A1	28	SDM-1335AL	39
QBiX-JMB-CFLA310H-A1	29	SDM-1315AL	39
QBiX-JMB-CFLA310HG-A1	29	SDM-1185G7EL	39
QBiX-JMB-CFLA310HG-B1	29	SDM-1165G7L	40
QBiX-WP Series	30	SDM-1135G7L	40
QBiX-WP-ADLA1235UH-A1	30	SDM-1115G4L	40
QBiX-WP-WHLA8265H-A1	30	SDM Docking Board Series.....	41
QBiX-WP-APLA3940H-A1	30	CIBPU	41
QBiX-Jetson Series	31	CIBPX	41
QN-ORAX64-A1	31	OPS Series	42
QN-ORAX32-A1	31	OPS-H610B	42
QN-ORNX16GH-A1	31	Embedded Boards	43
QN-ORNX16	32	ATX Series	43
QBiX-Jetson-XavierAHP-A1	32	ATX-Q870A	43
QBiX-Jetson-NanoAHP-A1	32	ATX-Q670B	44
QBiX-Plus Series	33	ATX-Q670A	44
QS-N150A	33	Micro-ATX Series	45
QBiX-Plus-EHLA6412-A1	33	uATX-Q870A	45
QBiX-Mini Series.....	34	uATX-Q670B	46
QM-G700A	34	uATX-H610B	46
QM-7433REA-A1	34	uATX-Q670A	47

uATX-H610A.....	47	QBiP-1360A/ QBiP-1340A.....	60
uATX-W48EA	48	QBiP-1365EB/ QBiP-1335EB.....	60
uATX-Q47EA	48	QBiP-1355B/ QBiP-1335B/ QBiP-1315EB	61
uATX-H410A.....	48	QBiP-1245EB	61
Mini-ITX Series	49	QBiP-1255A/ QBiP-1235A/ QBiP-1215EA	62
mITX-Q870A	49	QBiP-1185G7EB/ QBiP-1145G7EB	62
mITX-H810A.....	49	QBiP-1165G7A/ QBiP-1135G7A/ QBiP-1115G4EA	62
mITX-H810E.....	49	QBiP-1165G7B/ QBiP-1135G7B/ QBiP-1115G4EB	63
mITX-Q670A	50	QBiP-8665A/ QBiP-8365A	63
mITX-H610A.....	50	QBiP-8145A.....	63
mITX-Q67EB.....	50	QBiP-7600A/ QBiP-7200A/ QBiP-7100A.....	64
mITX-H61EC.....	51	QBiP-3965A.....	64
mITX-H610E	51	QBiP-x7433REA.....	65
mITX-Q47EA	52	QBiP-N150A.....	65
mITX-H42EA.....	52	QBiP-N97A	65
mITX-Q370A	52	QBiP-x6413EA.....	66
mITX-H310A.....	53	QBiP-6412A/ QBiP-6210A	66
mITX-6412A.....	53	QBiP-4200B/ QBiP-4200C/ QBiP-3350A.....	67
mITX-4125A	54	QBiP-4200D/ QBiP-4200E/ QBiP-3350B.....	67
mITX-2748A	54	QBiP-E3940A	68
Thin Mini-ITX Series	55	QBiP-E3940B	68
iTXL-H810A.....	55	QBiP-1900A.....	68
iTXL-H610A.....	55	QBiP-2314A.....	69
iTXL-Q47EA	56	QBiP Wide Temperature Series.....	70
iTXL-H42EA.....	56	QBiP-1365EBT/ QBiP-1335EBT	70
iTXL-1135G7A/ iTXL-1115G4EA.....	57	QBiP-1185G7EBT/ QBiP-1145G7EBT	70
iTXL-N97A.....	57	QBiP-1115G4EBT	70
iTXL-6412A/ iTXL-6210A	58	QBiP-x7433REAT	71
QBiP Series (3.5" SBC)	59	QBiP-x6413EAT	71
QBiP-255UB/ QBiP-225UB	59	QBiP-E3940AT	72
QBiP-155UB/ QBiP-125UB	59	QBiP-E3940BT	72

QBi Series (10 x 10 Embedded Compact Board) 73

QBi-1355A/ QBi-1335A/ QBi-1315EA..... 73

QBi-1165G7A/ QBi-1135G7A/ QBi-1115G4EA..... 73

QBi-8665A/ QBi-8365A 74

QBi-8145A..... 74

QBi-N150A 75

QBi-N97A 75

QBi-N97B 75

QBi-6412A/ QBi-6210A..... 76

QBi-6412B..... 76

QBi-4125A..... 76

Pico-ITX Series..... 77

PICO-G700 77

PICO-x7433REA..... 77

PICO-N150A..... 78

PICO-N97A 78

PICO-G350A..... 78

PICO-G350B..... 78

Pico-ITX Wide Temperature Series..... 79

PICO-x7433REAT 79

QBiX Series



Model Name	QBiX-RPLA1355H-A1 QBiX-RPLA1335H-A1 QBiX-RPLA1315EH-A1	QBiX-TGLA1135G7-A1 QBiX-TGLA1115G4E-A1	QBiX-WHLA8145H-A1
Dimension	138W x 118D x 74.2H (mm)	138W x 118D x 74.2H (mm)	138W x 118D x 74.2H (mm)
CPU	Intel® Core™ i7-1355U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 5.0 GHz Intel® Core™ i5-1335U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.6 GHz Intel® Core™ i3-1315UE Processor Intel® 7, 6 cores, 2P+8E, 8 threads, up to 4.5 GHz	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.90 GHz	Intel® Core™ i3-8145UE Processor 14nm, 2 cores, 4 threads, up to 3.9 GHz
Chipset	SoC	SoC	SoC
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz
Ethernet	1 x GbE LAN Port (Realtek® RTL8111H) 1 x 2.5GbE LAN Port (Intel® I226V)	2 x GbE LAN Ports (Intel® I219V and Realtek® RTL8111HS)	2 x GbE LAN Ports (Intel® I219V and Realtek® RTL8111HS)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe Graphics eligible/ UHD Graphics for 13th Gen Intel® Processors: 2 x HDMI 2.0, 1 x DP 1.4 through USB Type C (DP Alt. mode) 3 independent display outputs	Integrated Graphics Processor - Intel® Iris® X® Graphics: 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 620: 2 x HDMI 1.4 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	—	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Vertical USB 3.2 Gen 1
Front I/O	2 x USB 3.2 Gen 2x1 1 x USB 3.2 Type C with DP 1.4b (DP Alt. mode) 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/845) 1 x Combo Audio Jack (Headphone & Headset)	2 x USB 3.2 Gen 2x1 1 x Power button with LED 2 x External Antenna Holes (Optional) 1 x HDD LED 1 x COM Port (RS-232/422/845) 1 x Headphone Jack	2 x USB 3.2 Gen 2x1 1 x Power button with LED 2 x External Antenna Holes (Optional) 1 x HDD LED 1 x COM Port (RS-232/422/845) 1 x Headphone Jack
Rear I/O	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack 2 x External Antenna Holes (Optional)	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw Type DC Jack
Side I/O	—	—	—
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0	—	—
Power	+12V~24VDC (Adapter 19.5V/135W)	+9V~48VDC (Adapter 19.5V/135W)	+9V~36VDC (Adapter 19V/90W)
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Mounting	Wall mount	Wall mount	Wall mount
Ordering Information	6BQB1355AMR-SI (Box packing) 6BQB1335AMR-SI (Box packing) 6BQB1315AMR-SI (Box packing)	6BQB1135AMR-SI (Box packing) 6BQB1115AMR-SI (Box packing)	6BQB8145AMR-SI (Box packing)
Built-in Components	—	—	—

QBiX Series

Preliminary



Model Name	QB-N150A	QBiX-ADNAN97-A1	QBiX-EHLA6412-A1
Dimension	118W x 109.4D x 44.4H (mm)	118W x 109.4D x 44.4H (mm)	118W x 109.4D x 44.4H (mm)
CPU	Intel® Processor N150 Intel® 7, 4 cores, up to 3.6 GHz	Intel® Processor N97 Intel® 7, 4 cores, up to 3.6 GHz	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz
Chipset	SoC	SoC	SoC
Memory	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Single Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics : 2 x HDMI 2.0 1 x DP 1.4 through USB Type C (DP Alt. mode) 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors : 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	—	—	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen 3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Front I/O	2 x USB 3.2 Gen 2x1 1 x COM Port (RS-232) 1 x Combo Audio Jack (Headphone & Headset) 1 x Power button with LED 1 x USB Type C	2 x USB 3.2 Gen 2x1 1 x COM Port (RS-232) 1 x Combo Audio Jack (Headphone & Headset) 1 x Power button with LED	2 x USB 3.2 Gen 2x1 1 x COM Port (RS-232) 1 x Combo Audio Jack (Headphone & Headset) 1 x Power button with LED
Rear I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x HDMI 2 x External Antenna Holes (Optional) 1 x Screw Type DC Jack	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x HDMI 2 x External Antenna Holes (Optional) 1 x Screw Type DC Jack	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x HDMI 2 x External Antenna Holes (Optional) 1 x Screw Type DC Jack
Side I/O	—	—	—
TPM	Onboard TPM 2.0 security chip NUVOTON NPCT760AABYX	Onboard TPM 2.0 security chip NUVOTON NPCT760AABYX	—
Power	+12V~19VDC (Adapter 19V/65W)	+12V~19VDC (Adapter 19V/65W)	+12V~19VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Mounting	VESA 75/100	VESA 75/100	VESA 75/100
Ordering Information	6BQBN150AMR-SI (Box packing)	6BQBN970AMR-SI (Box packing)	6BQB6412AMR-SI (Box packing)
Built-in Components	—	—	—

QBiX Series



Model Name	QBiX-EHLB6412-A1	QBiX-GLKB4125-A1
Dimension	118W x 109.4D x 44.4H (mm)	118W x 109.4D x 44.4H (mm)
CPU	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz	Intel® Celeron® J4125 Processor 14nm, 4 cores, 4 threads, up to 2.7 GHz
Chipset	SoC	SoC
Memory	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Single Channel DDR4 3200 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 8 GB, Support Single Channel DDR4 2400 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Intel® I211AT and Realtek® RTL8111HS)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 600: 2 x HDMI 1.4 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	—	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Front I/O	2 x USB 3.2 Gen 2x1 1 x COM Port (RS-232) 1 x Combo Audio Jack (Headphone & Headset) 1 x Power button with LED	2 x USB 3.2 Gen 1 1 x COM Port (RS-232) 1 x Headphone Jack 1 x Power button with LED
Rear I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x HDMI 2 x External Antenna Holes (Optional) 1 x Screw Type DC Jack	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x HDMI 2 x External Antenna Holes (Optional) 1 x Screw Type DC Jack
Side I/O	—	—
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	—
Power	+12V~19VDC (Adapter 19V/65W)	+12V~19VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	VESA 75/100	VESA 75/100
Ordering Information	6BQB6412BMR-SI (Box packing)	6BQB4125AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series

Preliminary



Preliminary



Model Name	QBiX-Pro-MTLA155H-A1 QBiX-Pro-MTLA125H-A1	QBiX-Pro-MTLA155H-A2 QBiX-Pro-MTLA125H-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Core™ Ultra 7 Processor 155U Intel® 4, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.8 GHz Intel® Core™ Ultra 5 Processor 125U Intel® 4, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.3 GHz	Intel® Core™ Ultra 7 Processor 155U Intel® 4, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.8 GHz Intel® Core™ Ultra 5 Processor 125U Intel® 4, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.3 GHz
Chipset	SoC	SoC
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 96 GB Support Dual Channel DDR5 5600 MHz memory modules	2 x DDR5 SO-DIMM sockets, Max. Capacity 96 GB Support Dual Channel DDR5 5600 MHz memory modules
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V & I226LM)	2 x 2.5GbE LAN Ports (Intel® I226V & I226LM)
Graphic	Integrated Graphics Processor - Intel® Graphics: 2 x HDMI 2.1 (HDMI 2 port support CEC) 2 independent display outputs	Integrated Graphics Processor - Intel® Graphics: 2 x HDMI 2.1 (HDMI 2 port support CEC) 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x External Antenna Hole (Optional)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x External Antenna Hole (Optional)
Rear I/O	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x Remote control 1 x 3-pin Terminal Block	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x Remote control 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Power	A1: +12V~36VDC (Full Range)	A2: +12V~36VDC (Adapter 19V/135W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP155UAMR-SI (Box packing) 6BQP125UAMR-SI (Box packing)	6BQP155UAMR-SI (Box packing) 6BQP125UAMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



Model Name	QBiX-Pro-RPLA1355H-A1 QBiX-Pro-RPLA1335H-A1 QBiX-Pro-RPLA1315EH-A1	QBiX-Pro-RPLA1355H-A2 QBiX-Pro-RPLA1335H-A2 QBiX-Pro-RPLA1315EH-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Core™ i7-1355U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 5.0 GHz Intel® Core™ i5-1335U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.6 GHz Intel® Core™ i3-1315UE Processor Intel® 7, 6 cores, 2P+4E, 8 threads, up to 4.5 GHz	Intel® Core™ i7-1355U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 5.0 GHz Intel® Core™ i5-1335U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.6 GHz Intel® Core™ i3-1315UE Processor Intel® 7, 6 cores, 2P+4E, 8 threads, up to 4.5 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226V)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe/UHD Graphics for 13th Gen Intel® Processors: 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® Iris® Xe/UHD Graphics for 13th Gen Intel® Processors: 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x External Antenna Hole (Optional)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x External Antenna Hole (Optional)
Rear I/O	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 3-pin Terminal Block	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0
Power	A1: +9V~36VDC (Full Range)	A2: +9V~36VDC (Adapter 19.5V/135W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP1355AMR-SI (Box packing) 6BQP1335AMR-SI (Box packing) 6BQP1315AMR-SI (Box packing)	6BQP1355AMR-SI (Box packing) 6BQP1335AMR-SI (Box packing) 6BQP1315AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



Model Name	QBiX-Pro-ADLA1255H-A1 QBiX-Pro-ADLA1235H-A1 QBiX-Pro-ADLA1215EH-A1	QBiX-Pro-ADLA1255H-A2 QBiX-Pro-ADLA1235H-A2 QBiX-Pro-ADLA1215EH-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Core™ i7-1255U Processor Intel® 7, 10 cores, 12 threads, up to 4.7 GHz Intel® Core™ i5-1235U Processor Intel® 7, 10 cores, 12 threads, up to 4.4 GHz Intel® Core™ i3-1215UE Processor Intel® 7, 6 cores, 8 threads, up to 4.4 GHz	Intel® Core™ i7-1255U Processor Intel® 7, 10 cores, 12 threads, up to 4.7 GHz Intel® Core™ i5-1235U Processor Intel® 7, 10 cores, 12 threads, up to 4.4 GHz Intel® Core™ i3-1215UE Processor Intel® 7, 6 cores, 8 threads, up to 4.4 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226V)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe/UHD Graphics : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® Iris® Xe/UHD Graphics : 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x External Antenna Hole (Optional)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x External Antenna Hole (Optional)
Rear I/O	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 3-pin Terminal Block	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	—	—
Power	A1: +9V~36VDC (Full Range)	A2: +9V~36VDC (Adapter 19.5V/135W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP1255AMR-SI (Box packing) 6BQP1235AMR-SI (Box packing) 6BQP1215AMR-SI (Box packing)	6BQP1255AMR-SI (Box packing) 6BQP1235AMR-SI (Box packing) 6BQP1215AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



Model Name	QBiX-Pro-TGLA1135G7H-A1 QBiX-Pro-TGLA1115G4EH-A1	QBiX-Pro-TGLA1135G7H-A2 QBiX-Pro-TGLA1115G4EH-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.9 GHz	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.9 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris Xe/UHD Graphics for 11th Gen Intel® Processors : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® Iris Xe/UHD Graphics for 11th Gen Intel® Processors : 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)
Rear I/O	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 3-pin Terminal Block	2 x USB 2.0 2 x COM Ports (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	—	—
Power	A1: +9V~36VDC (Full Range)	A2: +9V~36VDC (Adapter 19.5V/135W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP1135AMR-SI (Box packing) 6BQP1115AMR-SI (Box packing)	6BQP1135AMR-SI (Box packing) 6BQP1115AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



Model Name	QBiX-Pro-WHLA8145H-A1	QBiX-Pro-WHLA8145H-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Core™ i3-8145UE Processor 14nm, 2 cores, 4 threads, up to 3.9 GHz	Intel® Core™ i3-8145UE Processor 14nm, 2 cores, 4 threads, up to 3.9 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics 620 : 2 x HDMI 1.4 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 620 : 2 x HDMI 1.4 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)
Rear I/O	2 x USB 2.0 2 x COM Ports (RS-232) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 3-pin Terminal Block	2 x USB 2.0 2 x COM Ports (RS-232) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	—	—
Power	+9V~36VDC (Full Range)	+9V~36VDC (Adapter 19V/90W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional)	Wall mount (Optional)
Ordering Information	6BQP8145AMR-SI (Box packing)	6BQP8145AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



QBiX-Pro Series

Model Name	QBiX-Pro-KBLB7200H-A2	QBiX-Pro-KBLB7100H-A1	QBiX-Pro-KBLB3965H-A1
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Core™ i5-7200U Processor 14nm, 2 cores, 4 threads, up to 3.1 GHz	Intel® Core™ i3-7100U Processor 14nm, 2 cores, 4 threads, 2.4 GHz	Intel® Celeron® 3965U Processor 14nm, 2 cores, 2 threads, 2.2 GHz
Chipset	SoC	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2133 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2133 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2133 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics 620: 1 x HDMI 2.0 1 x Display Port 2 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 620: 1 x HDMI 2.0 1 x Display Port 2 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 610: 1 x HDMI 2.0 1 x Display Port 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x HDMI 1 x Display Port 1 x Power switch 1 x Power & HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x HDMI 1 x Display Port 1 x Power switch 1 x Power & HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x HDMI 1 x Display Port 1 x Power switch 1 x Power & HDD LED 1 x COM Port (RS-232/422/485 & RI/5V/12V)
Rear I/O	2 x USB 2.0 3 x COM Ports (RS-232) 1 x Screw Type DC Jack	2 x USB 2.0 3 x COM Ports (RS-232) 1 x 3-pin Terminal Block	2 x USB 2.0 3 x COM Ports (RS-232) 1 x 3-pin Terminal Block
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	—	—	—
Power	+9V~36VDC (Adapter 19V/65W)	+9V~36VDC (Full Range)	+9V~36VDC (Full Range)
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional)	Wall mount (Optional)	Wall mount (Optional)
Ordering Information	6BQP7200AMR-SI (Box packing)	6BCKACMR-SI (Box packing)	6BQP3965AMR-SI (Box packing)
Built-in Components	—	—	—

QBiX-Pro Series

New



New



Model Name	QBiX-Pro-AMLA7433REH-A1	QBiX-Pro-AMLA7433REH-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Atom® x7433RE Processor Intel 7, 4 cores, up to 3.4 GHz	Intel® Atom® x7433RE Processor Intel 7, 4 cores, up to 3.4 GHz
Chipset	SoC	SoC
Memory	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I225V)	2 x 2.5GbE LAN Ports (Intel® I225V)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics : 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen3x2) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen3x2) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Headphone Jack	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Headphone Jack
Rear I/O	2 x USB 2.0 1 x COM Port (RS-232/422/485) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8 bits) 1 x Remote control 1 x 3-pin Terminal Block	2 x USB 2.0 1 x COM Port (RS-232/422/485) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8 bits) 1 x Remote control 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Power	+12V~36VDC (Full Range)	+12V~36VDC (Adapter 19V/65W)
Operating Temp.	-20°C to 70°C	-20°C to 70°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP7433AMR-SI (Box packing)	6BQP7433AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



QBiX-Pro Series

Model Name	QBiX-Pro-ADNAN97H-A1	QBiX-Pro-ADNAN97H-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Processor N97 Intel® 7, 4 cores, 4 threads, up to 3.6 GHz	Intel® Processor N97 Intel® 7, 4 cores, 4 threads, up to 3.6 GHz
Chipset	SoC	SoC
Memory	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Dual Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Dual Channel DDR5 4800 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I225V)	2 x 2.5GbE LAN Ports (Intel® I225V)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics support: 2 x HDMI 2.0b 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics support: 2 x HDMI 2.0b 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Headphone Jack	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Headphone Jack
Rear I/O	2 x USB 2.0 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x COM Port (RS-232) 1 x GPIO (8 bits) 1 x 3-pin Terminal Block	2 x USB 2.0 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x COM Port (RS-232) 1 x GPIO (8 bits) 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Power	+12V~36VDC (Full Range)	+12V~36VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQPN970AMR-SI (Box packing)	6BQPN970AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



Model Name	QBiX-Pro-EHLA6412H-A1	QBiX-Pro-EHLA6412H-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Intel® I210AT)	2 x GbE LAN Ports (Intel® I210AT)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors : 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIex2, SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIex2, SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Headphone Jack 2 x USB 2.0	2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 2 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Headphone Jack 2 x USB 2.0
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x COM Port (RS-232) 1 x GPIO (8 bits) 1 x 3-pin Terminal Block	1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x COM Port (RS-232) 1 x GPIO (8 bits) 1 x Screw Type DC Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	—	—
Power	+12V~36VDC (Full Range)	+12V~36VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP6412AMR-SI (Box packing)	6BQP6412AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Pro Series



QBiX-Pro Series

Model Name	QBiX-Pro-APLB4200H-A1	QBiX-Pro-APLB4200H-B1	QBiX-Pro-BYTA1900H-A1
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	Intel® Pentium® N4200 Processor 14nm, 4 cores, 4 threads, up to 2.5 GHz	Intel® Pentium® N4200 Processor 14nm, 4 cores, 4 threads, up to 2.5 GHz	Intel® Celeron® J1900 Processor 22nm, 4 cores, 4 threads, up to 2.42 GHz
Chipset	SoC	SoC	SoC
Memory	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz	1 x DDR3L SO-DIMM socket, Max. Capacity 8 GB, Support Single Channel DDR3L 1333MHz
Ethernet	2 x GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics 505: 1 x HDMI 1.4 1 x VGA 2 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 505: 1 x HDMI 1.4 1 x VGA 2 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics: 1 x HDMI 1.4 1 x VGA 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 3Gb/s)
Expansion Slots	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (SATA 3Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 1 x HDMI 1 x VGA 1 x Power switch 1 x Power & HDD LED 1 x Headphone Jack	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 1 x HDMI 1 x VGA 1 x Power switch 1 x Power & HDD LED 1 x Headphone Jack	2 x RJ45 LAN Ports 1 x USB 3.2 Gen 1 1 x USB 2.0 1 x HDMI 1 x VGA 1 x Power switch 1 x Power & HDD LED 1 x Headphone Jack
Rear I/O	2 x USB 2.0 1 x COM Port (RS-232/422/485 & RI/5V/12V) 3 x COM Ports (RS-232) 1 x 3-pin Terminal Block	2 x USB 2.0 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 1 x GPIO (8 bits) 1 x 3-pin Terminal Block	2 x USB 2.0 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 2 x COM Ports (RS-232) 1 x 3-pin Terminal Block
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	—	—	—
Power	+9V~36VDC (Full Range)	+9V~36VDC (Full Range)	+9V~36VDC (Full Range)
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional)	Wall mount (Optional)	Wall mount (Optional)
Ordering Information	6BCBABMR-SI (Box packing)	6BQP4200BMR-SI (Box packing)	6BQP1900AMR-SI (Box packing)
Built-in Components	—	—	—

QBiX-Pro Series

New



New



Model Name	QBiX-Pro-AMDA2314H-A1	QBiX-Pro-AMDA2314H-A2
Dimension	178W x 125D x 52.7H (mm)	178W x 125D x 52.7H (mm)
CPU	AMD® RYZEN™ R2314 Embedded Processor 14nm, 4 cores, 4 threads, 2.1 GHz, up to 3.5 GHz	AMD® RYZEN™ R2314 Embedded Processor 14nm, 4 cores, 4 threads, 2.1 GHz, up to 3.5 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2667 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2667 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H-CG)	2 x GbE LAN Ports (Realtek® RTL8111H-CG)
Graphic	Integrated Graphics Processor- AMD® Radeon™ Graphics: 4 x HDMI 2.0 4 independent display outputs	Integrated Graphics Processor- AMD® Radeon™ Graphics: 4 x HDMI 2.0 4 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen 3x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 4 x HDMI 1 x Power button with LED 1 x HDD LED 1 x External Antenna Hole (Optional)	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 4 x HDMI 1 x Power button with LED 1 x HDD LED 1 x External Antenna Hole (Optional)
Rear I/O	2 x USB 2.0 1 x GPIO (8 bits) 2 x COM Port (RS-232/422/485) 1 x Remote control 1 x 3-pin Terminal Block 1 x Headphone & Headset Combo Jack	2 x USB 2.0 1 x GPIO (8 bits) 2 x COM Port (RS-232/422/485) 1 x Remote control 1 x Screw Type DC Jack 1 x Headphone & Headset Combo Jack
Side I/O	2 x External Antenna Holes (Optional)	2 x External Antenna Holes (Optional)
TPM	Onboard TPM 2.0 security chip INFINEON SLB9665TT2.0	Onboard TPM 2.0 security chip INFINEON SLB9665TT2.0
Power	+9V~36VDC (Full Range)	+9V~36VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional) / VESA mount (Optional)	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	6BQP2314AMR-SI (Box packing)	6BQP2314AMR-SI (Box packing)
Built-in Components	—	—

QBiX-DIN Rail Series

New



Model Name	QBiX-DR-AMLA7433REH-A1	QBiX-DR-EHLA6412H-A1
Dimension	160W x 118D x 62.6H (mm)	160W x 118D x 62.6H (mm)
CPU	Intel® Atom® x7433RE Processor Intel 7, 4 cores, up to 3.40 GHz	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz
Chipset	SoC	SoC
Memory	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Single Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226IT)	2 x GbE LAN Ports (Intel® I210AT)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics: 1 x HDMI 2.0 1 x VGA 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 1 x HDMI 2.0 1 x VGA 2 independent display outputs
Audio	Realtek® Audio codec	Realtek® Audio codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052/3042 M.2 B key with SIM Slot –4G/5G Support 1 x Vertical USB 2.0	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052/3042 M.2 B key with SIM Slot –4G/5G Support 1 x Vertical USB 2.0
Front I/O	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x USB 2.0 1 x HDMI 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 1 x Power button with LED 1 x WiFi/HDD LED 1 x Remote control connector 1 x Headphone & Headset Combo Jack 1 x External Antenna Hole (Optional)	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x USB 2.0 1 x HDMI 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 1 x Power button with LED 1 x WiFi/HDD LED 1 x Remote control connector 1 x Headphone Jack 1 x External Antenna Hole (Optional)
Rear I/O	1 x Din Rail Mounting Support	1 x Din Rail Mounting Support
Side I/O	1 x GPIO (8 bits) 1 x 3-pin Terminal Block 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x CANBus 2 x External Antenna Holes (Optional)	1 x GPIO (8 bits) 1 x 3-pin Terminal Block 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x External Antenna Holes (Optional)
TPM	Onboard TPM 2.0 security chip Nuvoton NPCT764AABYX	—
Power	+9V~36VDC (Full Range)	+9V~36VDC (Full Range)
Operating Temp.	-20°C to +70°C	0°C to 50°C
Mounting	DIN Rail	DIN Rail
Ordering Information	6BDR7433AMR-SI (Box packing)	6BDR6412AMR-SI (Box packing)
Built-in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com	—

QBiX-Expert Series

New



New



Model Name	QBiX-Expert-RPLA1340PH-A1	QBiX-Expert-RPLA1320PEH-A1
Dimension	210.36W x 165D x 65H (mm)	210.36W x 165D x 65H (mm)
CPU	Intel® Core™ i5-1340P Processor Intel® 7, 12 cores, 16 threads, up to 4.6 GHz	Intel® Core™ i3-1320PE Processor Intel® 7, 8 cores, 12 threads, up to 4.5 GHz
Chipset	SoC	SoC
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V) 4 x GbE LAN Ports (Intel® I226V) 4 x GbE LAN Ports with POE support (Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226V) 4 x GbE LAN Ports (Intel® I226V) 4 x GbE LAN Ports with POE support (Intel® I226V)
Graphic	Integrated Graphics Processor - Intel® Iris X® Graphics eligible: 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 13th Gen Intel® Processors: 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	2 x Swappable 2.5" HDD/SSD (SATA 6Gb/s)	2 x Swappable 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052 M.2 B-Key with SIM slot	1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052 M.2 B-Key with SIM slot
Front I/O	4 x RJ45 LAN Ports with POE 4 x RJ45 LAN Ports 1 x GPIO (8 bits) 1 x HDD LED 1 x Power button with LED 1 x Combo audio jack (Headphone & Headset)	4 x RJ45 LAN Ports with POE 4 x RJ45 LAN Ports 1 x GPIO (8 bits) 1 x HDD LED 1 x Power button with LED 1 x Combo audio jack (Headphone & Headset)
Rear I/O	2 x RJ45 LAN Ports 1 x COM Port (RS-232/422/485 & RI/5V/12V) 3 x COM Ports (RS-232/422/485) 4 x USB 3.2 Gen 1 4 x USB 2.0 2 x HDMI 1 x Ignition support (3-pin) 1 x 4-pin Terminal Block	2 x RJ45 LAN Ports 1 x COM Port (RS-232/422/485 & RI/5V/12V) 3 x COM Ports (RS-232/422/485) 4 x USB 3.2 Gen 1 4 x USB 2.0 2 x HDMI 1 x Ignition support (3-pin) 1 x 4-pin Terminal Block
Side I/O	4 x External Antenna Holes (wifi/5G) - Optional	4 x External Antenna Holes (wifi/5G) - Optional
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672XU2.0	Onboard TPM 2.0 security chip INFINEON SLB9672XU2.0
Power	+19~36VDC	+19~36VDC
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	—	—
Ordering Information	6BQE1340AMR-SI (Box Packing)	6BQE1320AMR-SI (Box Packing)
Built-in Components	—	—

QBiX-Expert Series



Model Name	QBiX-Expert-TGLA1165G7H-A1	QBiX-Expert-TGLA1135G7H-A1	QBiX-Expert-TGLA1115G4EH-A1
Dimension	210.36W x 165D x 67H (mm)	210.36W x 165D x 67H (mm)	210.36W x 165D x 67H (mm)
CPU	Intel® Core™ i7-1165G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.7 GHz	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz	Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.90 GHz
Chipset	SoC	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT) 4 x PoE GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT) 4 x PoE GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT) 4 x PoE GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris X® Graphics : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® Iris X® Graphics : 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® Iris X® Graphics: 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x Swappable 2.5" HDD/SSD (SATA 6Gb/s)	1 x Swappable 2.5" HDD/SSD (SATA 6Gb/s)	1 x Swappable 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	4 x RJ45 LAN Ports with PoE 2 x USB 2.0 1 x Power button with LED 1 x HDD LED 2 x COM Ports (RS-232/422/485) 2 x External Antenna Holes (Optional)	4 x RJ45 LAN Ports with PoE 2 x USB 2.0 1 x Power button with LED 1 x HDD LED 2 x COM Ports (RS-232/422/485) 2 x External Antenna Holes (Optional)	4 x RJ45 LAN Ports with PoE 2 x USB 2.0 1 x Power button with LED 1 x HDD LED 2 x COM Ports (RS-232/422/485) 2 x External Antenna Holes (Optional)
Rear I/O	2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 4-pin Terminal Block	2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 4-pin Terminal Block	2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x COM Port (RS-232/422/485) 1 x GPIO (8 bits) 1 x Headphone Jack 1 x 4-pin Terminal Block
Side I/O	—	—	—
TPM	—	—	—
Power	+12~24VDC / 13A (PoE support)	+12~24VDC / 13A (PoE support)	+12~24VDC / 13A (PoE support)
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Optional)	Wall mount (Optional)	Wall mount (Optional)
Ordering Information	6BQE1165AMR-SI (Box packing)	6BQE1135AMR-SI (Box packing)	6BQE1115AMR-SI (Box packing)
Built-in Components	—	—	—

QBiX-ITX Series



Model Name	QBiX-ITX-Chassis Kit
Dimension	210W x 200D x 58H (mm)
Support Model	mITX-Q670A mITX-H610A mITX-Q47EA mITX-H42EA mITX-Q370A mITX-H310A
Chipset	Refer to MB
Storage Drive Bay	1 x 2.5" Drive Bay
Expansion Slots	Refer to Motherboard
Front I/O	4 x USB 2.0 1 x Power button with LED 1 x Power/HDD LED
Rear I/O	2 x External Antenna Holes Others are refer to Motherboard
Side I/O	—
TPM	Refer to Motherboard
Power	Refer to Motherboard
Operating Temp.	0°C to 50°C
Mounting	Wall Mount, VESA 75/100
Ordering Information	6BQIH310AMR-SI (Box packing)-MITX-H310A
Built-in Components	—

QBiX-Jumbo Series



Model Name	QBiX-JMB-ADLA67EH-B1	QBiX-JMB-ADLA67EHD-B1
Dimension	224W x 256.1D x 77.7H (mm)	224W x 257D x 146H (mm)
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package
Chipset	Intel® Q670E Chipset	Intel® Q670E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	1 x 2.5GbE LAN Port (Intel® I226V) 1 x GbE LAN Port (Intel® I219LM, Vpro support) 2 x GbE LAN Ports (Intel® I211AT)	1 x 2.5GbE LAN Port (Intel® I226V) 1 x GbE LAN Port (Intel® I219LM, Vpro support) 2 x GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	4 x 2.5" HDD/SSD (SATA 6Gb/s) 1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	4 x 2.5" HDD/SSD (SATA 6Gb/s) 1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Expansion Slots		1 x PCIe x4 (Gen3 x4) 2 x PCIe x16 — Single at Gen3 x16 only or — Dual at Gen3 x8 + Gen3 x8
Front I/O	1 x Power Switch /Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 1 x Remote control terminal block header 2 x External Antenna Holes (Optional)	1 x Power Switch /Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 1 x Remote control terminal block header 2 x External Antenna Holes (Optional)
Rear I/O	—	—
Power	+12V~48VDC (Full Range)	+24V~48VDC (Full Range)
Operating Temp.	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W) -20°C to 35°C (with Graphic card RTX3090)
Ordering Information	6BQJQ67EBMR-SI (Box packing)	9BQJQ67EBMR-SI + 6BQJQ67EBPR-SI
Build in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com	
Note	—	—

QBiX-Jumbo Series



Model Name	QBiX-JMB-ADLA67EH-A1	QBiX-JMB-ADLA67EHG-A1	QBiX-JMB-ADLA67EHG-B1
Dimension	224W x 256.1D x 77.7H (mm)	224W x 343D x 146H (mm)	224W x 368D x 166.3H (mm)
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package
Chipset	Intel® Q670E Chipset	Intel® Q670E Chipset	Intel® Q670E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	1 x 2.5GbE LAN Port (Intel® I226V) 1 x GbE LAN Port (Intel® I219LM, Vpro support) 2 x GbE LAN Ports (Intel® I211AT)	1 x 2.5GbE LAN Port (Intel® I226V) 1 x GbE LAN Port (Intel® I219LM, Vpro support) 2 x GbE LAN Ports (Intel® I211AT)	1 x 2.5GbE LAN Port (Intel® I226V) 1 x GbE LAN Port (Intel® I219LM, Vpro support) 2 x GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	4 x 2.5" HDD/SSD (SATA 6Gb/s)	4 x 2.5" HDD/SSD (SATA 6Gb/s)	4 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x16 (Gen3 x16)	1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x PCIe x4 (Gen3 x4) 2 x PCIe x16 — Single at Gen3 x16 only or — Dual at Gen3 x8 + Gen3 x8
Front I/O	1 x Power Switch /Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)	1 x Power Switch /Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)	1 x Power Switch /Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)
Rear I/O	—	—	—
Power	+12V~48VDC (Full Range)	+24V~48VDC (Full Range)	+24V~48VDC (Full Range)
Operating Temp.	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W) -20°C to 35°C (with Graphic card RTX3090)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W) -20°C to 35°C (with Graphic card RTX3090)
Ordering Information	6BQJQ67EAMR-SI (Box packing)	9BQJQ67EAMR-SI + 6BQJH310APR-SI	9BQJQ67EAMR-SI + 6BQJH310BPR-SI
Build in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com		
Note	—	—	—

QBiX-Jumbo Series



Model Name	QBiX-JMB-CMLA47EH-A1	QBiX-JMB-CMLA47EHG-A1
Dimension	224W x 256.1D x 77.7H (mm)	224W x 343D x 146H (mm)
CPU	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1200 package	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1200 package
Chipset	Intel® Q470E Chipset	Intel® Q470E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz
Ethernet	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	4 x 2.5" HDD/SSD (SATA 6Gb/s) 1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	4 x 2.5" HDD/SSD (SATA 6Gb/s) 1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Expansion Slots	1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x16 (Gen3 x16)
Front I/O	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)
Rear I/O	—	—
Power	+12V~48VDC (Full Range)	+24V~48VDC (Full Range)
Operating Temp.	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W)
Ordering Information	6BQJQ47EAMR-SI (Box packing)	9BQJQ47EAMR-SI + 6BQJH310APR-SI
Build in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com	
Note	—	—

QBiX-Jumbo Series



Model Name	QBiX-JMB-CMLA47EHG-B1	QBiX-JMB-CMLA47EHGP-A1
Dimension	224W x 368D x 166.3H (mm)	224W x 368D x 166.3H (mm)
CPU	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1200 package	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1200 package
Chipset	Intel® Q470E Chipset	Intel® Q470E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz
Ethernet	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	4 x 2.5" HDD/SSD (SATA 6Gb/s)	4 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x PCIe x4 (Gen3 x4) 2 x PCIe x16 — Single at Gen3 x16 only or — Dual at Gen3 x8 + Gen3 x8	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x PCIe x4 (Gen3 x4) 2 x PCIe x16 — Single at Gen3 x16 only or — Dual at Gen3 x8 + Gen3 x8
Front I/O	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 6 x USB 2.0 2 x External Antenna Holes (Optional)
Rear I/O	—	—
Power	+24V~48VDC (Full Range)	850W Power Supply Built-in
Operating Temp.	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W)
Ordering Information	9BQJQ47EAMR-SI + 6BQJH310BPR-SI	9BQJQ47EPMR-SI (Box packing)
Build in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com	
Note	—	※Support Discrete GFX Max. 350W

QBiX-Jumbo Series



Model Name	QBiX-JMB-CFLA310H-A1	QBiX-JMB-CFLA310HG-A1	QBiX-JMB-CFLA310HG-B1
Dimension	224W x 257D x 77H (mm)	224W x 343D x 146H (mm)	224W x 368D x 166.3H (mm)
CPU	Support for 9th/8th Generation Intel® Core™ i7/i5/i3 processors in the LGA1151 package	Support for 9th/8th Generation Intel® Core™ i7/i5/i3 processors in the LGA1151 package	Support for 9th/8th Generation Intel® Core™ i7/i5/i3 processors in the LGA1151 package
Chipset	Intel® H310 Chipset	Intel® H310 Chipset	Intel® H310 Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2666/2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2666/2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2666/2400 MHz
Ethernet	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)	4 x GbE LAN Ports (1 x Intel® I219V and 3 x Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 2 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 2 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics: 1 x Display Port 1 x DVI-D 1 x VGA 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	3 x 2.5" HDD/SSD (SATA 6Gb/s)	3 x 2.5" HDD/SSD (SATA 6Gb/s)	3 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot 1 x PCIe x4 (Gen3 x1) 1 x PCIe x16 (Gen3 x16)	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot 1 x PCIe x4 (Gen3 x1) 1 x PCIe x16 (Gen3 x16)
Front I/O	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 4 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 4 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display Port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 4 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 4 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)
Rear I/O	—	—	—
Power	+12V~48VDC (Full Range)	+24V~48VDC (Full Range)	+24V~48VDC (Full Range)
Operating Temp.	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W) -20°C to 50°C (CPU TDP 35W, i3-8100T, Tj 82°C)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W) -20°C to 50°C (CPU TDP 35W, i3-8100T, Tj 82°C)	-20°C to 50°C (CPU TDP 65W) -20°C to 60°C (CPU TDP 35W) -20°C to 50°C (CPU TDP 35W, i3-8100T, Tj 82°C)
Ordering Information	9BQJH310AMR-SI (Box packing)	9BQJH310AMR-SI + 6BQJH310APR-SI	9BQJH310AMR-SI + 6BQJH310BPR-SI
Build in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com		
Note		※Support Discrete GFX Max. 250W	※Support Discrete GFX Max. 250W

QBiX-WP Series

New



Model Name	QBiX-WP-ADLA1235UH-A1	QBiX-WP-WHLA8265H-A1	QBiX-WP-APLA3940H-A1
Dimension	188W x 155D x 72H (mm)	188W x 155D x 72H (mm)	188W x 155D x 72H (mm)
CPU	Intel® Core™ i5-1235U Processor 10nm, 10 cores, 12 threads, up to 4.40 GHz	Intel® Core™ i5-8265U Processor 14nm, 4 cores, 8 threads, up to 3.9 GHz	Intel® Atom® x5-E3940 Processor 14nm, 4 cores, 4 threads, up to 1.8 GHz
Chipset	SoC	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris® X® Graphics: 1 x HDMI 2.0	Integrated Graphics Processor - Intel® UHD Graphics 620: 1 x HDMI 1.4	Integrated Graphics Processor - Intel® HD Graphics 500: 1 x HDMI 1.4
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	2 x (M12) RJ45 LAN Ports 2 x (IP67) USB 2.0 connector 1 x (IP67) HDMI connector 1 x (IP67) Power switch 1 x (M8) Power & HDD LED	2 x (M12) RJ45 LAN Ports 2 x (IP67) USB 2.0 connector 1 x (IP67) HDMI connector 1 x (IP67) Power switch 1 x (M8) Power & HDD LED	2 x (M12) RJ45 LAN Ports 2 x (IP67) USB 2.0 connector 1 x (IP67) HDMI connector 1 x (IP67) Power switch 1 x (M8) Power & HDD LED
Rear I/O	1 x (M12) COM Port (RS-232/422/485 & RI/5V/12V) 2 x (M12) CAN BUS 1 x (M12) GPIO (8 bits) 1 x (M12) DC IN	1 x (M12) COM Port (RS-232/422/485 & RI/5V/12V) 2 x (M12) COM Ports (RS-232) 1 x (M12) GPIO (8 bits) 1 x (M12) DC IN	1 x (M12) COM Port (RS-232/422/485 & RI/5V/12V) 2 x (M12) COM Ports (RS-232) 1 x (M12) GPIO (8 bits) 1 x (M12) DC Jack
Power	+9V~36VDC	+9V~36VDC	+9V~36VDC
Operating Temp.	-20°C to 70°C	-20°C to 70°C	-20°C to 80°C
Ordering Information	—	9BQW8265AMR-SI (Box packing)	9BQW3940AMR-SI (Box packing)
Build in Components	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com		

QBiX-Jetson Series

Preliminary



Preliminary



Preliminary



QBiX-Jetson Series

Model Name	QN-ORAX64-A1	QN-ORAX32-A1	QN-ORN16GH-A1
Dimension	175W x 145D x 85H (mm)	175W x 145D x 85H (mm)	210W x 169.8D x 55.2H (mm)
SOC	Nvidia Jetson AGX Orin 64GB - Optional	Nvidia Jetson AGX Orin 32GB	Nvidia Jetson Orin NX 16GB
GPU	2048-core NVIDIA Ampere architecture GPU with 64 Tensor Cores	1792-core NVIDIA Ampere architecture GPU with 56 Tensor Cores	1024 NVIDIA CUDA cores with 32 Tensor cores
CPU	12-core Arm® Cortex®-A78AE v8.2 64-bit CPU, 3MB L2 + 6MB L3	8-core Arm® Cortex®-A78AE v8.2 64-bit CPU, 2MB L2 + 4MB L3	8-core Arm® Cortex®-A78AE v8.2 64-bit CPU, 2MB L2 + 4MB L3
Memory	64GB 256-bit LPDDR5 204.8GB/s	32GB 256-bit LPDDR5 204.8GB/s	16GB 128-bit LPDDR5
Ethernet	1 x GbE RTL8211F-CG 1 x GbE PCIe RTL8111H 4 x (PCIe) 10/100/1000Mbps Ethernet (Optional 2 Ports PoE support) - RTL8111H (POE_PSE min : Total 30W, 2 Ports x 15W)	1 x GbE RTL8211F-CG 1 x GbE PCIe RTL8111H 4 x (PCIe) 10/100/1000Mbps Ethernet (Optional 2 Ports PoE support) - RTL8111H (POE_PSE min : Total 30W, 2 Ports x 15W)	8 x GbE LAN with PoE 15W/port (IEEE802.3af) 2 x GbE LAN
Graphic	1 x HDMI 2.0	1 x HDMI 2.0	1 x HDMI 2.0 1 x Display Port
Audio	—	—	—
Storage	1 x 64G eMMC 5.1 (Module) 2 x 2280 M.2 M-Key (SATA or PCIe GEN4)	1 x 32G eMMC 5.1 (Module) 2 x 2280 M.2 M-Key (SATA or PCIe GEN4)	1 x SATA 6Gb/s (Swappable 2.5" HDD/SSD)
Expansion Slots	2 x 2280 M.2 M-Key (PCIe x4) 1 x 3052/3042 M.2 B-Key for 5G/LTE (USB 3.2 Gen 2 only) 1 x 2230 M.2 E-Key for WiFi 5/6 1 x M.2 - OOB module (optional)	2 x 2280 M.2 M-Key (PCIe x4) 1 x 3052/3042 M.2 B-Key for 5G/LTE (USB 3.2 Gen 2 only) 1 x 2230 M.2 E-Key for WiFi 5/6 1 x M.2 - OOB module (optional)	1 x 2280 M.2 B-Key (NVME) 1 x Mini PCIe (USB 2.0) 1 x 2230 M.2 E-Key 1 x SIM slot
Front I/O	2 x USB 3.2 Gen 2 1 x USB 3.2 Gen 2 Type-C (OTG) 1 x Mic-in (Mono), line-out (Stereo) 1 x Power/reset button 2 x External Antenna Holes (Optional) 1 x Remote control header 2 x COM Ports (RS-232/422/485)	2 x USB 3.2 Gen 2 1 x USB 3.2 Gen 2 Type-C (OTG) 1 x Mic-in (Mono), line-out (Stereo) 1 x Power/reset button 2 x External Antenna Holes (Optional) 1 x Remote control header 2 x COM Ports (RS-232/422/485)	1 x USB 2.0 Type Micro B 1 x SD slot (Micro SD) 1 x HDMI 1 x Display Port 1 x Power button with LED 1 x HDD LED 1 x GPIO (8 bits) 1 x Recovery button 2 x External Antenna Holes (Optional) 1 x 2.5" SSD/HDD SATA Extension
Rear I/O	2 x COM Ports (RS-232/422/485) 1 x 3-pin Terminal Block 1 x CANBus 2.0b, isolated (DB9) 6 x user defined LEDs (GPIO for user programming) 2 x GbE LAN Ports 4 x GbE LAN Ports (Support POE) 1 x HDMI 2 x USB 3.2 Gen 2	2 x COM Ports (RS-232/422/485) 1 x 3-pin Terminal Block 1 x CANBus 2.0b, isolated (DB9) 6 x user defined LEDs (GPIO for user programming) 2 x GbE LAN Ports 4 x GbE LAN Ports (Support POE) 1 x HDMI 2 x USB 3.2 Gen 2	4 x COM Ports (RS-232/422/485) 1 x 3-pin Terminal Block 8 x GbE LAN Ports with PoE 15W/Port 2 x GbE LAN Ports 4 x USB 3.2 Gen 1
Side I/O	4 x External Antenna Holes (Optional)	4 x External Antenna Holes (Optional)	4 x External Antenna Holes (Optional)
Power	+19V~24VDC (Terminal Block)	+19V~24VDC (Terminal Block)	+12V~54VDC (non PoE) +54VDC (PoE support)
Operating Temp.	-20°C to 60°C	-20°C to 60°C	-20°C to 70°C
Ordering Information	9BQNORAXBMR-SI (Box packing)	9BQNORAXAMR-SI (Box packing)	9BQNORNXCMT-SI (Box packing)
Build in Components	—	—	—

QBiX-Jetson Series

New



Model Name	QN-ORN16	QBiX-Jetson-XavierAHP-A1	QBiX-Jetson-NanoAHP-A1
Dimension	124W x 127.6D x 47.7H (mm)	210W x 169.8D x 55.2H (mm)	210W x 169.8D x 55.2H (mm)
SOC	NVIDIA® Jetson Orin™ NX 16GB	NVIDIA® Jetson Xavier™ NX 8GB	NVIDIA® Jetson Nano™ 4GB
GPU	1024-core NVIDIA CUDA Ampere architecture GPU with 32 Tensor Cores	384-core NVIDIA Volta™ architecture GPU with 48 Tensor Cores	NVIDIA Maxwell architecture with 128 NVIDIA CUDA® cores
CPU	8-core Arm® Cortex®-A78AE v8.2 64-bit CPU, 2MB L2 + 4MB L3	6-core NVIDIA Carmel Arm®v8.2 64-bit CPU, 6MB L2 + 4MB L3	Quad-core ARM® Cortex®-A57 MPCore processor with NEON Technology
Memory	16GB 128-bit LPDDR5	8GB 128-bit LPDDR4x, 59.7GB/s	4GB 64-bit LPDDR4x, 25.6GB/s
Ethernet	1 x GbE LAN	8 x GbE LAN with PoE 15W/Port (PoE Optional) 2 x GbE LAN	8 x GbE LAN with PoE 15W/Port (PoE Optional) 2 x GbE LAN
Graphic	1 x HDMI 2.0	1 x HDMI 1 x Display Port	1 x HDMI 1 x Display Port
Audio	—	—	—
Storage	1 x 2280 M.2 SSD (PCIe Gen3x2)	1 x 16G eMMC 5.1 (Module) 1 x SATA 6Gb/s (Swappable 2.5" HDD/SSD)	1 x 16G eMMC 5.1 (Module) 1 x SATA 6Gb/s (Swappable 2.5" HDD/SSD)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4, Support HDMI Capture card) 1 x 2230 M.2 E-Key	1 x 3052 M.2 B-Key (PCIe x1, USB 3.2 Gen 1x1) 1 x Mini PCIe (USB 2.0 only) 1 x 2230 M.2 E-Key - Intel® AC 8265 (Optional) 1 x SIM slot	1 x 3052 M.2 B-Key (USB 3.2 Gen 1x1) 1 x Mini PCIe (USB 2.0 only) 1 x 2230 M.2 E-Key - Intel® AC 8265 (Optional) 1 x SIM slot
Front I/O	1 x USB 3.2 Gen 1 Type C, 5V/1A (not support USB to NVME dock) 2 x USB 2.0 1 x Power button with LED 1 x Recovery button	1 x Micro SD card 1 x Micro USB 2.0 (OTD) 1 x HDMI 2.0 1 x Display Port 1 x Power button with LED 1 x HDD LED 1 x GPIO (12 bits) 1 x Recovery button 2 x External Antenna Holes (Optional)	1 x Micro SD card 1 x Micro USB 2.0 (OTD) 1 x HDMI 2.0 1 x Display Port 1 x Power button with LED 1 x HDD LED 1 x GPIO (12 bits) 1 x Recovery button 2 x External Antenna Holes (Optional)
Rear I/O	1 x Scrw type DC Jack 1 x RJ45 LAN Port 1 x HDMI 2 x USB 3.2 Gen2x2 2 x External Antenna Holes (Optional)	4 x COM Ports (RS-232/422/485) 1 x 3-pin Terminal block 8 x GbE LAN Ports with PoE 15W/Port 2 x GbE LAN Ports 4 x USB 3.2 Gen 1	4 x COM Ports (RS-232/422/485) 1 x 3-pin Terminal block 8 x GbE LAN Ports with PoE 15W/Port 2 x GbE LAN Ports 4 x USB 3.2 Gen 1
Side I/O	—	4 x External Antenna Holes (Optional)	4 x External Antenna Holes (Optional)
Power	+19VDC	+12V~54VDC (non PoE) +54VDC (PoE support)	+12V~54VDC (non PoE) +54VDC (PoE support)
Operating Temp.	0°C to 40°C	-20°C to 70°C	-20°C to 70°C
Ordering Information	9BQNORN16MR-SI (Box packing)	9BQNXAVNAMR-SI (Box packing)	9BQNNANOAMR-SI (Box packing)
Build in Components	—	—	—

QBiX-Plus Series

New



Model Name	QS-N150A	QBiX-Plus-EHLA6412-A1
Dimension	165W x 105D x 27H (mm)	165W x 105D x 27H (mm)
CPU	Intel® Processor N150 Intel® 7, 4 cores, up to 3.6 GHz	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz
Chipset	—	—
Memory	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Realtek® RTL8118)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics for 10th Intel® Processor 3 x HDMI 2.0 (HDMI 1 & 2 port support CEC) 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Intel® Processor 3 x HDMI 2.0 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	eMMC 64 GB	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3042 M.2 B-key with SIM Slot (USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3042 M.2 B-key with SIM Slot (USB 3.2 Gen 1)
Front I/O	2 x USB 3.2 Gen 1 1 x COM Port (RS-232)(RJ45 Type) 1 x Micro SD card slot 1 x Power button 1 x HDMI	2 x USB 3.2 Gen 1 1 x COM Port (RS-232)(RJ45 Type) 1 x Micro SD card slot 1 x Power button 1 x HDMI
Rear I/O	1 x Headphone Jack 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x HDMI 1 x DC Jack	1 x Headphone Jack 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x HDMI 1 x DC Jack
Side I/O	3 x External Antenna Holes (Optional)	3 x External Antenna Holes (Optional)
TPM	—	—
Power	+12V~19VDC (Adapter 19V/65W)	+12V~19VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	VESA 75/100	VESA 75/100
Ordering Information	6BQSN150AMR-SI (Box packing)	6BQS6412AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Mini Series

Preliminary



New



Model Name	QM-G700A	QM-7433REA-A1
Dimension	112W x 75D x 30.02H (mm)	120W x 80D x 52H (mm)
CPU	MT8390 2x A78 2.2GHz L2 256KB, 6xA55 2.0GHz L2 128KB, shared 2MB L3 cache	Intel® Atom™ x7433RE Processor Intel 7, 4 cores, up to 3.40 GHz
Chipset	—	—
Memory	4 Channels LPDDR4 8GB	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz
Ethernet	PHY, RTL8211FI-CG (10/100/1000 Mbps)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	ARM Mali-G57MC3, OpenGL ES 1.1/2.0/3.2, Vulkan 1.0/1.1	Integrated Graphics Processor - Intel® UHD Graphics 1 x HDMI 2.0
Audio	MT6365_integrated - Audio codec	Realtek® Audio Codec
Storage	eMMC v5.1 64 GB	—
Expansion Slots	1 x 2230 M.2 E-Key (PCIe x1, USB2.0) ; WiFi6: AW-XB468NF (MT7921) (optional) 1 x 3042/3052 M.2 B Key (USB3.0) ; 5G: RM500K-CN (optional)	1 x 2280 M.2 M-Key (PCIe Gen3x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
USB	2 x USB 3.0 ports on the back panel (USB3.0 HUB) 2 x USB 2.0/1.1 ports available through the internal USB headers 1 x OTG USB (USB type C Connector)	—
Front I/O	1 x Headphone Jack 1 x RJ45 LAN Port 2 x USB 3.0 Ports (Host) 1 x USB type C (OTG) 1 x USB 2.0 1 x HDMI 1 x DC in (12~24VDC) 1 x power button	2 x RJ45 LAN Ports 1 x USB 3.2 Gen 2x1 1 x USB 3.2 Gen 1 1 x HDMI 1 x DC IN 1 x Power button 1 x HDD LED 1 x External Antenna Hole (Optional)
Side I/O	1 x Micro SD Slot 6 x External Antenna Holes (optional)	2 x USB 2.0 1 x COM Port (RS-232/422/485) 1 x GPIO (4 bits) 1 x External Antenna Hole (Optional)
TPM	—	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Power	+19VDC (Adapter 19V/65W)	+12VDC (Adapter 12V/48W)
Operating Temp.	-20°C to 60°C	-20°C to 70°C
Mounting	—	Wall mount (Optional) / VESA mount (Optional)
Ordering Information	—	6BQM7433AMR-SI (Box packing)
Built-in Components	—	Please contact with your sales representative for more information or e-mailed to : sales@gigaipc.com

QBiX-Lite Series

Preliminary



Model Name	QBiX-Lite-RPLA1360PH-A1	QBiX-Lite-RPLA1340PH-A1	QBiX-Lite-TGLA1145G7E-A1
Dimension	234W x 155D x 30H (mm)	234W x 155D x 30H (mm)	234W x 155D x 30H (mm)
CPU	Intel® Core™ i7-1360P Processor Intel® 7, 12 cores, 4P+8E, 16 threads, up to 5.0 GHz	Intel® Core™ i5-1340P Processor Intel® 7, 12 cores, 4P+8E, 16 threads, up to 4.6 GHz	Intel® Core™ i5-1145G7E Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.1 GHz
Chipset	SoC	SoC	SoC
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris X® Graphics 2 x HDMI 2.1 2 x DP 1.4 (8K) 1 x DP 1.4 (USB Type C (8K)) 4 independent display outputs	Integrated Graphics Processor - Intel® Iris X® Graphics 2 x HDMI 2.1 2 x DP 1.4 (8K) 1 x DP 1.4 (USB Type C (8K)) 4 independent display outputs	Integrated Graphics Processor - Intel® Iris X® Graphics: 2 x HDMI 2.0 2 x DP 1.4 (8K) 1 x DP 1.4 (USB Type C (8K)) 4 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x 3052/3042 M.2 B-Key with SIM slot (Support 5G)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x 3052/3042 M.2 B-Key with SIM slot (Support 5G)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x 3052 M.2 B-Key with SIM slot (Support 5G)
Front I/O	1 x USB type C (USB 3.2 Gen 2x1, DP Alt Mode & PD Out -30W)(-100W requests to use 250W adapter) 1 x USB type C (USB 3.2 Gen 2x1, PD input-130W) 4 x USB 3.2 Gen 2x1 2 x HDMI 2 x DP 2 x RJ45 LAN Ports 2 x USB 2.0 1 x HDD LED 1 x Power button with LED 2 x External Antenna Holes (Optional)	1 x USB type C (USB 3.2 Gen 2x1, DP Alt Mode & PD Out -30W)(-100W requests to use 250W adapter) 1 x USB type C (USB 3.2 Gen 2x1, PD input-130W) 4 x USB 3.2 Gen 2x1 2 x HDMI 2 x DP 2 x RJ45 LAN Ports 2 x USB 2.0 1 x HDD LED 1 x Power button with LED 2 x External Antenna Holes (Optional)	1 x USB type C (USB 3.2 Gen 2x1, DP Alt Mode & PD Out -30W)(-100W requests to use 250W adapter) 1 x USB type C (USB 3.2 Gen 2x1, PD input-100W) 4 x USB 3.2 Gen 2x1 2 x HDMI 2 x DP 2 x RJ45 LAN Ports 2 x USB 2.0 1 x HDD LED 1 x Power button with LED 2 x External Antenna Holes (Optional)
Rear I/O	1 x COM Port (RS-232) 2 x USB 2.0 1 x Headphone Jack 1 x Screw type DC Jack 2 x External Antenna Holes (Optional)	1 x COM Port (RS-232) 2 x USB 2.0 1 x Headphone Jack 1 x Screw type DC Jack 2 x External Antenna Holes (Optional)	1 x COM Port (RS-232) 2 x USB 2.0 1 x Headphone Jack 1 x Screw type DC Jack 2 x External Antenna Holes (Optional)
Side I/O	1 x External Antenna Hole (on each side)	1 x External Antenna Hole (on each side)	1 x External Antenna Hole (on each side)
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	—
Power	+12V~24VDC (Adapter 19.5V/135W)	+12V~24VDC (Adapter 19.5V/135W)	+12V~24VDC (Adapter 19.5V/135W)
Operating Temp.	0°C to 50°C	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Default)	Wall mount (Default)	Wall mount (Default)
Ordering Information	6BQL1360AMR-SI (Box packing)	6BQL1340AMR-SI (Box packing)	6BQL1145AMR-SI (Box packing)
Built-in Components	—	—	—

QBiX-Lite Series



New



Model Name	QBiX-Lite-TGLA1135G7-A1	QBiX-Lite-AMDA2314H-A1
Dimension	234W x 155D x 30H (mm)	234W x 155D x 30H (mm)
Support model	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz	AMD Ryzen™ R2314 Embedded Processor 14nm, 4 cores, 4 threads, 2.1 GHz, up to 3.5 GHz
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2667 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Realtek® RTL8111H-CG)
Graphic	Integrated Graphics Processor - Intel® Iris X® Graphics: 2 x HDMI 2.0 2 x DP 1.4 (8K) 1 x DP 1.4 (USB Type C (8K)) 4 independent display outputs	Integrated Graphics Processor - AMD® Radeon™ Graphics: 4 x HDMI 2.0 4 independent display outputs EDID Emulation support with AMD utility
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x 2.5" HDD/SSD (SATA 6Gb/s)	1 x 2.5" HDD/SSD (SATA 6Gb/s)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052 M.2 B-Key with SIM Slot (Support 5G)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Front I/O	1 x USB type C (USB 3.2 Gen 2x1, DP Alt Mode & PD Out -30W) (-100W requests to use 250W adapter) 1 x USB type C (USB 3.2 Gen 2x1, PD input-100W) 4 x USB 3.2 Gen 2x1 2 x HDMI 2 x DP 2 x RJ45 LAN Ports 2 x USB 2.0 1 x HDD LED 1 x Power button with LED 2 x External Antenna Holes (Optional)	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0 4 x HDMI 1 x Power button with LED 1 x HDD LED 1 x Screw Type DC Jack
Rear I/O	1 x COM Port (RS-232) 2 x USB 2.0 1 x Headphone Jack 1 x Screw type DC Jack 2 x External Antenna Holes (Optional)	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x USB 2.0 1 x Headphone Jack 2 x External Antenna Holes (Optional)
Side I/O	1 x External Antenna Hole (on each side)	—
TPM	—	Onboard TPM 2.0 security chip INFINEON SLB9665TT2.0
Power	+12V~24VDC (Adapter 19.5V/135W)	+9V~36VDC (Adapter 19V/65W)
Operating Temp.	0°C to 50°C	0°C to 50°C
Mounting	Wall mount (Default)	Wall mount (Default)
Ordering Information	6BQL1135AMR-SI (Box packing)	6BQL2314AMR-SI (Box packing)
Built-in Components	—	—

QBiX-Lite Series



QBiX-Lite Series/ SDM-L Series

Model Name	QBiX-Lite SDM Kits
Dimension	195W x 158D x 30H (mm)
Support model	Support SDM module as follows. SDM-1345EAL SDM-1335AL SDM-1315AL SDM-1185G7EL SDM-1165G7L SDM-1135G7L SDM-1115G4L
Chipset	—
Memory	Depends on SDM module
Ethernet	Depends on SDM module
Graphic	Depends on SDM module
Audio	Intel® Integrated Audio
Storage	Depends on SDM module
Expansion Slots	Depends on SDM module
Front I/O	Depends on SDM module
Rear I/O	1 x USB 3.2 Gen 1 1 x Display Port (Co-lay with front Display port) 1 x HDMI (2 x HDMI for SDM-1185G7EL) 1 x UART 1 x DC-Jack 1 x 2x2 Power connector
Side I/O	—
TPM	—
Power	+12V/19V/24VDC (Adapter 19V/65W) (Adapter 19V/90W for SDM-1165G7L, SDM-1135G7L, SDM-1115G4L) (Adapter 12V/120W for SDM-1185G7EL)
Operating Temp.	0°C to 50°C
Mounting	Wall mount, VESA 75/100 (Optional)
Ordering Information	6BSD4000AMR-SI (Box packing)
Built-in Components	—

SDM-L Series



Model Name	SDM-1345EAL
Dimensions	SDM-Large, 175W x 100D (mm)
CPU	Intel® Core™ i5-1345UE Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.60 GHz
VPro	Intel® vPro™ Platform Eligibility
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz
Ethernet	1 x 2.5GbE LAN Port (Intel® I225LM)
Graphic	Integrated Graphics Processor - Intel® Iris Xe Graphics: 1 x HDMI 2.1 (SDM), 1 x Display Port 1.4a (SDM), 1 x HDMI 2.1 (Rear), 1 x HDMI 2.0 (Rear), 1 x DP 1.4 through USB type C (8k) 4 independent display outputs
Audio	Intel® Integrated Audio
Storage	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	—
Rear I/O	2 x HDMI 1 x RJ45 LAN Port 3 x USB 3.2 Type A Gen 2x1 1 x USB 3.2 Type C Gen 2x1 (with DP output) 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 55°C
Ordering Information	9MRLUCALMR-SI (Box packing)
Built-in Components	—

SDM-L Series



Model Name	SDM-1335AL	SDM-1315AL	SDM-1185G7EL
Dimensions	SDM-Large, 175W x 100D (mm)	SDM-Large, 175W x 100D (mm)	SDM-Large, 175W x 100D (mm)
CPU	Intel® Core™ i5-1335U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.60 GHz	Intel® Core™ i3-1315U Processor Intel® 7, 6 cores, 2P+4E, 8 threads, up to 4.50 GHz	Intel® Core™ i7-1185G7E Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.40 GHz
VPro	Intel® vPro™ Platform Eligibility	—	—
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	16GB LPDDR4x-4267 MT/s (Soldered)
Ethernet	1 x 2.5GbE LAN Port (Intel® I225LM)	1 x 2.5GbE LAN Port (Intel® I225LM)	1 x 2.5GbE LAN Port (Intel® I225LM)
Graphic	Integrated Graphics Processor - Intel® Iris Xe Graphics: 1 x HDMI 2.1 (SDM), 1 x Display Port 1.4a (SDM), 1 x HDMI 2.1 (Rear), 1 x HDMI 2.0 (Rear), 1 x DP 1.4 through USB type C (8k) 4 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics: 1 x HDMI 2.1 (SDM), 1 x Display Port 1.4a (SDM), 1 x HDMI 2.1 (Rear), 1 x HDMI 2.0 (Rear), 1 x DP 1.4 through USB type C (8k) 4 independent display outputs	Integrated Graphics Processor - Intel® Iris X® Graphics: 2 x HDMI 2.1 (SDM), 2 x HDMI 2.0 (Rear), 1 x DP 1.4 through USB type C (8k) 4 independent display outputs
Audio	Intel® Integrated Audio	Intel® Integrated Audio	Intel® Integrated Audio
Storage	—	—	1 x 2280 M.2 M-Key (Support NVME only) Default SSD supplied with 128GB and heatsink
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen 4x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2230 M.2 E-Key (with Intel® AX210 Wi-Fi Card) 1 x 3052 M.2 B-Key (Support 5G)
Internal I/O	—	—	—
Rear I/O	2 x HDMI 1 x RJ45 LAN Port 3 x USB 3.2 Type A Gen 2x1 1 x USB 3.2 Type C Gen 2x1 (with DP output) 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button	2 x HDMI 1 x RJ45 LAN Port 3 x USB 3.2 Type A Gen 2x1 1 x USB 3.2 Type C Gen 2x1 (with DP output) 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button	2 x HDMI 1 x RJ45 LAN Port 2 x USB 3.2 Type A Gen 2x1 1 x USB 3.2 Type C Gen 2x1 (with DP output) 1 x PWR LED 1 x HDD LED 4 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	1 x TPM header (SPI interface)
Operating Temp.	0°C to 55°C	0°C to 55°C	0°C to 55°C
Ordering Information	9MRLU5ALMR-SI (Box packing)	9MRLU3ALMR-SI (Box packing)	9MTGU7BLMR-IA (Box packing)
Built-in Components	—	—	—

SDM-L Series



Model Name	SDM-1165G7L	SDM-1135G7L	SDM-1115G4L
Dimensions	SDM-Large, 175W x 100D (mm)	SDM-Large, 175W x 100D (mm)	SDM-Large, 175W x 100D (mm)
CPU	Intel® Core™ i7-1165G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.70 GHz	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.20 GHz	Intel® Core™ i3-1115G4 Processor 10nm SuperFin, 2 cores, 4 threads, up to 4.10 GHz
VPro	—	—	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	1 x GbE LAN Port (Intel® I219V)	1 x GbE LAN Port (Intel® I219V)	1 x GbE LAN Port (Intel® I219V)
Graphic	Integrated Graphics Processor - Intel® Iris X® Graphics: 1 x HDMI 2.0 (SDM), 2 x HDMI 2.0 (Rear), 1 x DisplayPort (SDM) 4 independent display outputs	Integrated Graphics Processor - Intel® Iris X® Graphics: 1 x HDMI 2.0 (SDM), 2 x HDMI 2.0 (Rear), 1 x DisplayPort (SDM) 4 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics: 1 x HDMI 2.0 (SDM), 2 x HDMI 2.0 (Rear), 1 x DisplayPort (SDM) 4 independent display outputs
Audio	Intel® Integrated Audio	Intel® Integrated Audio	Intel® Integrated Audio
Storage	—	—	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	—	—	—
Rear I/O	2 x HDMI 1 x RJ45 LAN Port 3 x USB 3.2 Gen 1 1 x USB 2.0 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button	2 x HDMI 1 x RJ45 LAN Port 3 x USB 3.2 Gen 1 1 x USB 2.0 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button	2 x HDMI 1 x RJ45 LAN Port 3 x USB 3.2 Gen 1 1 x USB 2.0 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button
TPM	1 x TPM header	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 55°C	0°C to 55°C	0°C to 55°C
Ordering Information	9MTGU7ALMR-SI (Box packing)	9MTGU5ALMR-SI (Box packing)	9MTGU3ALMR-SI (Box packing)
Built-in Components	—	—	—

SDM Docking Board Series



SDM-L Series/ OPS Series

Model Name	CIBPU	CIBPX
Dimensions	190W x 62D (mm)	190W x 54.7D (mm)
Support model	Support SDM module as follows. SDM-1345EAL SDM-1335AL SDM-1315AL SDM-1165G7L SDM-1135G7L SDM-1115G4L	Support SDM module as follows. SDM-1185G7EL
CPU	—	—
VPro	—	—
Memory	—	—
Ethernet	—	—
Graphic	—	—
Audio	—	—
Storage	—	—
Expansion Slots	1 x PCIe x8 slot for SDM-L module 1 x Full-size Mini PCIe (PCIe only)	1 x PCIe x8 slot for SDM-L module 1 x Full-size Mini PCIe (PCIe only)
Internal I/O	2 x I2C 1 x GPIO 1 x UART (TX, RX only)	2 x I2C 1 x GPIO 1 x UART (TX, RX only)
Rear I/O	1 x USB 3.2 Gen 1 1 x Display Port 1 x HDMI 1 x DC-Jack 1 x 2x2 Power connector	1 x USB 3.2 Gen 2x1 2 x HDMI (1 x HDMI support 8K) 1 x DC-Jack 1 x 2x2 Power connector
TPM	—	—
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	—	—
Built-in Components	—	—

OPS Series



Model Name	OPS-H610B
Dimensions	180W x 120D x 30H (mm)
CPU	Support for 13th/12th Generation Intel® Core™ i7/i5/i3, Pentium® and Celeron® processors
Chipset	Intel® H610 Chipset
Memory	1 x DDR4 SO-DIMM sockets, Max. Capacity 16 GB, Support Single Channel DDR4 3200 MHz
Ethernet	1 x GbE LAN Port (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - depends on CPU : 1 x DP 1 independent display output
Audio	Realtek® Audio Codec
Storage	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x4) 1 x 2230 M.2 E-Key
Front I/O	1 x Display Port 1 x RJ45 LAN port 1 x USB 3.2 Type A Gen 1 1 x USB 3.2 Type C Gen 1 1 x Combo Audio Jack (Headphone & Headset) 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button 1 x PWR LED 1 x HDD LED
Rear I/O	1 x 80-pin JAE Tx25 OPS connector
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Power	Power delivery through 80-pin JAE Tx25 OPS connector
Operating Temp.	0°C to 45°C
Ordering Information	6BOPH610BNR-SI (Bulk packing)
Built-in Components	—

ATX Series

Preliminary



Model Name	ATX-Q870A
CPU	Support Intel® Core™ Ultra processors (Series 2)
Socket	LGA 1851
Chipset	Intel® Q870 Chipset
Memory	4 x DDR5 DIMM sockets, Max. Capacity 192 GB, Support Dual Channel DDR5 5600MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226LM and Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0 1 x DP 1.4 1 x VGA 4 independent display outputs
Audio	Realtek® Audio Codec
Storage	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)
Expansion Slots	1 x PCIe x16 (Gen 5x16)(PCIEX16_1) * The PCIEX16_1 slot shares bandwidth with the PCIEX16_2 slot. * The PCIEX16_1 slot operates at up to x8 mode when a device is installed in the PCIEX16_2 slot. 1 x PCIe x16 (Gen 5x8)(PCIEX16_2) 3 x PCIe x4 (Gen 4x4) 2 x PCIe x1 (Gen 4x1) 1 x 2280/2242 M.2 M-Key (PCIe Gen5x4) 1 x 2230 M.2 E-Key (PCIe Gen4x1, USB 2.0)
Internal I/O	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 2 x System fan headers 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x AT/ATX mode select jumper
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C
Ordering Information	9MQ870AXMR-SI (Box packing)

ATX Series



Model Name	ATX-Q670B	ATX-Q670A
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1700	LGA 1700
Chipset	Intel® Q670 Chipset	Intel® Q670 Chipset
Memory	4 x DDR5 DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR5 4800MHz	4 x DDR4 DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR4 3200MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226LM and Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226LM and Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0 1 x DP 1.4b 1 x VGA 4 independent display outputs	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0 1 x DP 1.4b 1 x VGA 4 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)
Expansion Slots	1 x PCIe x16 (Gen 4x16)(PCIEX16_1) * The PCIEX16_1 slot shares bandwidth with the PCIEX16_2 slot. * The PCIEX16_1 slot operates at up to x8 mode when a device is installed in the PCIEX16_2 slot.	1 x PCIe x16 (Gen 4x16)(PCIEX16_1) * The PCIEX16_1 slot shares bandwidth with the PCIEX16_2 slot. * The PCIEX16_1 slot operates at up to x8 mode when a device is installed in the PCIEX16_2 slot.
	1 x PCIe x16 (Gen 4x8)(PCIEX16_2) 2 x PCIe x4 (Gen 3x4) 3 x PCIe x1 (Gen 3x1) 1 x 2280/2242 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s)(M2M_1) 1 x 2280/2242 M.2 M-Key (PCIe Gen4x4)(M2M_2) 1 x 2230 M.2 E-Key	1 x PCIe x16 (Gen 4x8)(PCIEX16_2) 3 x PCIe x4 (Gen 3x4) 2 x PCI 1 x 2280/2242 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s)(M2M_1) 1 x 2280/2242 M.2 M-Key (PCIe Gen4x4)(M2M_2) 1 x 2230 M.2 E-Key
Internal I/O	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 2 x System fan headers 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 2 x System fan headers 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1	3 x Audio Jacks (Line in, Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ670BXM-R-SI (Box packing)	9MQ670AXM-R-SI (Box packing)

Micro-ATX Series

Preliminary



Micro-ATX Series

Model Name	uATX-Q870A
CPU	Support Intel® Core™ Ultra processors (Series 2)
Socket	LGA 1851
Chipset	Intel® Q870 Chipset
Memory	4 x DDR5 DIMM sockets, Max. Capacity 192 GB, Support Dual Channel DDR5 4800/5600/6400 MHz
Ethernet	4 x 2.5GbE LAN Ports (Intel® I226V/226LM)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.1, 1 x DP 2.1, 1 x VGA, 1 x LVDS 4 independent display outputs
Audio	Realtek® Audio Codec
Storage	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)
Expansion Slots	1 x PCIe x16 (Gen 5x16)(PCIEX16_1) * The PCIEX16_1 slot shares bandwidth with the PCIEX16_2 slot. * The PCIEX16_1 slot operates at up to x8 mode when a device is installed in the PCIEX16_2 slot. 1 x PCIe x16 (Gen 5x8)(PCIEX16_2) 1 x PCIe x4 (Gen4 x4) 1 x PCIe x1 (Gen4 x1) 1 x 2280/2242 M.2 M-Key (PCIe Gen x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 2 x System fan header 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 2 x COM header (RS-232/422/485 & RI/5V/12V) 2 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x AT/ATX mode select jumper 1 x VGA header
Rear I/O	1 x HDMI 1 x DisplayPort 4 x RJ45 LAN Ports 8 x USB 3.2 Gen 2x1 4 x USB 2.0
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C
Ordering Information	9MQ870AMMR-SI (Box packing)

Micro-ATX Series



Model Name	uATX-Q670B	uATX-H610B
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1700	LGA 1700
Chipset	Intel® Q670 Chipset	Intel® H610 Chipset
Memory	4 x DDR5 DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR5 4800MHz	2 x DDR5 DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 4800MHz
Ethernet	1 x GbE LAN Port (Intel® I219LM) 1 x 2.5GbE LAN Port (Intel® I226V)	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0, 1 x DP 1.4, 1 x VGA, 1 x LVDS 4 independent display outputs	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0, 1 x DP 1.4, 1 x VGA, 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	6 x SATA 6Gb/s Ports (RAID 0/1/5/10)	4 x SATA 6Gb/s Ports
Expansion Slots	1 x PCIe x16 (Gen 4x16)(PCIEX16_A) * The PCIEX16_A slot shares bandwidth with the PCIEX16_B slot. * The PCIEX16_A slot operates at up to x8 mode when a device is installed in the PCIEX16_B slot. 1 x PCIe x16 (Gen 4x8)(PCIEX16_B) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x1 (Gen3 x1) 1 x 2280/2242 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen4 x16) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x1 (Gen3 x1) 1 x 2280/2242 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 6 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 3 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper 1 x Case open header	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper 1 x Case open header
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 2 x HDMI 1 x DisplayPort 1 x VGA 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1	3 x Audio Jacks (Line in, Line out, Mic in) 2 x HDMI 1 x DisplayPort 1 x VGA 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ670BMMR-SI (Box packing)	9MH610BMMR-SI (Box packing)

Micro-ATX Series



Model Name	uATX-Q670A	uATX-H610A
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1700	LGA 1700
Chipset	Intel® Q670 Chipset	Intel® H610 Chipset
Memory	4 x DDR4 DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR4 3200MHz	2 x DDR4 DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200MHz
Ethernet	1 x GbE LAN Port (Intel® I219LM) 1 x 2.5GbE LAN Port (Intel® I226V)	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0, 1 x DP 1.4, 1 x VGA, 1 x LVDS 4 independent display outputs	Integrated Graphics Processor - depends on CPU: 2 x HDMI 2.0, 1 x DP 1.4, 1 x VGA, 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	6 x SATA 6Gb/s Ports (RAID 0/1/5/10)	4 x SATA 6Gb/s Ports
Expansion Slots	1 x PCIe x16 (Gen 4x16)(PCIEX16_A) * The PCIEX16_A slot shares bandwidth with the PCIEX16_B slot. * The PCIEX16_A slot operates at up to x8 mode when a device is installed in the PCIEX16_B slot. 1 x PCIe x16 (Gen 4x8)(PCIEX16_B) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x1 (Gen3 x1) 1 x 2280/2242 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen4 x16) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x1 (Gen3 x1) 1 x 2280/2242 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 6 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 3 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper 1 x Case open header	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper 1 x Case open header
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 2 x HDMI 1 x DisplayPort 1 x VGA 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1	3 x Audio Jacks (Line in, Line out, Mic in) 2 x HDMI 1 x DisplayPort 1 x VGA 1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1
TPM	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ670AMMR-SI (Box packing)	9MH610AMMR-SI (Box packing)


Micro-ATX Series



Model Name	uATX-W48EA	uATX-Q47EA	uATX-H410A
CPU	Support for 11th/10th Generation Intel® Xeon® W-1200 series, Core™ i3, Pentium® & Celeron® processors	Support for 11th/10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1200	LGA 1200	LGA 1200
Chipset	Intel® W480/W480E Chipset	Intel® Q470E Chipset	Intel® H410 Chipset
Memory	4 x DDR4 DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR4 2933/2666 MHz	4 x DDR4 DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR4 2933/2666 MHz	2 x DDR4 DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz
Ethernet	4 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)	4 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Realtek® RTL8111HS)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 1.4, 1 x DP, 1 x VGA, 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 1.4, 1 x DP, 1 x VGA, 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 1.4, 1 x DVI-D, 1 x VGA 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	6 x SATA 6Gb/s Ports (RAID 0/1/5/10)	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)	4 x SATA 6Gb/s Ports
Expansion Slots	1 x PCIe x16 (Gen 3x16)(PCIEX16_A) * The PCIEX16_A slot shares bandwidth with the PCIEX16_B slot. * The PCIEX16_A slot operates at up to x8 mode when a device is installed in the PCIEX16_B slot.	1 x PCIe x16 (Gen 3x16)(PCIEX16_A) * The PCIEX16_A slot shares bandwidth with the PCIEX16_B slot. * The PCIEX16_A slot operates at up to x8 mode when a device is installed in the PCIEX16_B slot.	1 x PCIe x16 (Gen3 x16) 1 x PCIe x4 (Gen3 x2) 2 x PCIe x1 (Gen3 x1)
	1 x PCIe x16 (Gen 3x8)(PCIEX16_B) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x1 (Gen3 x1) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 2280/2242 M.2 M-Key (PCIe x4, SATA 6Gb/s)	1 x PCIe x16 (Gen 3x8)(PCIEX16_B) 1 x PCIe x4 (Gen3 x4) 1 x PCIe x1 (Gen3 x1) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 2280/2242 M.2 M-Key (PCIe x4, SATA 6Gb/s)	
Internal I/O	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x VGA header 1 x Backlight Control header 1 x AT/ATX mode select jumper 4 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232 & RI/5V/12V) 2 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Buzzer 1 x Clear CMOS jumper	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x VGA header 1 x Backlight Control header 1 x AT/ATX mode select jumper 4 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232 & RI/5V/12V) 2 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Buzzer 1 x Clear CMOS jumper	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 2 x System fan headers 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x Clear CMOS jumper 1 x Buzzer 1 x Case open header
Rear I/O	1 x HDMI 1 x Display Port 4 x RJ45 LAN Ports 8 x USB 3.2 Gen 1, 4 x USB 2.0	1 x HDMI 1 x Display Port 4 x RJ45 LAN Ports 8 x USB 3.2 Gen 1, 4 x USB 2.0	3 x Audio Jacks (Line in, Line out, Mic in) 1 x COM Port (RS-232) 1 x HDMI, 1 x DVI-D, 1 x VGA 2 x RJ45 LAN Ports, 4 x USB 3.2 Gen 1
TPM	1 x TPM header	1 x TPM header	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MW48EAMMR-SI (Box packing)	9MQ47EAMMR-SI (Box packing)	9MH410AMNR-SI (Bulk packing)

Mini-ITX Series

Preliminary



Preliminary



New



Mini-ITX Series

Model Name	mITX-Q870A	mITX-H810A	mITX-H810E
CPU	Support Intel® Core™ Ultra processors (Series 2)	Support Intel® Core™ Ultra processors (Series 2)	Support Intel® Core™ Ultra processors (Series 2)
Socket	LGA 1851	LGA 1851	LGA 1851
Chipset	Intel® Q870 Chipset	Intel® H810 Chipset	Intel® H810 Chipset
Memory	2 x DDR5 SO-DIMM/CSO-DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR5 5600/6400 MHz	2 x DDR5 SO-DIMM/CSO-DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR5 5600/6400 MHz	2 x DDR5 SO-DIMM/CSO-DIMM sockets, Max. Capacity 96 GB, Support Dual Channel DDR5 5600/6400 MHz
Ethernet	1 x 2.5GbE LAN Port (Intel® I226V) 1 x 2.5GbE LAN Port (Intel® I226LM/I219LM)	1 x 2.5GbE LAN Port (Intel® I226V) 1 x 2.5GbE LAN Port (Intel® I226LM/I219LM)	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.1 1 x Display Port 1 x VGA 1 x LVDS 4 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.1 1 x Display Port 1 x VGA 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.1 1 x Display Port 1 x VGA 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	2 x SATA 6Gb/s Ports (RAID 0/1)	2 x SATA 6Gb/s Ports	2 x SATA 6Gb/s Ports
Expansion Slots	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 1 x COM header (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 1 x COM header (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer header 1 x AT/ATX mode select jumper	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 1 x COM header (RS-232/422/485) 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer header 1 x AT/ATX mode select jumper
Rear I/O	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x DisplayPort 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ870AIMR-SI (Box packing)	9MH810AIMR-SI (Box packing)	9MH810EIMR-SI (Box packing)

Mini-ITX Series



Model Name	mITX-Q670A	mITX-H610A	mITX-Q67EB
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors
Socket	LGA 1700	LGA 1700	LGA 1700
Chipset	Intel® Q670 Chipset	Intel® H610 Chipset	Intel® Q670E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	1 x GbE LAN Port (Intel® I219LM) 1 x 2.5GbE LAN Port (Intel® I226V)	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)	1 x GbE LAN Port (Intel® I219LM) 1 x 2.5GbE LAN Port (Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x VGA 1 x LVDS 4 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x VGA 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x VGA 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	2 x SATA 6Gb/s Ports (RAID 0/1)	2 x SATA 6Gb/s Ports	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)
Expansion Slots	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 1 x COM header (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer header 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 1 x COM header (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer header 1 x AT/ATX mode select jumper	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 1 x COM header (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper
Rear I/O	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	1 x TPM header	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ670AIMR-SI (Box packing)	9MH610AIMR-SI (Box packing)	9MQ67EBIMR-SI (Box packing)

Mini-ITX Series



Model Name	mITX-H61EC	mITX-H610E
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors
Socket	LGA 1700	LGA 1700
Chipset	Intel® H610E Chipset	Intel® H610 Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB Support Dual channel DDR5 4800 MHz
Ethernet	6 x 2.5GbE LAN Ports (Intel® I226V)	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x VGA 2 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x DP 1 x VGA 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	2 x SATA 6Gb/s Ports	2 x SATA 6Gb/s Ports
Expansion Slots	1 x PCIe x16 (Gen4 x16) 1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen 3x16) 1 x 2280 M.2 M-Key (PCIe Gen3x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key
Internal I/O	1 x 4-pin ATX main power connector 1 x SATA power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x Buzzer header 1 x AT/ATX mode select jumper	1 x 24-pin ATX main power connector 1 x 8-pin ATX 12V power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W speaker out header (3W optional) 4 x USB 2.0 headers 1 x COM header (RS-232/422/485) 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight control header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper
Rear I/O	2 x Audio Jacks (Line out, Mic in) 1 x HDMI 1 x VGA 6 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V/+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	Onboard TPM 2.0 security chip Infineon SLB9670VQ2.0	Onboard TPM 2.0 security chip Infineon SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MH61ECIMR-SI (Box packing)	9MH610EIMR-SI (Box packing)

Mini-ITX Series



Model Name	mITX-Q47EA	mITX-H42EA	mITX-Q370A
CPU	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 9th/8th Generation Intel® Core™ i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1200	LGA 1200	LGA 1151
Chipset	Intel® Q470E Chipset	Intel® H420E Chipset	Intel® Q370 Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2666/2400 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219LM and Intel® I210AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I210AT)	2 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x VGA 1 x LVDS or eDP 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x VGA 1 x LVDS or eDP 2 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 1.4 1 x Display Port 1 x VGA, 1 x eDP 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	3 x SATA 6Gb/s Ports (RAID 0/1/5/10)	3 x SATA 6Gb/s Ports	3 x SATA 6Gb/s Ports (RAID 0/1/5/10)
Expansion Slots	1 x PCIe x16 (Gen3 x16) 1 x 2280/2242 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen3 x16) 1 x 2280/2242 M.2 M-Key (PCIe x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen3 x16) 1 x 2280/2242 M.2 M-Key (PCIe x4, SATA 6Gb/s, Optane memory) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 1 x COM header (RS-232) 1 x Clear CMOS jumper 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Buzzer 1 x ATX Control header 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 3 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 1 x COM header (RS-232) 1 x Clear CMOS jumper 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x Buzzer 1 x ATX Control header 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 1 x COM header (RS-232) 1 x GPIO (8-bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer 1 x Case open header 1 x AT/ATX mode select jumper
Rear I/O	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 3 x USB 3.2 Gen 1 1 x USB 3.2 Gen 2x1 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)	3 x Audio Jacks (Line in, Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 3 x USB 3.2 Gen 1 1 x USB 3.2 Gen 2x1 1 x DC Jack (+12V/+19V/+24VDC)
TPM	1 x TPM header(LPC)	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ47EAIMR-SI (Box packing)	9MH42EAIMR-SI (Box packing)	9MCQ37AINR-SI (Bulk packing)

Mini-ITX Series



Model Name	mITX-H310A	mITX-6412A
CPU	Support for 9th/8th Generation Intel® Core™ i7/i5/i3, Pentium® & Celeron® processors	Intel® Celeron® J6412 Processor, 10nm, 4 cores, 4 threads, up to 2.6 GHz, fan-less design
Socket	LGA 1151	FCBGA1493
Chipset	Intel® H310 Chipset	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2666/2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 1.4, 1 x Display Port 1 x VGA, 1 x LVDS or eDP 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 1 x HDMI 2.0, 1 x VGA, 1 x LVDS or eDP 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	2 x SATA 6Gb/s Ports	5 x SATA 6Gb/s Ports (4 x Asmedia ASM1064) (1 x supports SATA DOM)
Expansion Slots	1 x PCIe x16 (Gen3 x16) 1 x 2280/2242 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x1 (Gen3 x1) 1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 1 x SATA power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 2 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8-bits) & SMBus header 1 x Backlight Control header 1 x Clear CMOS jumper 1 x Buzzer 1 x ATX Control header 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 3 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Case open header 1 x AT/ATX mode select jumper 1 x Backlight Control header 1 x Buzzer 1 x ATX Control header 4 x SATA LED header
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 1 x VGA 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V/+24VDC)	2 x Audio Jacks (Line out, Mic in) 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 2.0 2 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V/+24VDC)
TPM	1 x TPM header	Onboard TPM 2.0 Infineon SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MH310A1MR-SI (Box packing)	9MEHLJ1A1MR (Box packing)

Mini-ITX Series



Model Name	mITX-4125A	mITX-2748A
CPU	Intel® Celeron® J4125 Processor, 14nm, 4 cores, 4 threads, up to 2.7 GHz, fan-less design	AMD Ryzen™ V2748 Embedded Processor, 7nm, 8 cores, 16 threads, 2.9 GHz, up to 4.25GHz
Socket	FCBGA1090	FP6 BGA
Chipset	—	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR4 2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111HS)	2 x GbE LAN Ports (Realtek® RTL8118-CG)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics 600: 1 x HDMI 2.0, 1 x VGA, 1 x LVDS or eDP 3 independent display outputs	Integrated Graphics Processor - AMD Radeon™ Graphics: 4 x Display Ports 1 x LVDS port (switch from DP) 4 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	5 x SATA 6Gb/s Ports (4 x Marvell 88SE9230, support RAID 0/1/10) (1 x supports SATA DOM)	1 x SATA 6Gb/s Port
Expansion Slots	1 x PCIe x4 (Gen2 x2) 1 x 2280/2260/2242 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (CNVi cards only)	1 x PCIe x16 (Gen3 x8) 1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot
Internal I/O	1 x 4-pin ATX main power connector 3 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 4 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Case open header 1 x AT/ATX mode select jumper 1 x Backlight Control header 1 x RAID LED header 2 x LAN LED headers 1 x Buzzer	1 x 4-pin ATX power connector 1 x SATA power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 2 x COM headers (RS-232/422/485) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x LVDS/ DP Jumper 1 x AT/ATX mode select jumper 1 x ATX Control header 1 x Clear CMOS jumper
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 2.0 2 x USB 3.2 Gen 1 1 x DC Jack (+12VDC)	2 x Audio Jacks (Line out, Mic in) 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 4 x Display Ports 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V~+24VDC)
TPM	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MGMLJAINR-SI (Bulk packing)	Fan version: 9MRZV2MIMR-SI (Box packing)

Thin Mini-ITX Series

Preliminary



Model Name	iTXL-H810A	iTXL-H610A
CPU	Support Intel® Core™ Ultra processors (Series 2)	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1851	LGA 1700
Chipset	Intel® H810 Chipset	Intel® H610 Chipset
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5600/6400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8118-CG)	2 x GbE LAN Ports (Realtek® RTL8118-CG)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.1 1 x Display Port 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio codec	Realtek® Audio codec
Storage	2 x SATA 6Gb/s Ports	2 x SATA 6Gb/s Ports
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 1 x SATA Power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 1 x GPIO (8 bits) & SMBus header 4 x USB 2.0 headers 1 x COM header (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Clear CMOS jumper 1 x Backlight Control header 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 1 x SATA Power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 1 x GPIO (8 bits) & SMBus header 4 x USB 2.0 headers 1 x COM header (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Clear CMOS jumper 1 x Backlight Control header 1 x AT/ATX mode select jumper
Rear I/O	2 x Audio Jacks (Line out, Mic in) 1 x HDMI 1 x Display Port 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x HDMI 1 x Display Port 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)
TPM	Onboard TPM 2.0 Infineon SLB9670VQ2.0	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MH810ATMR-SI (Box packing)	9MH610ATMR-SI (Box packing)

Thin Mini-ITX Series



Model Name	iTXL-Q47EA	iTXL-H42EA
CPU	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors	Support for 10th Generation Intel® Core™ i9/i7/i5/i3, Pentium® & Celeron® processors
Socket	LGA 1200	LGA 1200
Chipset	Intel® Q470E Chipset	Intel® H420E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2933/2666 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219LM and Intel® I210AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I210AT)
Graphic	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x LVDS or eDP 3 independent display outputs	Integrated Graphics Processor - depends on CPU: 1 x HDMI 2.0 1 x Display Port 1 x LVDS or eDP 2 independent display outputs
Audio	Realtek® Audio codec	Realtek® Audio Codec
Storage	4 x SATA 6Gb/s Ports (RAID 0/1/5/10)	4 x SATA 6Gb/s Ports
Expansion Slots	1 x PCIe x16 (Gen3 x8) 1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x PCIe x16 (Gen3 x8) 1 x 2280 M.2 M-Key (PCIe x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 2 x SATA Power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 1 x COM header (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x Backlight Control header 1 x ATX Control header 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 2 x SATA Power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 5 x USB 2.0 headers 1 x COM header (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8 bits) & SMBus header 1 x Clear CMOS jumper 1 x Backlight Control header 1 x ATX Control header 1 x AT/ATX mode select jumper
Rear I/O	2 x Audio Jacks (Line out, Mic in) 1 x HDMI 1 x Display Port 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 1 x HDMI 1 x Display Port 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V~+24VDC)
TPM	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MQ47EATMR-SI (Box packing)	9MH42EATMR-SI (Box packing)

Thin Mini-ITX Series



Thin Mini-ITX Series

Model Name	iTXL-1135G7A/ iTXL-1115G4EA	iTXL-N97A
CPU	Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.90 GHz	Intel® Processor N97 Intel® 7, 4 cores, 6M Cache, up to 3.60 GHz
Socket	FCBGA1449	FCBGA1264
Chipset	—	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	1 x GbE LAN Port (Intel® I219V) 1 x 2.5GbE LAN Port (Intel® I226V)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - Intel® Iris® X* Graphics: 4 x HDMI 2.0 1 x LVDS 1 x eDP 4 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics: 2 x HDMI 2.0 1 x LVDS 1 x eDP 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4 x4, SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x 2230 M.2 E-key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 1 x SATA Power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 4 x USB 2.0 headers 2 x USB 3.2 Gen 1 headers 4 x COM headers (RS-232/422/485 & RI/5V/12V) 1 x 2W Speaker out header 1 x Backlight Control header for eDP 1 x Backlight Control header for LVDS 1 x GPIO (8 bits) & SMBus header 1 x Buzzer 1 x AT/ATX mode select jumper	1 x 4-pin ATX main power connector 1 x SATA Power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 4 x COM headers (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header for eDP 1 x Backlight Control header for LVDS 1 x AT/ATX mode select jumper 1 x ATX control header
Rear I/O	2 x Audio Jacks (Line out, Mic in) 4 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 1 x DC Jack (+12V~+24VDC)	2 x Audio Jacks (Line out, Mic in) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V~+24VDC)
TPM	1 x TPM header	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MTGU5ATMR-SI (Box packing) 9MTGU3ATMR-SI (Box packing)	9MADN9ATMR-SI (Box packing)

Thin Mini-ITX Series



Model Name	iTXL-6412A/ iTXL-6210A
CPU	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz Intel® Celeron® N6210 Processor 10nm, 2 cores, 2 threads, up to 2.6 GHz
Socket	FCBGA1493
Chipset	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8118-CG)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 2 x HDMI 2.0 1 x LVDS or eDP 3 independent display outputs
Audio	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port
Expansion Slots	1 x PCIe x1 (Gen3 x1) 1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin ATX main power connector 1 x SATA Power connector 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 5 x USB 2.0 headers 1 x Buzzer 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232 & RI/5V/12V) 2 x COM headers (RS-232) 1 x GPIO (8 bits) & SMBus header 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x ATX control header
Rear I/O	2 x Audio Jacks (Line out, Mic in) 2 x HDMI 2 x RJ45 LAN Ports 3 x USB 3.2 Gen 1 1 x USB 2.0 1 x DC Jack (+12V/+19~+24VDC)
TPM	—
Operating Temp.	0°C to 60°C
Ordering Information	9MEHLJATMR-SI (Box packing) 9MEHLNATMR-SI (Box packing)

QBiP Series (3.5" SBC)

New



New



Model Name	QBiP-255UB/ QBiP-225UB	QBiP-155UB/ QBiP-125UB
CPU	Intel® Core™ Ultra 7 Processor 255U Intel® 3, 12 cores, 2P+8E+2LPE, 14 threads, up to 5.20 GHz Intel® Core™ Ultra 5 Processor 225U Intel® 3, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.3 GHz	Intel® Core™ Ultra 7 Processor 155U Intel® 4, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.8 GHz Intel® Core™ Ultra 5 Processor 125U Intel® 4, 12 cores, 2P+8E+2LPE, 14 threads, up to 4.3 GHz
Socket	FCBGA2049	FCBGA2049
Chipset	SoC	SoC
Memory	2 x DDR5 SO-DIMM/CSO-DIMM sockets, Max. Capacity 128 GB, Support Dual Channel DDR5 5600/6400 MHz	2 x DDR5 SO-DIMM sockets, Max. Capacity 96 GB, Support Dual Channel DDR5 5600 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V and Intel® I226LM)	2 x 2.5GbE LAN Ports (Intel® I226V and Intel® I226LM)
Graphic	Integrated Graphics Processor - Intel® Graphics: 2 x HDMI 2.1 (HDMI 2 port support CEC) 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® Graphics: 2 x HDMI 2.1 (HDMI 2 port support CEC) 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port (RAID 0/1)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x CANBus header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x CANBus header
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672XU2.0	Onboard TPM 2.0 security chip INFINEON SLB9672XU2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MARU7BSMR-SI (Box packing) 9MARU5BSMR-SI (Box packing)	9MMTU7BSMR-SI (Box packing) 9MMTU5BSMR-SI (Box packing)

QBiP Series (3.5" SBC)



New



Model Name	QBiP-1360A/ QBiP-1340A	QBiP-1365EB/ QBiP-1335EB
CPU	Intel® Core™ i7-1360P Processor Intel® 7, 12 cores, 16 threads, up to 5.0 GHz Intel® Core™ i5-1340P Processor Intel® 7, 12 cores, 16 threads, up to 4.6 GHz	Intel® Core™ i7-1365UE Processor (vPro support) Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.9 GHz Intel® Core™ i5-1335UE Processor (vPro support) Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.5 GHz
Socket	FCBGA1744	FCBGA1744
Chipset	SoC	SoC
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226V and Intel® I226LM)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe Graphics eligible: 2 x HDMI 2.1 2 x DP 1.4b 1 x DP 1.4 (USB Type C (8K)) 1 x eDP 4 independent display outputs	Integrated Graphics Processor - Intel® Iris® Xe Graphics eligible: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port (RAID 0/1)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052/3042 M.2 B-Key (PCIe x1, USB3.0) with SIM Slot (Support 5G only USB interface) 1 x PCIe Gen 4x4 (Board to Wire connector)	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot
Internal I/O	1 x 4-pin box power connector (+12V~24VDC) 1 x SATA Power header 2 x CPU fan headers 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 1 x COM header (RS-232 & RI/5V/12V) 1 x eDP power header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header
Rear I/O	1 x USB type C (USB 3.2 Gen 2x1 + DP output-share with DP) & PD v3.0 Out -100W (Adapter 24V only), PD v3.0 out 60W (Adapter 12V~19V) 1 x USB type C (USB 3.2 Gen 2x1, PD v3.0 input-100W), 4 x USB 3.2 Gen 2x1 2 x HDMI 2 x DP 2 x RJ45 LAN Ports	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MRLP7ASMR-SI (Box packing) 9MRLP5ASMR-SI (Box packing)	9MRLU7CSMR-SI (Box packing) 9MRLU5CSMR-SI (Box packing)

QBiP Series (3.5" SBC)



New



QBiP Series (3.5" SBC)

Model Name	QBiP-1355B/ QBiP-1335B/ QBiP-1315EB	QBiP-1245EB
CPU	Intel® Core™ i7-1355U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 5.0 GHz Intel® Core™ i5-1335U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.6 GHz Intel® Core™ i3-1315UE Processor Intel® 7, 6 cores, 2P+4E, 8 threads, up to 4.5 GHz	Intel® Core™ i5-1245UE Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.4 GHz
Socket	FCBGA1744	FCBGA1744
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x 2.5GbE LAN Ports (Intel® I226V & I226LM)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe/UHD Graphics for 13th Gen Intel® Processors: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® Iris® Xe Graphics eligible : 2 x HDMI 2.0 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port (RAID 0/1)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MRLU7BSMR-SI (Box packing) 9MRLU5BSMR-SI (Box packing) 9MRLU3BSMR-SI (Box packing)	9MADUACSMR-SI (Box Packing)

QBiP Series (3.5" SBC)



Model Name	QBiP-1255A/ QBiP-1235A/ QBiP-1215EA	QBiP-1185G7EB/ QBiP-1145G7EB	QBiP-1165G7A/ QBiP-1135G7A/ QBiP-1115G4EA
CPU	Intel® Core™ i7-1255U Processor Intel® 7, 10 cores, 12 threads, up to 4.7 GHz Intel® Core™ i5-1235U Processor Intel® 7, 10 cores, 12 threads, up to 4.4 GHz Intel® Core™ i3-1215UE Processor Intel® 7, 6 cores, 8 threads, up to 4.4 GHz	Intel® Core™ i7-1185G7E Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.4 GHz, vPro support Intel® Core™ i5-1145G7E Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.1 GHz, vPro support	Intel® Core™ i7-1165G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.7 GHz Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.9 GHz
Socket	FCBGA1744	FCBGA1449	FCBGA1449
Chipset	—	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V)	2 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe/UHD Graphics 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® Iris® X® Graphics 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® Iris® X® /UHD Graphics 2 x HDMI 2.0, 2 x DP 1.4 (8K), 1 x DP 1.4 (USB Type C (8K)), 1 x eDP 4 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port (RAID 0/1)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot 1 x PCIe x1 (Board to Wire connector)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x 3052 M.2 B-Key with SIM Slot (Support 5G) 1 x PCIe x4 (Board to Wire connector)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header	1 x 4-pin box power connector (+9V~48VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x SPI header	1 x 4-pin box power connector (+12V~24VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 1 x COM header (RS-232 & RI/5V/12V) 1 x eDP power header
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x USB type C (USB 3.2 Gen 2x1 + DP output-share with DP) & PD Out -100W 1 x USB type C (USB 3.2 Gen 2x1, PD input-100W), 4 x USB 3.2 Gen 2x1 2 x HDMI, 2 x DP, 2 x RJ45 LAN Ports
TPM	1 x TPM header	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MADU7ASMR-SI (Box packing) 9MADU5ASMR-SI (Box packing) 9MADU3ASMR-SI (Box packing)	9MTGU7DSMR-SI (Box packing) 9MTGU5DSMR-SI (Box packing)	9MTGU7ASMR-SI (Box packing) 9MTGU5ASMR-SI (Box packing) 9MTGU3ASMR-SI (Box packing)

QBiP Series (3.5" SBC)



Model Name	QBiP-1165G7B/ QBiP-1135G7B/ QBiP-1115G4EB	QBiP-8665A/ QBiP-8365A	QBiP-8145A
CPU	Intel® Core™ i7-1165G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.7 GHz (QBiP-1165G7B) Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz (QBiP-1135G7B) Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.9 GHz (QBiP-1115G4EB)	Intel® Core™ i7-8665UE Processor 14nm, 4 cores, 8 threads, up to 4.4 GHz, vPro support (QBiP-8665A) Intel® Core™ i5-8365UE Processor 14nm, 4 cores, 8 threads, up to 4.1 GHz, vPro support (QBiP-8365A)	Intel® Core™ i3-8145UE Processor 14nm, 2 cores, 4 threads, up to 3.9 GHz
Socket	FCBGA1449	FCBGA1528	FCBGA1528
Chipset	SoC	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe /UHD Graphics 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 620: 2 x HDMI 1.4 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 620: 2 x HDMI 1.4 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	2 x SATA 6Gb/s Ports (RAID 0/1/5)	2 x SATA 6Gb/s Ports (RAID 0/1/5)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0) 1 x PCIe x1 (Board to Wire connector)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~48VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x SPI header	1 x 4-pin box power connector (+9V~36VDC) (+48VDC Optional) 2 x SATA power headers 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 3 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header	1 x 4-pin box power connector (+9V~36VDC) (+48VDC Optional) 2 x SATA power headers 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 3 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1
TPM	1 x TPM header	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MTGU7BSMR-SI (Box packing) 9MTGU5BSMR-SI (Box packing) 9MTGU3BSMR-SI (Box packing)	9MWHLUDSMR-SI (Box packing) 9MWHLUESMR-SI (Box packing)	9MWHLUCSMR-SI (Box packing)

QBiP Series (3.5" SBC)



Model Name	QBiP-7600A/ QBiP-7200A/ QBiP-7100A	QBiP-3965A
CPU	Intel® Core™ i7-7600U Processor 14nm, 2 cores, 4 threads, up to 3.9 GHz, vPro support (QBiP-7600A) Intel® Core™ i5-7200U Processor 14nm, 2 cores, 4 threads, up to 3.1 GHz (QBiP-7200A) Intel® Core™ i3-7100U Processor 14nm, 2 cores, 4 threads, 2.4 GHz (QBiP-7100A)	Intel® Celeron® 3965U Processor 14nm, 2 cores, 2 threads, 2.2 GHz
Socket	FCBGA1356	FCBGA1356
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2133 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 2133 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT) (7600A: Intel® I219LM and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics 620: 1 x HDMI 2.0 1 x Display Port 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 610: 1 x HDMI 2.0 1 x Display Port 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	2 x SATA 6Gb/s Ports (RAID 0/1/5)	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 2 x SATA power headers 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 3 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 3 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 1 x HDMI 1 x Display Port 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MFLP7BSMR-SI (Box packing) (QBiP-7600A) 9MFLP5ASMR-SI (Box packing) (QBiP-7200A) 9MFLP3ASMR-SI (Box packing) (QBiP-7100A)	9MFLPCASMR-SI (Box packing)

QBiP Series (3.5" SBC)

New



Preliminary



Model Name	QBiP-x7433REA	QBiP-N150A	QBiP-N97A
CPU	Intel® Atom® x7433RE Processor Intel® 7, 4 cores, up to 3.40 GHz	Intel® Processor N150 Intel® 7, 4 cores, up to 3.60 GHz	Intel® Processor N97 Intel® 7, 4 cores, up to 3.60 GHz
Socket	FCBGA1264	FCBGA1264	FCBGA1264
Chipset	—	—	—
Memory	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz
Ethernet	2 x 2.5GbE LAN ports (Intel® I225V)	2 x 2.5GbE LAN ports (Intel® I226V)	2 x 2.5GbE LAN ports (Intel® I225V)
Graphic	Integrated Graphics Processor - Intel UHD Graphics: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel Graphics: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel UHD Graphics: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x2) 1 x Full-size mini PCIe with SIM slot 1 x 2230 M.2 E-Key (PCIe x1, USB2.0)	1 x 2280 M.2 M-Key (PCIe x2) 1 x Full-size mini PCIe with SIM slot 1 x 2230 M.2 E-Key (PCIe x1, USB2.0)	1 x 2280 M.2 M-Key (PCIe x2) 1 x Full-size mini PCIe with SIM slot 1 x 2230 M.2 E-Key (PCIe x1, USB2.0)
Internal I/O	1 x 4-pin box power connector (+12V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+12V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+12V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MASLEASMR-SI (Box packing)	9MTWN1ASMR-SI (Box packing)	9MADN9ASMR-SI (Box packing)

QBiP Series (3.5" SBC)



Model Name	QBiP-x6413EA	QBiP-6412A/ QBiP-6210A
CPU	Intel® Atom® x6413E Processor 10nm, 4 cores, 4 threads, up to 3.0 GHz	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz Intel® Celeron® N6210 Processor 10nm, 2 cores, 2 threads, up to 2.6 GHz
Socket	FCBGA1493	FCBGA1493
Chipset	—	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Intel® I210AT)	2 x GbE LAN Ports (Intel® I210AT)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIex2, SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIex2, SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+12V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	—	—
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MEHLEASMR-SI (Box packing)	9MEHLJASMR-SI (Box packing) (QBiP-6412A) 9MEHLNASMR-SI (Box packing) (QBiP-6210A)

QBiP Series (3.5" SBC)



Model Name	QBiP-4200B/ QBiP-4200C/ QBiP-3350A	QBiP-4200D/ QBiP-4200E/ QBiP-3350B
CPU	Intel® Pentium® N4200 Processor 14nm, 4 cores, 4 threads, up to 2.5 GHz (QBiP-4200B/4200C) Intel® Celeron® N3350 Processor 14nm, 2 cores, 2 threads, up to 2.4 GHz (QBiP-3350A)	Intel® Pentium® N4200 Processor 14nm, 4 cores, 4 threads, up to 2.5 GHz (QBiP-4200B/4200C) Intel® Celeron® N3350 Processor 14nm, 2 cores, 2 threads, up to 2.4 GHz (QBiP-3350A)
Socket	FCBGA1296	FCBGA1296
Chipset	SoC	SoC
Memory	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz
Ethernet	2 x GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - Intel® HD Graphics 505: 1 x HDMI 1.4 1 x VGA 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 505: 1 x HDMI 1.4 1 x VGA 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port 1 x eMMC 32GB (4200B only)	1 x SATA 6Gb/s Port 1 x eMMC 32GB (4200D only)
Expansion Slots	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1
TPM	1 x TPM header	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MZAPLCMR-SI (Box packing) (QBiP-4200B) 9MZAPLDSMR-SI (Box packing) (QBiP-4200C) 9MZAPLESMD-SI (Box packing) (QBiP-3350A)	9MAPLNASMR-SI (Box packing) (QBiP-4200D) 9MAPLNBMSMR-SI (Box packing) (QBiP-4200E) 9MAPLNCSMR-SI (Box packing) (QBiP-3350B)

QBiP Series (3.5" SBC)



Model Name	QBiP-E3940A	QBiP-E3940B	QBiP-1900A
CPU	Intel® Atom® x5-E3940 Processor 14nm, 4 cores, 4 threads, up to 1.8 GHz 2M Cache	Intel® Atom® x5-E3940 Processor 14nm, 4 cores, 4 threads, up to 1.8 GHz 2M Cache	Intel® Celeron® J1900 Processor 22nm, 4 cores, 4 threads, up to 2.42 GHz
Socket	FCBGA1296	FCBGA1296	FCBGA1170
Chipset	SoC	SoC	SoC
Memory	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual channel DDR3L 1866 MHz	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual channel DDR3L 1866 MHz	1 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Single channel DDR3L 1333 MHz
Ethernet	2 x GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® HD Graphics 500: 1 x HDMI 1.4 1 x VGA 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 500: 1 x HDMI 1.4 1 x VGA 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 500: 1 x HDMI 1.4 1 x VGA 1 x LVDS 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port	1 x SATA 3Gb/s Port
Expansion Slots	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB2.0) -- support 3G module	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB2.0) -- support 3G module	1 x 2280 M.2 M-Key (SATA 3Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC Full Range) 1 x SATA Power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+9V~36VDC Full Range) 1 x SATA Power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (DC in +9V~36VDC) (+48VDC Optional) 1 x SATA Power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 2 x COM headers (RS-232) 1 x COM header (RS-232/422/485) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 1 x USB 2.0 1 x USB 3.2 Gen 1
TPM	1 x TPM Header	1 x TPM Header	1 x TPM Header
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MAPLKASMR-SI (Box Packing)	9MAPLEASMR-SI (Box Packing)	9MBAYTASMR-SI (Box Packing)

QBiP Series (3.5" SBC)



Model Name	QBiP-2314A
CPU	AMD® Ryzen™ R2314 Embedded Processor 14nm, 4 cores, 4 threads, 2.1 GHz, up to 3.5 GHz
Socket	FP5
Chipset	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2667 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H-CG)
Graphic	Integrated Graphics Processor - AMD® Radeon™ Graphics: 4 x HDMI 2.0 1 x eDP (share from HDMI) 4 independent display outputs
Audio	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 2 x COM headers (RS-232) 1 x COM header (RS-232/422/485) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header
Rear I/O	4 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9665TT2.0
Operating Temp.	0°C to 60°C
Ordering Information	9MRZR2MSMR-SI (Box packing)

QBiP Wide Temperature Series

New



Model Name	QBiP-1365EBT/ QBiP-1335EBT	QBiP-1185G7EBT/ QBiP-1145G7EBT	QBiP-1115G4EBT
CPU	Intel® Core™ i7-1365UE Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.9 GHz (vPro support) Intel® Core™ i5-1335UE Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.5 GHz (vPro support)	Intel® Core™ i7-1185G7E Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.4 GHz, vPro support Intel® Core™ i5-1145G7E Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.1 GHz, vPro support	Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.90 GHz
Socket	FCBGA1744	FCBGA1449	FCBGA1449
Chipset	SoC	—	—
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual channel DDR4 3200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN Ports (Intel® I226V and Intel® I226LM)	2 x GbE LAN Ports (Intel® I219LM and Intel® I211AT)	2 x GbE LAN Ports (Intel® I219V and Intel® I211AT)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe Graphics eligible: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® Iris® X® Graphics: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics: 1 x HDMI 2.0 1 x Display Port 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port (RAID 0/1)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0) 1 x Full-size Mini PCIe with SIM slot	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot 1 x PCIe x1 (Board to Wire connector, PCIe Gen3 x1)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key 1 x Full-size Mini PCIe with SIM slot 1 x PCIe x1 (Board to Wire connector, PCIe Gen3 x1)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header	1 x 4-pin box power connector (DC in +9V~48VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x SPI header	1 x 4-pin box power connector (DC in +9V~48VDC) 1 x SATA Power header 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232/422/485) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8-bits) & SMBus header 1 x SPI header
Rear I/O	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1	1 x COM Port (RS-232/422/485 & RI/5V/12V) 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 2x1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0	1 x TPM header	1 x TPM header
Operating Temp.	-20°C to 70°C	-20°C to 70°C	-20°C to 70°C
Ordering Information	9MRLU7CSMT-SI1 (Box Packing) 9MRLU5CSMT-SI1 (Box Packing)	9MTGU7DSMR-SI1 (Box Packing) 9MTGU5DSMR-SI1 (Box Packing)	9MTGU3BSMR-SI1 (Box Packing)

QBiP Wide Temperature Series

New



Model Name	QBiP-x7433REAT	QBiP-x6413EAT
CPU	Intel® Atom® x7433RE Processor Intel® 7, 4 cores, up to 3.40 GHz	Intel® Atom® x6413E Processor 10nm, 4 cores, 4 threads, up to 3.0 GHz
Socket	FCBGA1264	FCBGA1493
Chipset	—	—
Memory	1 x DDR5 SO-DIMM sockets, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB, Support Dual channel DDR4 3200 MHz
Ethernet	2 x 2.5GbE LAN ports (Intel® I225V)	2 x GbE LAN Ports (Intel® I210AT)
Graphic	Integrated Graphics Processor - Intel UHD Graphics: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 2 x HDMI 2.0 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen3x2) 1 x Full-size mini PCIe with SIM slot 1 x 2230 M.2 E-Key (PCIe x1, USB2.0)	1 x 2280 M.2 M-Key (PCIex2, SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+12V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 2 x USB 2.0 headers 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x COM header (RS-232/422/485) 2 x COM headers (RS-232) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 2 x USB 2.0	1 x Headphone Jack 2 x HDMI 2 x RJ45 LAN Ports 4 x USB 3.2 Gen 1
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	—
Operating Temp.	-40°C to 85°C	-40°C to 85°C
Ordering Information	9MASLEASMR-SI1 (Box packing)	9MEHLEASMR-SI1 (Box packing)

QBiP Wide Temperature Series



Model Name	QBiP-E3940AT	QBiP-E3940BT
CPU	Intel® Atom® x5-E3940 Processor 14nm, 4 cores, 4 threads, up to 1.8 GHz	Intel® Atom® x5-E3940 Processor 14nm, 4 cores, 4 threads, up to 1.8 GHz
Socket	FCBGA1296	FCBGA1296
Chipset	SoC	SoC
Memory	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz	2 x DDR3L SO-DIMM sockets, Max. Capacity 8 GB, Support Dual Channel DDR3L 1866 MHz
Ethernet	2 x GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - Intel® HD Graphics 500: 1 x HDMI 1.4 1 x VGA 1 x LVDS 3 independent display outputs	Integrated Graphics Processor - Intel® HD Graphics 500: 1 x HDMI 1.4 1 x VGA 1 x LVDS 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)	1 x 2242 M.2 M-Key (SATA 6Gb/s) 1 x Full-size Mini PCIe with SIM slot (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header	1 x 4-pin box power connector (+9V~36VDC) 1 x SATA power header 1 x System fan header 1 x Front panel header 1 x 2W Speaker out header 4 x USB 2.0 headers 3 x COM headers (RS-232) 1 x COM header (RS-232/422/485 & RI/5V/12V) 1 x Backlight Control header 1 x AT/ATX mode select jumper 1 x GPIO (8 bits) & SMBus header 1 x Buzzer header
Rear I/O	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1	1 x Headphone Jack 1 x HDMI 1 x VGA 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1
TPM	1 x TPM header	1 x TPM header
Operating Temp.	-40°C to 85°C	-40°C to 85°C
Ordering Information	9MAPLKASMR-SI1 (Box packing)	9MAPLEASMR-SI1 (Box Packing)

QBi Series (10 x 10 Embedded Compact Board)



QBi Series (10 x 10 Embedded Compact Board)

Model Name	QBi-1355A/ QBi-1335A/ QBi-1315EA	QBi-1165G7A/ QBi-1135G7A/ QBi-1115G4EA
CPU	Intel® Core™ i7-1355U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 5.0 GHz (QBi-1355A) Intel® Core™ i5-1335U Processor Intel® 7, 10 cores, 2P+8E, 12 threads, up to 4.6 GHz (QBi-1335A) Intel® Core™ i3-1315UE Processor Intel® 7, 6 cores, 2P+4E, 8 threads, up to 4.5 GHz (QBi-1315EA)	Intel® Core™ i7-1165G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.7 GHz (QBi-1165G7A) Intel® Core™ i5-1135G7 Processor 10nm SuperFin, 4 cores, 8 threads, up to 4.2 GHz (QBi-1135G7A) Intel® Core™ i3-1115G4E Processor 10nm SuperFin, 2 cores, 4 threads, up to 3.90 GHz (QBi-1115G4EA)
Socket	FCBGA1774	FCBGA1449
Chipset	SoC	SoC
Memory	2 x DDR5 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR5 5200 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 3200 MHz
Ethernet	1 x 2.5 GbE LAN port (Intel® I226V) 1 x GbE LAN port (Realtek® RTL8111H)	2 x GbE LAN Ports (Intel® I219V and Realtek® RTL8118-CG)
Graphic	Integrated Graphics Processor - Intel® Iris® Xe Graphics eligible/UHD Graphics for 13th Gen Intel® Processors: 2 x HDMI 2.0 1 x DP 1.4 through USB Type C (DP Alt. mode) 3 independent display outputs	Integrated Graphics Processor - Intel® Iris® Xe® /UHD Graphics: 2 x HDMI 2.0 2 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 4x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 2-pin power connector 1 x CPU fan header 1 x Front panel header 1 x USB 2.0 header 1 x SATA Power header	1 x 2-pin power connector 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x USB 2.0 header
Front IO	2 x USB 3.2 Gen 2x1 1 x USB 3.2 Type C Gen 2x1 (with DP Alt. mode) 1 x Power button 1 x COM Port (RS-232/422/485) 1 x Combo audio jack (Headphone & Headset)	2 x USB 3.2 Gen 2x1 1 x Power button 1 x COM Port (RS-232/422/485)
Rear IO	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+12V~24VDC)	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+9V~48VDC)
Side IO	—	—
TPM	Onboard TPM 2.0 security chip INFINEON SLB9672VU2.0	1 x TPM header
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MRLU7AHMR-SI (Box packing) (QBi-1355A) 9MRLU5AHMR-SI (Box packing) (QBi-1335A) 9MRLU3AHMR-SI (Box packing) (QBi-1315EA)	9MTGU7AHMR-SI (Box packing) (QBi-1165G7A) 9MTGU5AHMR-SI (Box packing) (QBi-1135G7A) 9MTGU3AHMR-SI (Box packing) (QBi-1115G4EA)

QBi Series (10 x 10 Embedded Compact Board)



Model Name	QBi-8665A/ QBi-8365A	QBi-8145A
CPU	Intel® Core™ i7-8665UE Processor 14nm, 4 cores, 8 threads, up to 4.4 GHz, vPro support (QBi-8665A) Intel® Core™ i5-8365UE Processor 14nm, 4 cores, 8 threads, up to 4.1 GHz, vPro support (QBi-8365A)	Intel® Core™ i3-8145UE Processor 14nm, 2 cores, 4 threads, up to 3.9 GHz
Socket	FCBGA1528	FCBGA1528
Chipset	SoC	SoC
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz	2 x DDR4 SO-DIMM sockets, Max. Capacity 64 GB, Support Dual Channel DDR4 2400 MHz
Ethernet	2 x GbE LAN Ports (Intel® I219LM and Realtek® RTL8111HS)	2 x GbE LAN Ports (Intel® I219V and Realtek® RTL8111HS)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics 620: 2 x HDMI 1.4 1 x eDP 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 620: 2 x HDMI 1.4 1 x eDP 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port (RAID 0/1)	1 x SATA 6Gb/s Port (RAID 0/1)
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 2-pin power connector 1 x SATA/eDP Power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x USB 2.0 header 1 x Vertical USB 3.2 Gen 1	1 x 2-pin power connector 1 x SATA/eDP power header 1 x CPU fan header 1 x Front panel header 1 x Front panel audio header 1 x USB 2.0 header 1 x Vertical USB 3.2 Gen 1
Front IO	2 x USB 3.2 Gen 2x1 1 x Power button 1 x COM Port (RS-232/422/485)	2 x USB 3.2 Gen 2x1 1 x Power button 1 x COM Port (RS-232/422/485)
Rear IO	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+9V~36VDC)	2 x HDMI 2 x RJ45 LAN Ports 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+9V~36VDC)
Side IO	—	—
TPM	1 x TPM header (LPC)	1 x TPM header (LPC)
Operating Temp.	0°C to 60°C	0°C to 60°C
Ordering Information	9MWHLUDHMR-SI (Box packing) (QBi-8665A) 9MWHLUEHMR-SI (Box packing) (QBi-8365A)	9MWHLUCHMR-SI (Box packing)

QBi Series (10 x 10 Embedded Compact Board)

Preliminary



Model Name	QBi-N150A	QBi-N97A	QBi-N97B
CPU	Intel® Processor N150 Intel 7, 4 cores, up to 3.60 GHz	Intel® Processor N97 Intel 7, 4 cores, up to 3.60 GHz	Intel® Processor N97 Intel 7, 4 cores, up to 3.60 GHz
Socket	FCBGA1264	FCBGA1264	FCBGA1264
Chipset	SoC	SoC	SoC
Memory	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB Support Single Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB Support Single Channel DDR5 4800 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 16 GB Support Single Channel DDR4 3200 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics support: 2 x HDMI 2.0 port 1 x DP 1.4 through USB Type C (DP Alt. mode) 3 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics support: 2 x HDMI 2.0 port 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics support: 3 x HDMI 2.0 port 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen 3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen 3x1, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 2-pin power connector 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 2 x USB 2.0 headers	1 x 2-pin power connector 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 2 x USB 2.0 headers	1 x 2-pin power connector 1 x SATA Power header 1 x CPU fan header 1 x Front panel header 1 x Speaker out header 2 x USB 2.0 headers
Front IO	2 x USB 3.2 Gen 2x1 1 x Power button with LED 1 x COM Port (RS-232) 1 x Combo audio jack (Headphone & Headset) 1 x USB Type C	2 x USB 3.2 Gen 2x1 1 x Power button with LED 1 x COM Port (RS-232) 1 x Combo audio jack (Headphone & Headset)	2 x USB 3.2 Gen 2x1 1 x Power button with LED 1 x COM Port (RS-232) 1 x Combo audio jack (Headphone & Headset) 1 x HDMI
Rear IO	2 x RJ45 LAN Ports 2 x HDMI 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+12V~19VDC)	2 x RJ45 LAN Ports 2 x HDMI 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+12V~19VDC)	2 x RJ45 LAN Ports 2 x HDMI 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+12V~24VDC)
Side IO	—	—	—
TPM	Onboard TPM 2.0 security chip NUVOTON NPCT760AABYX	Onboard TPM 2.0 security chip NUVOTON NPCT760AABYX	Onboard TPM 2.0 security chip NUVOTON NPCT760AABYX
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MTWN1AHMR-SI (Box Packing)	9MADN9AHMR-SI (Box Packing)	9MADN9BHMR-SI (Box Packing)


QBi Series (10 x 10 Embedded Compact Board)



Model Name	QBi-6412A/ QBi-6210A	QBi-6412B	QBi-4125A
CPU	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz (QBi-6412A) Intel® Celeron® N6210 Processor 10nm, 2 cores, 2 threads, up to 2.6 GHz (QBi-6210A)	Intel® Celeron® J6412 Processor 10nm, 4 cores, 4 threads, up to 2.6 GHz	Intel® Celeron® J4125 Processor 14nm, 4 cores, 4 threads, up to 2.7 GHz
Socket	FCBGA1493	FCBGA1493	FCBGA1090
Chipset	SoC	SoC	SoC
Memory	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Single Channel DDR4 3200 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 32 GB, Support Single Channel DDR4 3200 MHz	1 x DDR4 SO-DIMM socket, Max. Capacity 8 GB, Support Single Channel DDR4 2400 MHz
Ethernet	2 x GbE LAN Ports (Intel® I211AT)	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Intel® I211AT and Realtek® RTL8111HS)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics for 10th Gen Intel® Processors: 2 x HDMI 2.0 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics 600: 2 x HDMI 1.4 1 x eDP 3 independent display outputs
Audio	Realtek® Audio Codec	Realtek® Audio Codec	Realtek® Audio Codec
Storage	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port	1 x SATA 6Gb/s Port
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe x2, SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (SATA 6Gb/s) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 2-pin power connector 1 x SATA power header 1 x CPU fan header 1 x Front panel header 2 x USB 2.0 headers	1 x 2-pin power connector 1 x SATA power header 1 x CPU fan header 1 x Front panel header 2 x USB 2.0 headers	1 x SATA power header 1 x CPU fan header 1 x power button header 2 x USB 2.0 headers 1 x Speaker out header
Front IO	2 x USB 3.2 Gen 2x1 1 x Power button 1 x COM Port (RS-232) 1 x Combo Audio Jack (Headphone & Headset)	2 x USB 3.2 Gen 2x1 1 x COM Port (RS-232) 1 x Combo Audio Jack (Headphone & Headset) 1 x Power button	2 x USB 3.2 Gen 1 1 x COM Port (RS-232) 1 x Headphone Jack 1 x Power button
Rear IO	2 x RJ45 LAN Ports 2 x HDMI 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+12V~19VDC)	2 x RJ45 LAN Ports 2 x HDMI 2 x USB 3.2 Gen 2x1 1 x Screw type DC Jack (+12V~19VDC)	2 x RJ45 LAN Ports 2 x USB 3.2 Gen 1 2 x HDMI 1 x DC Jack (+12V~19VDC)
Side IO	—	—	—
TPM	—	Onboard TPM 2.0 security chip Infineon SLB9670VQ2.0	—
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MEHLJAHMR-SI (Box packing) 9MEHLNAHMR-SI (Box packing)	9MEHLJBHMR-SI (Box packing)	9MGMLKAHMR-SI (Box packing)

Pico-ITX Series

Preliminary



New



Model Name	PICO-G700	PICO-x7433REA
CPU	MT8390 2x A78 2.2GHz L2 256KB, 6xA55 2.0GHz L2 128KB, shared 2MB L3 cache	Intel® Atom™ x7433RE Processor Intel® 7, 4 cores, up to 3.40 GHz
Socket	—	FCBGA1264
Package	15.1x 15.1mm FCCSP, 0.4mm Pitch, 1204 Pin Count, TSMC 6nm	—
Memory	4 Channels LPDDR4 8GB	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB Support Single Channel DDR5 4800 MHz
Ethernet	PHY RTL8211FI-CG (10/100/1000 Mbps)	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	HDMI 2.0 eDP (2x Lan) MIPI-DSI (DSI 7" 1200*1920) (Optional)	Integrated Graphics Processor - Intel® UHD Graphics support: 1 x HDMI 2.0 1 x LVDS 2 independent display outputs
Audio	MT6365 (Integrated)	—
Storage	eMMC v5.1 64GB	—
Expansion Slots	2230 M.2 E-key (PCIe x1, USB2.0) WIFI6 : AW-XB468NF (IC:MT7921L) 3042/3052 M.2 B-Key (USB3.0) 5G : RM500K-CN	1 x 2280 M.2 M-Key (PCIe Gen3x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
USB	2 x USB 3.0 ports on the back panel (USB3.0 HUB) 2 x USB 2.0/1.1 ports available through the internal USB headers 1 x OTG USB (USB type C Connector)	—
Internal I/O	1 x Front panel header 1 x Speaker header (2W/4ohm) 2 x UART 1 x GPIO (8 bits) header 1 x MIPI-DSI 2 x I2C (Touch & BLK) 1 x DC in (box header) 1 x power button	1 x 4-pin box power connector (+12VDC) 1 x Front panel header 1 x COM header (RS-232/422/485) 2 x USB 2.0 headers 1 x GPIO (4-bits) header 1 x Backlight Control header
Rear I/O	1 x DC In power jack --System adapter 12~24V 2 x USB 3.0 ports (Host) 1 x USB type C (OTG) 1 x RJ-45 port 1 x Micro SD Slot 1 x HDMI 1 x Audio Jack	1 x USB 3.2 Gen 1 1 x USB 3.2 Gen 2x1 2 x RJ45 LAN Ports 1 x HDMI
TPM	—	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	-20°C to 60°C	-20°C to 70°C
Ordering Information	9MG700UJMR-SI (Box packing)	9MASLEAJMR-SI (Box packing)

Pico-ITX Series

Preliminary



Model Name	PICO-N150A	PICO-N97A	PICO-G350A PICO-G350B
CPU	Intel® Processor N150 Intel® 7, 4 cores, up to 3.6 GHz	Intel® Processor N97 Intel® 7, 4 cores, up to 3.60 GHz	MT8365 Arm® Quad-Core Cortex®-A53 up to 2.0GHz
Socket	FCBGA1264	FCBGA1264	—
Package	—	—	—
Memory	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB, Support Single Channel DDR5 4800 MHz	LPDDR4X 4GB (on board)
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H)	2 x GbE LAN Ports (Realtek® RTL8111H)	Integrated 100M Ethernet
Graphic	Integrated Graphics Processor - Intel® UHD Graphics support: 1 x HDMI 2.0 1 x LVDS 2 independent display outputs	Integrated Graphics Processor - Intel® UHD Graphics support: 1 x HDMI 2.0 1 x LVDS 2 independent display outputs	Integrated Graphics Processor – Mali-G52: 1 x HDMI 1 x LVDS (Optional) 1 x MIPI-DSI (Optional)
Audio	—	—	Integrated - Audio codec and amplifier
Storage	—	—	eMMC 8GB (on board) - For PICO-G350A, support Yocto OS eMMC 32GB (on board) - For PICO-G350B, support Android OS
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen 3x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2280 M.2 M-Key (PCIe Gen 3x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)	1 x 2230 M.2 E-Key, support AW- CB451NF-D (IEEE 802.11a/b/g/n/ac Wireless LAN 2T2R and Bluetooth 5.1 Combo Module)
Internal I/O	1 x 4-pin box power connector (+12VDC) 1 x Front panel header 1 x COM header (RS-232/422/485) 2 x USB 2.0 headers 1 x GPIO (4-bits) header 1 x Backlight Control header	1 x 4-pin box power connector (+12VDC) 1 x Front panel header 1 x COM header (RS-232/422/485) 2 x USB 2.0 headers 1 x GPIO (4-bits) header 1 x Backlight Control header	1 x Front panel header 1 x Front audio header 1 x Speaker header (2W/4ohm) 2 x UART 2 x USB 2.0 headers (host) 1 x USB 2.0 header (OTG) 1 x GPIO (8 bits) header 1 x MIPI-DSI (optional) 1 x Micro SD Slot
Front I/O	—	—	1 x OTG USB (Internal micro-USB connector)
Rear I/O	2 x USB 3.2 Gen 2x1 2 x RJ45 LAN Ports 1 x HDMI	2 x USB 3.2 Gen 2x1 2 x RJ45 LAN Ports 1 x HDMI	1 x DC In power Jack - System adapter 12~24V 2 x USB 2.0 Ports (Host) 1 x RJ45 LAN Port 1 x HDMI
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0	—
Operating Temp.	0°C to 60°C	0°C to 60°C	0°C to 60°C
Ordering Information	9MTWN1AJMR-SI (Box packing)	9MADN9AJMR-SI (Box packing)	9MI350AJMR-SI (Box packing), including 8G eMMC, support Yocto OS (PICO-G350A) 9MI350BJMR-SI (Box packing), including 32G eMMC, support Android OS (PICO-G350B)

Pico-ITX Wide Temperature Series

New



Model Name	PICO-x7433REAT
CPU	Intel® Atom™ x7433RE Processor Intel® 7, 4 cores, up to 3.40 GHz
Socket	FCBGA1264
Package	—
Memory	1 x DDR5 SO-DIMM socket, Max. Capacity 16 GB Support Single Channel DDR5 4800 MHz
Ethernet	2 x GbE LAN Ports (Realtek® RTL8111H)
Graphic	Integrated Graphics Processor - Intel® UHD Graphics support: 1 x HDMI 2.0 1 x LVDS 2 independent display outputs
Audio	—
Storage	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen3x2) 1 x 2230 M.2 E-Key (PCIe x1, USB 2.0)
Internal I/O	1 x 4-pin box power connector (+12VDC) 1 x Front panel header 1 x COM header (RS-232/422/485) 2 x USB 2.0 headers 1 x GPIO (4-bits) header 1 x Backlight Control header
Rear I/O	1 x USB 3.2 Gen 1 1 x USB 3.2 Gen 2x1 2 x RJ45 LAN Ports 1 x HDMI
TPM	Onboard TPM 2.0 security chip INFINEON SLB9670VQ2.0
Operating Temp.	-40°C to 85°C
Ordering Information	9MASLEAJMT-SI1 (Box packing)

Lined area for notes, consisting of multiple horizontal lines.



Lined area for writing a memo, consisting of horizontal lines.



Lined area for notes, consisting of multiple horizontal lines.

Building a Smarter Tomorrow

GIGAIPC™



GMKT-C2025002

GIGAIPC CO., LTD.

GIGABYTE TECHNOLOGY GROUP

B2, No. 207-1, Sec. 3, Beixin Rd., Xindian Dist.,
New Taipei City 231030, Taiwan (R.O.C)

TEL : +886-2-89131312

FAX : +886-2-89131332

Email : sales@gigaipc.com

URL : www.gigaipc.com

技宸股份有限公司

技嘉集團

231030 新北市新店區北新路三段207-1號B2樓


TEL : +886-2-89131312

FAX : +886-2-89131332

Email : sales@gigaipc.com

URL : www.gigaipc.com

GIGABYTE™
GROUP



www.gigaipc.com