

## mITX-H110B (MH110AI)

Mini-ITX with Intel® H110 Chipset, support 7th/6th Generation Intel® Core™ Processor, Dual channel DDR4 memory, PCIe , 2 x COM, 10 x USB, 2 x SATA 6Gb/s



### Features


- Mini-ITX form factor
- Support 7th/ 6th Generation Intel® Core™ Processors
- Intel® H110 Express Chipset
- Dual Channel DDR4, 2 x SO-DIMMs
- 6 x GbE LAN Ports
- 2 x SATA 6Gb/s Ports
- HDMI, D-Sub ports for multiple display
- 2 x COM Ports (RS-232/422/485 & RI/5V/12V)

### Specifications


Form Factor	Mini-ITX 170W x 170D (mm)
CPU	Support for 7th/6th Generation Intel® Core™ i7/i5/i3, Pentium® and Celeron® processors in the LGA1151 package TDP under 65W L3 cache varies with CPU
Socket	1 x LGA 1151
Chipset	Intel® H110 Express Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB Support Dual channel DDR4 2400/2133 MHz memory modules
Ethernet	6 x GbE LAN Ports (1 x Intel® I219V and 5 x Intel® I211AT)
Video	Integrated Graphics Processor - depends on CPU: 1 x HDMI 1.4 port, supporting a maximum resolution of 4096x2160 @30Hz 1 x VGA port, supporting a maximum resolution of 1920x1200 @60Hz  (2 independent display outputs)
Audio	Realtek® Audio Codec
Storage	2 x SATA 6Gb/s Ports
Raid	—
Expansion Slots	1 x PCIe x16 (Gen3 x16) 1 x Full-size mSATA 1 x 2280/2242 M.2 M-Key (SATA 6Gb/s)

Internal I/O	1 x 4-pin ATX main power connector 2 x SATA power connectors 1 x CPU fan header 1 x System fan header 1 x Front panel header 1 x Front panel audio header 1 x 2W Speaker out header 6 x USB 2.0 headers 2 x COM headers (RS-232/422/485 & RI/5V/12V) 1 x GPIO (8-bits) & SMBus header 1 x Clear CMOS jumper 1 x Buzzer 1 x AT/ATX mode select jumper
Rear I/O	3 x Audio Jacks (Line in, Line out, Mic in) 1 x HDMI 1 x VGA 6 x RJ45 LAN Ports 4 x USB 3.2 Gen 1 1 x DC Jack (+12V/+19V/+24VDC)
TPM	1 x TPM header
OS	Windows 10 (x64)
Compatibility	Windows 7 (x64)
Operating Properties	Operating temperature: 0°C to 60°C Operating humidity: 0-90% (non-condensing) Non-operating temperature: -20°C to 70°C Non-operating humidity: 0%-95% (non-condensing)
Packing Content	Carton size: 465 x 351 x 217 (mm) Packing Capacity: 10pcs  Single Box size: 221 x 178 x 65 (mm)  Including: IO Shield x 1 (P/N: 12AIO-MH1100-00R) Screw Flat Head M2*2.5 x 1 (P/N: 12KS2-110202-01R) Screw Stand Off x 1 (P/N: 12KSF-F10303-20R) SATA power Cable x 1 (P/N: 25CRI-200B02-K1R) Screw I Head M2x3L x 1 (P/N: 25KSG-130032-S0R)
Order Information	9MH110AIMR-SI (Box packing)

GIGAIPC reserves the right to modify or change technical data without prior notice.

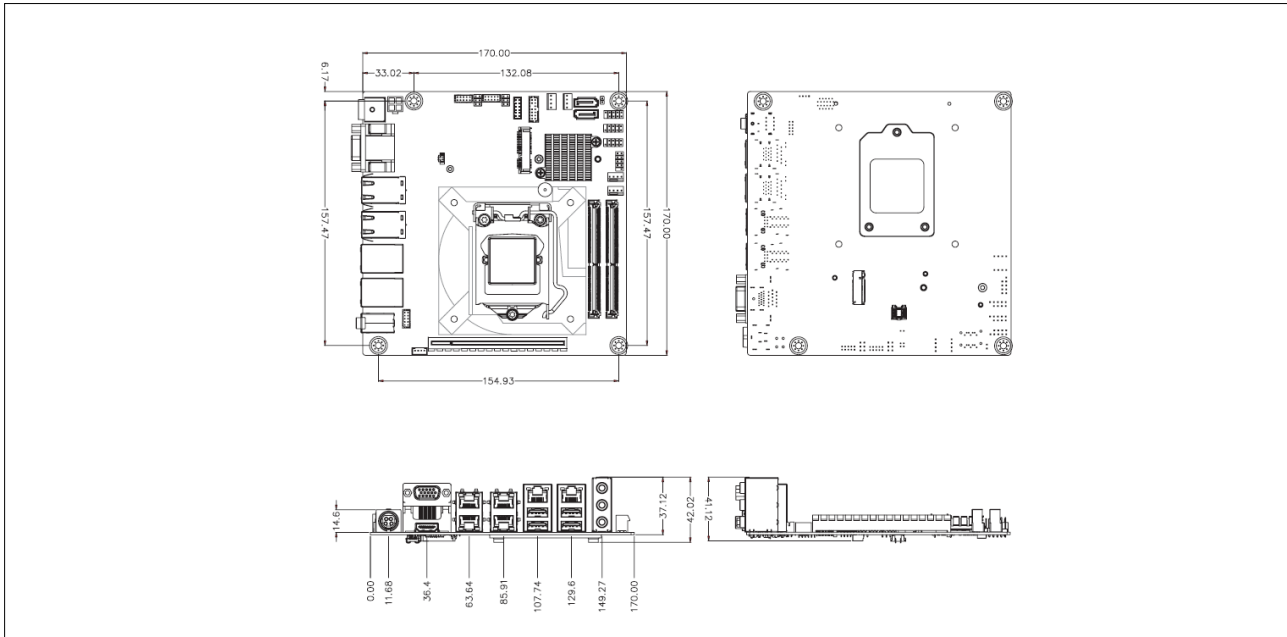

## Block Diagram

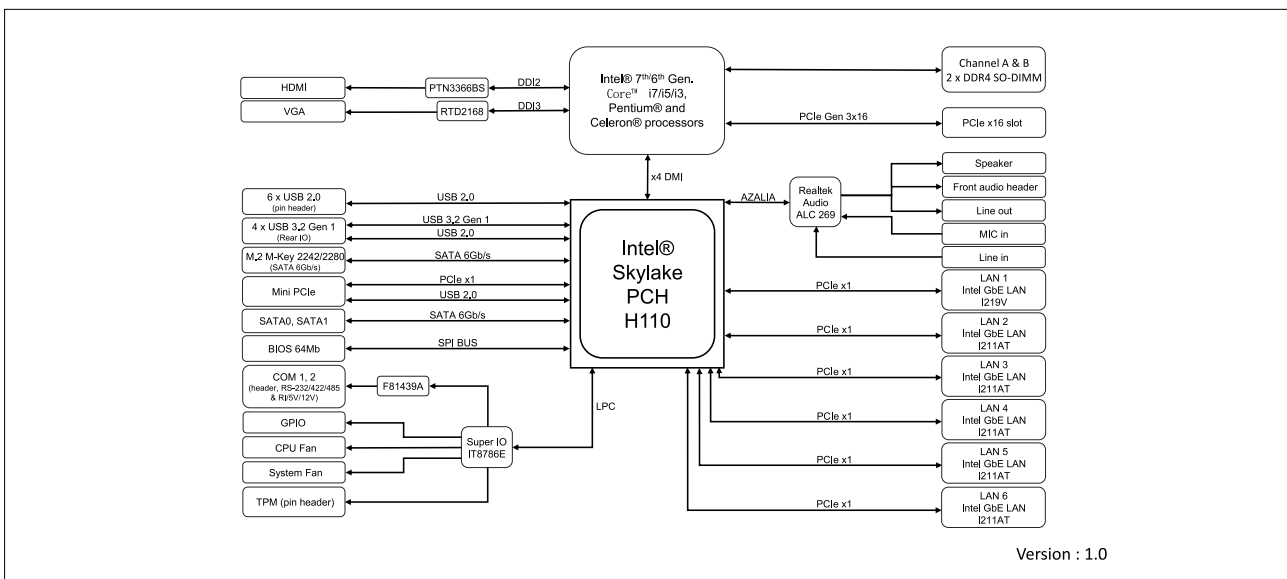

## Optional Kit

Part No.	Description	Quantity
9CTM000NR-00	TPM 2.0 module	1
25ST0-039520-Y0R	CPU Cooler	1
12KRH-0A1155-30R	CPU Cooler Backplate	1

GIGAIPC reserves the right to modify or change technical data without prior notice.