

# SDM-7300L

Intel® Smart Display Module with Intel® i5-7300U Processor, Intel® vPro support



## Features

- Intel® Core™ i5-7300U Processor
- Intel® vPro support
- Dual Channel DDR4, 2 x SO-DIMMs
- HDMI and DP for dual display outputs
- 1 x GbE LAN Port
- Ultra-Fast M.2 with SATA/PCIe Gen3 x4 interface
- 4 x USB 3.2 Gen 1

## Specifications

Form Factor	SDM-Large 175W x 100D (mm)
CPU	Intel® Core™ i5-7300U Processor 14nm, 2 cores, 4 threads, up to 3.5 GHz TDP 15W, Intel® vPro support
Socket	1 x FCBGA1356
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 32 GB Support Dual Channel DDR4 2133 MHz memory modules
Ethernet	1 x GbE LAN Port (Intel® I219LM)
Video	Integrated Graphics Processor - Intel® HD Graphics 620: 1 x HDMI 2.0 (SDM), supporting a maximum resolution of 4096x2160 @60Hz 1 x Display Port (Rear/SDM), supporting a maximum resolution of 4096x2160 @60Hz  (2 independent display outputs)
Audio	Intel® Integrated Audio
Storage	—
RAID	—
Expansion Slots	1 x 2280 M.2 M-Key (PCIe x4, SATA 6Gb/s) 1 x 2230 M.2 E-key (WiFi/BT)
Rear I/O	1 x Display Port 1 x RJ45 LAN Port 4 x USB 3.2 Gen 1 1 x PWR LED 1 x HDD LED 2 x External Antenna Holes (Optional) 1 x Reset button 1 x Power button
TPM	1 x TPM header
OS Compatibility	Windows® 10 (x64)
Operating Properties	Operating temperature: 0°C to +55°C Operating humidity: 0-90% (non-condensing) Non-operating temperature: -40°C to +85°C Non-operating humidity: 0%-95% (non-condensing)


## Application Scenarios

- Digital Signage
- Menu Board
- Video Wall
- Interactive Whiteboard

GIGAIPC reserves the right to modify or change technical data without prior notice.

## Dimension

Unit: mm

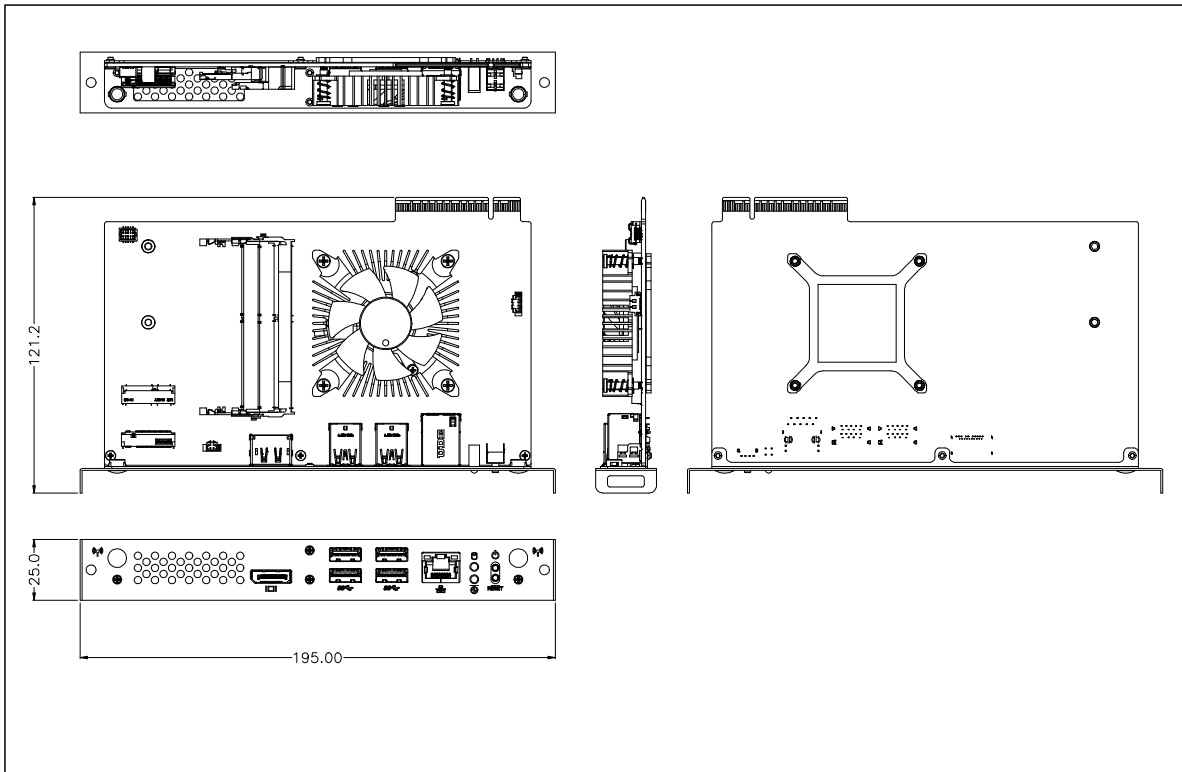

## Packing Content

- Carton size: 465 x 351 x 217 (mm)
- Packing Capacity: 10pcs
- Including:
  - Screw Kit with #0 Ziplock Bag Screw-Bind M3.0 x L5.0 NI x 2PCS (P/N: 25KSD-130053-S0R)

## Order Information

- SDM: 9MFLP5ALMR-SI (Box packing)

## Optional Accessories

- TPM 2.0 module: 9CTM000NR-00
- TPM Cable: 25CRZ-100600-S9R

2023/2/18