

## QBIX-JMB-ADLA67EH-A1

Industrial System with Intel® Q670E Chipset, Support for Intel® 14th/13th/12th Gen. Processor/  
 Display Port/ DVI-D port/ VGA port/ 2 x USB 3.2 Gen 1/ 2 x USB 3.2 Gen 2x1/ 6 x USB 2.0/ 4 x COM Ports/  
 1 x 2.5GbE LAN Port/ 3 x GbE LAN Ports /M.2 slots



### Features

- System Size: 224W x 256.1D x 77.7H (mm)
- Support Intel® 14th/13th/12th Gen. Processor
- Dual Channel DDR4, 2 x SO-DIMMs
- DVI-D, VGA & DP Ports for Multiple Display
- 1 x 2.5GbE LAN Port
- 3 x GbE LAN Ports
- 4 x COM Ports
- 10 x USB Ports

### Specifications


Dimension	224W x 256.1D x 77.7H(mm)
CPU	Support for 14th/13th/12th Generation Intel® Core™ i9/i7/i5/i3, Pentium® and Celeron® processors in the LGA1700 package TDP under 65W
Chipset	Intel® Q670E Chipset
Memory	2 x DDR4 SO-DIMM sockets, Max. Capacity 64GB Support Dual channel DDR4 3200 MHz memory modules
Ethernet	1 x 2.5GbE LAN Port (Intel® I226V) 1 x GbE LAN Port (Intel® I219LM, Vpro support) 2 x GbE LAN Ports (Intel® I211AT)
Graphic support	Integrated Graphics Processor - depends on CPU: 1 x DP port, supporting a maximum resolution of 4096x2160 @60Hz 1 x DVI-D port, supporting a maximum resolution of 1920x1080 @60Hz 1 x VGA port, supporting a maximum resolution of 1920x1200 @60Hz  (3 independent display outputs)

Audio	Realtek® ALC897
Storage	4 x 2.5" HDD/SSD (SATA 6Gb/s)
Raid	RAID 0/1/5/10
Expansion Slots	1 x 2280 M.2 M-Key (PCIe Gen4x4) 1 x 2230 M.2 E-Key (WiFi/BT) 1 x Full-size Mini PCIe with SIM slot
Front I/O	1 x Power Switch/ Power/ HDD LED 3 x Audio Jacks (Line in, Line out, Mic in) 1 x Display port 1 x DVI-D 1 x VGA 2 x COM Ports (RS-232/422/485 & RI/5V/12V) 2 x COM Ports (RS-232) 3 x RJ45 GbE LAN Ports 1 x RJ45 2.5GbE LAN Port 2 x USB 3.2 Gen 2x1 2 x USB 3.2 Gen 1 6 x USB 2.0 1 x 4-pin Terminal Block 2 x External Antenna Holes (Optional)
Power	+12V~48VDC (Full Range)
Operation Temperature	Operating temperature: -20°C to 50°C (CPU TDP 65W) Operating temperature: -20°C to 60°C (CPU TDP 35W) Operating humidity: 0-90% (non-condensing) Non-operating temperature: -40°C to 85°C Non-operating humidity: 0%-95% (non-condensing) Use wide temperature range memory and storage
Vibration During Operation	Operation: IEC 60068-2-64, 3 Grms, random, 5 ~ 500 Hz, 1 hr / Per Axis, with SSD/M.2 2280 Non-operation: IEC 60068-2-6, 2 G, Sine, 10 ~ 500 Hz, 1 Oct/min, 1 hr / Per Axis
Shock During Operation	Operation: IEC 60068-2-27, 50 G, half sine, 11 ms duration, With SSD

GIGAIPC reserves the right to modify or change technical data without prior notice.

## Dimension

Unit: mm

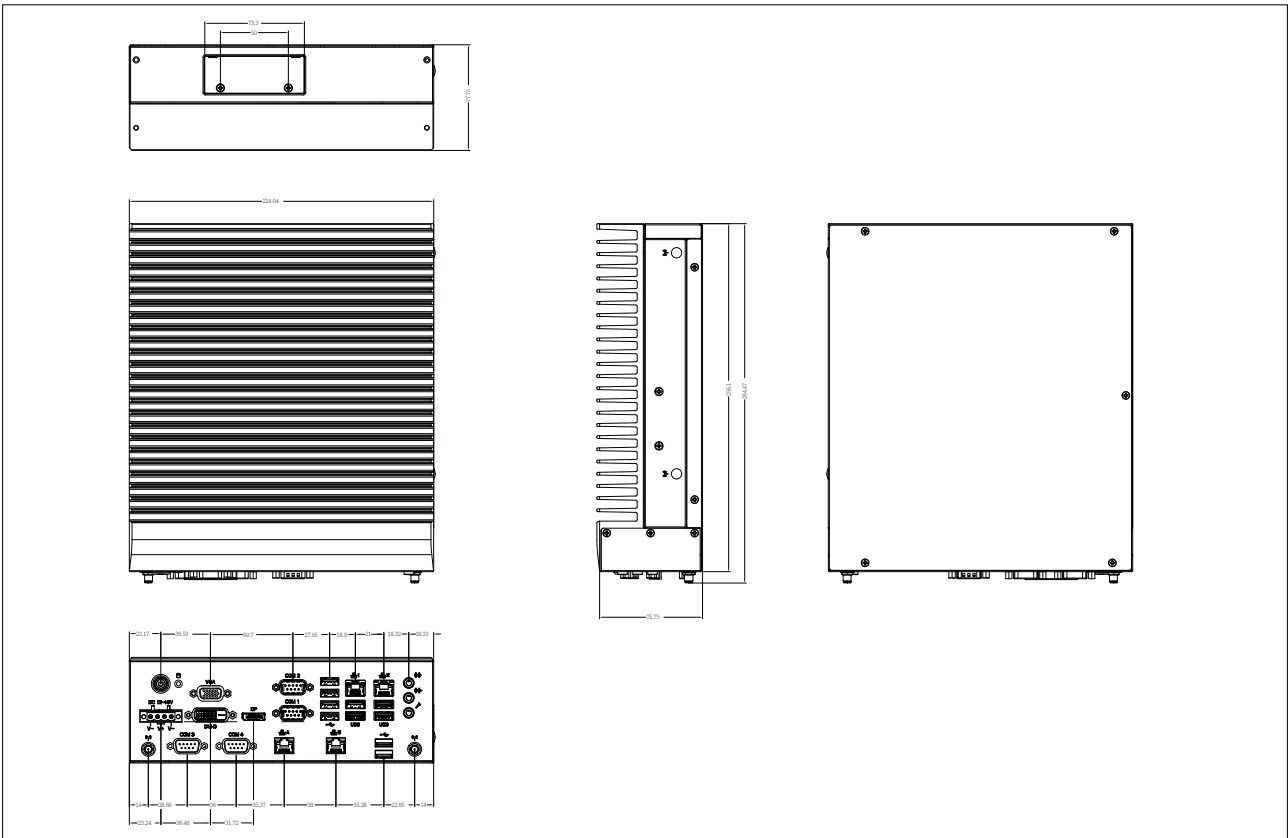

## Packing Content

- Carton size: 300 x 351 x 166 (mm)
- Packing Capacity: 1
- Including:
  - Screw M3x4L x 20 (P/N: 25984G-1C014-S00)
  - Terminal Blocks Male Plug x 1 (P/N: 25I00-2ESDV0-D2R)

## Order Information

- System: 6BQJQ67EAMR-SI (Box packing)

2024/4/14

GIGAIPC reserves the right to modify or change technical data without prior notice.